



Applications	Commercial Grade	
	Shield Magnetic Shield	
Feature	Multilayer Multilayer	
	Ferrite Core	
Series Type	MLF	
Status	Production	
Brand	ТДК	

Size		
Length(L)	2.00mm ±0.20mm	
Width(W)	1.25mm ±0.20mm	
Thickness(T)	1.25mm ±0.20mm	
Recommended Land Pattern (A)	0.80mm Nom.	
Recommended Land Pattern (B)	1.00mm Nom.	
Recommended Land Pattern (C)	1.20mm Nom.	

Electrical Characteristics		
Inductance	82µH ±10% at 1MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]		
Rated Current (Temperature Rise) [Typ.]		
Rated Current (Temperature Rise) [Max.]	2mA	
DC Resistance [Typ.]	2.4Ω	
DC Resistance [Max.]	3Ω	
Self Resonant Frequency [Min.]	8MHz	
Self Resonant Frequency [Typ.]	14MHz	
Q [Min.]	25	
Q [Typ.]	45	

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 85°C	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	
Weight	0.014g	


Images are for reference only and show exemplary products.
This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.



MLF2012C820KT000



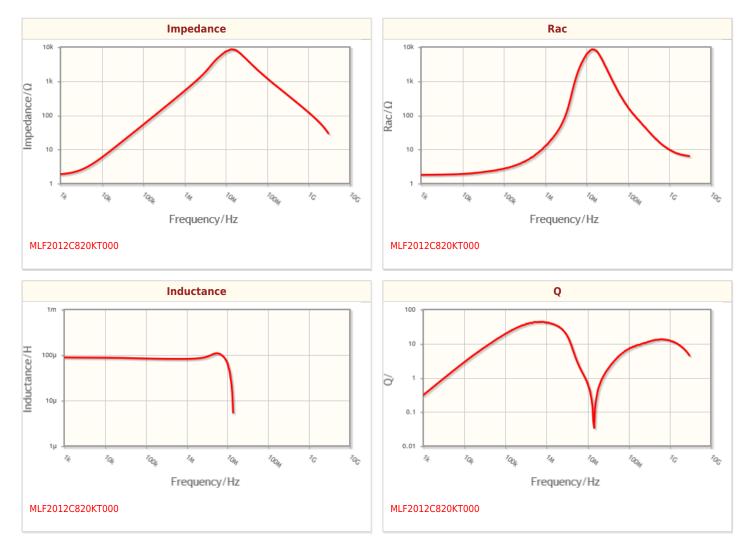

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.



MLF2012C820KT000



Associated Images



! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.