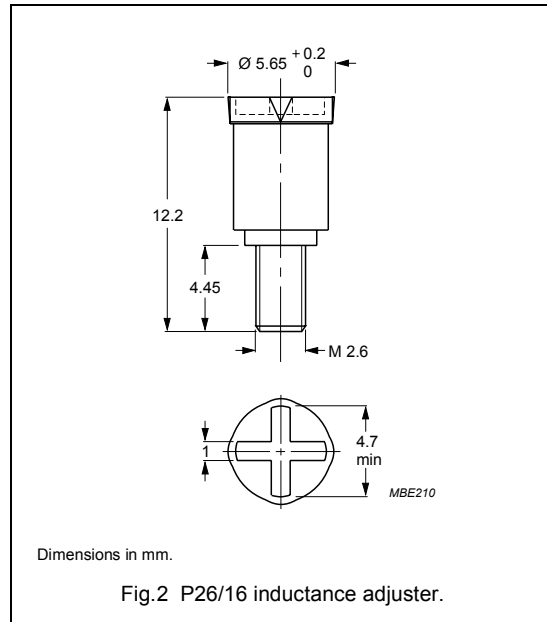


INDUCTANCE ADJUSTERS**General data**

PARAMETER	SPECIFICATION
Material of head and thread	polypropylene (PP), glass fibre reinforced
Maximum operating temperature	125 °C

**Inductance adjuster selection chart ^{sup} (applies to all types)**

GRADE	A _L (nH)	TYPES FOR LOW ADJUSTMENT	ΔL/L ⁽¹⁾	TYPES FOR MEDIUM ADJUSTMENT	ΔL/L ⁽¹⁾	TYPES FOR HIGH ADJUSTMENT	ΔL/L ⁽¹⁾
3H3	63	—	—	—	—	ADJ-P26-RED	25
	100	—	—	—	—	ADJ-P26-RED	22
	160	—	—	ADJ-P26-RED	15	—	—
	250	ADJ-P26-RED	10	—	—	ADJ-P26-BROWN	23
	315	ADJ-P26-RED	8	—	—	ADJ-P26-BROWN	18
	400	ADJ-P26-RED	6	ADJ-P26-BROWN	13	ADJ-P26-GREY	25
	630	ADJ-P26-BROWN	8	ADJ-P26-GREY	16	—	—
	1000	ADJ-P26-BROWN	5	ADJ-P26-GREY	9	—	—
	1600	—	—	ADJ-P26-GREY	5	—	—
3D3	100	—	—	—	—	ADJ-P26-RED	21
	160	—	—	ADJ-P26-RED	14	—	—
	250	ADJ-P26-RED	9	—	—	ADJ-P26-GREY	35
	400	—	8	ADJ-P26-GREY	17	—	—

Note

1. Maximum adjustment range.