# Multilayer Ceramic Chip Capacitors

## C2012X8R1H224K125AE









#### **TDK item description** C2012X8R1H224KT\*\*\*S

Applications	Commercial Grade  Please refer to Part No. CGA4J3X8R1H224K125AE for Automotive use.	
Feature	150°C High Temperature Application  Soft Soft Termination	
Series	C2012 [EIA 0805]	
Status	Production	



Size		
Length(L)	2.00mm +0.45,-0.20mm	
Width(W)	1.25mm +0.25,-0.20mm	
Thickness(T)	1.25mm +0.25,-0.20mm	
Terminal Width(B)	0.20mm Min.	
Terminal Spacing(G)	0.50mm Min.	
Recommended Land Pattern (PA)	1.00mm to 1.30mm(Flow Soldering)	
recommended Land Pattern (FA)	0.90mm to 1.20mm(Reflow Soldering)	
Recommended Land Pattern (PB)	1.00mm to 1.20mm(Flow Soldering)	
Neconinented Land Pattern (FB)	0.70mm to 0.90mm(Reflow Soldering)	
Recommended Land Pattern (PC)	0.80mm to 1.10mm(Flow Soldering)	
necommended Land Fattern (FC)	0.90mm to 1.20mm(Reflow Soldering)	

Electrical Characteristics			
Capacitance	220nF ±10%		
Rated Voltage	50VDC		
Temperature Characteristic	X8R(±15%)		
Dissipation Factor (Max.)	3%		
Insulation Resistance (Min.)	2272ΜΩ		

Other	
Coldoring Method	Wave (Flow)
Soldering Method	Reflow
AEC-Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs

<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

#### C2012X8R1H224K125AE














# Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

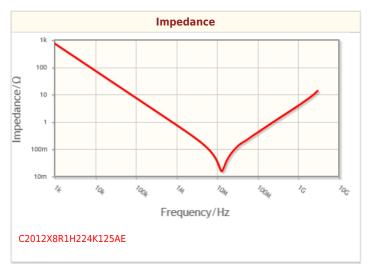


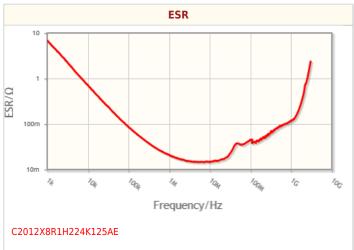

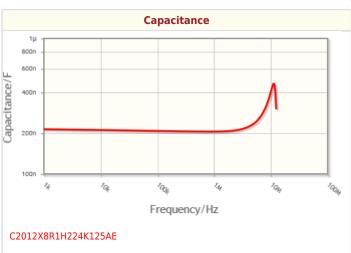

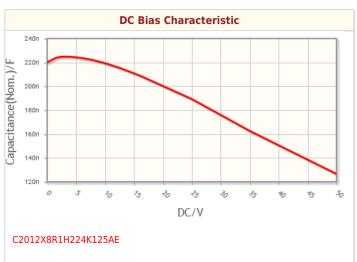

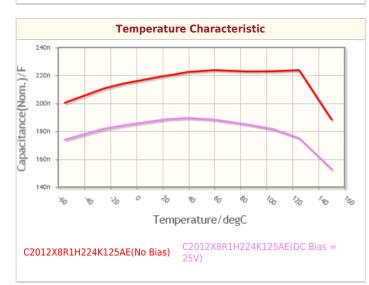

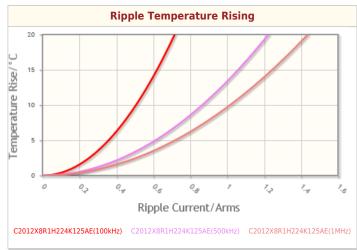

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

## C2012X8R1H224K125AE










# **Associated Images**

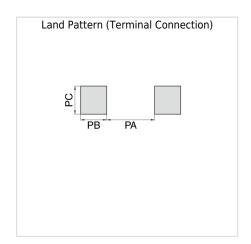

<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.