


**18N60****Power MOSFET****18A,600V N-CHANNEL
POWER MOSFET****DESCRIPTION**

The UTC **18N60** uses UTC's advanced proprietary, planar stripe, DMOS technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

FEATURES


- * $R_{DS(ON)} \leq 0.5\Omega$ @ $V_{GS}=10V$, $I_D=9A$
- * Ultra Low Gate Charge (Typical 50nC)
- * Low Reverse Transfer Capacitance (C_{RSS} = Typical 23pF)
- * Fast Switching Capability
- * Avalanche Energy Specified
- * Improved dv/dt Capability, High Ruggedness

SYMBOL**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
18N60L-T3P-T	18N60G-T3P-T	TO-3P	G	D	S	Tube
18N60L-T47-T	18N60G-T47-T	TO-247	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

18N60L-T3P-T (1)Packing Type (2)Package Type (3)Green Package	(1) T: Tube (2) T3P: TO-3P, T47: TO-247 (3) L: Lead Free, G: Halogen Free and Lead Free
---	--

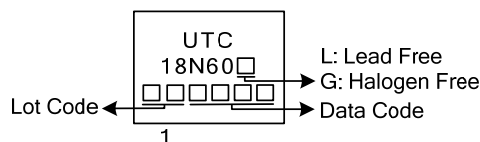MARKING

■ **ABSOLUTE MAXIMUM RATINGS** ($T_c = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	600	V
Gate-Source Voltage		V_{GSS}	± 30	V
Continuous Drain Current		I_D	18	A
Pulsed Drain Current		I_{DM}	45	A
Avalanche Current		I_{AR}	18	A
Avalanche Energy	Single Pulsed	E_{AS}	1000 (Note 2)	mJ
	Repetitive	E_{AR}	30	
Peak Diode Recovery dv/dt		dv/dt	10	V/ns
Power Dissipation	TO-247	P_D	360	W
	TO-3P		395	W
Junction Temperature		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. $L=6.18\text{mH}$, $I_{AS}=18\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$

■ **THERMAL DATA**





PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-247	θ_{JA}	40	$^\circ\text{C/W}$
	TO-3P		30	
Junction to Case	TO-247	θ_{JC}	0.35	$^\circ\text{C/W}$
	TO-3P		0.32	

■ **ELECTRICAL CHARACTERISTICS** ($T_J = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	600			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =600V, V _{GS} =0V			25	μA
Gate-Body Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±30V			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2.0		4.0	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =9A (Note)		0.36	0.5	Ω
DYNAMIC PARAMETERS						
Input Capacitance	C _{ISS}	V _{DS} =25V, V _{GS} =0V, f=1MHz		2500		pF
Output Capacitance	C _{OSS}			280		pF
Reverse Transfer Capacitance	C _{RSS}			23		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	t _{D(ON)}	V _{GS} =10V, V _{DS} =0.5V _{DSS} , I _D =18A, R _G =5Ω (External)		21		ns
Turn-ON Rise Time	t _R			22		ns
Turn-OFF Delay Time	t _{D(OFF)}			62		ns
Turn-OFF Fall-Time	t _F			22		ns
Total Gate Charge	Q _G	V _{GS} =10V, V _{DS} =0.5V _{DSS} , I _D =9A		50		nC
Gate Source Charge	Q _{GS}			15		nC
Gate Drain Charge	Q _{GD}			18		nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source Diode Forward Voltage	V _{SD}	I _F =I _S , V _{GS} =0V (Note)			1.5	V
Maximum Continuous Drain-Source Diode Forward Current	I _S	V _{GS} =0V			18	A
Maximum Pulsed Drain-Source Diode Forward Current	I _{SM}	Repetitive			54	A
Reverse Recovery Time	t _{rr}	V _{GS} =0V, dI _F /dt=100A/μs,			200	ns
Reverse Recovery Charge	Q _{RR}	I _S =18A, V _R =100V		0.8		μC

Note: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.

■ TYPICAL CHARACTERISTICS

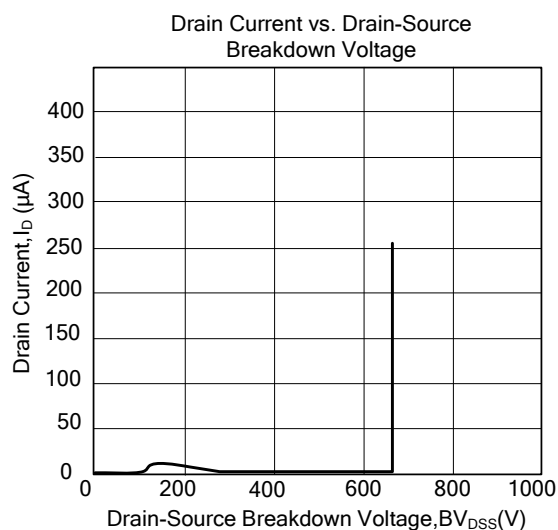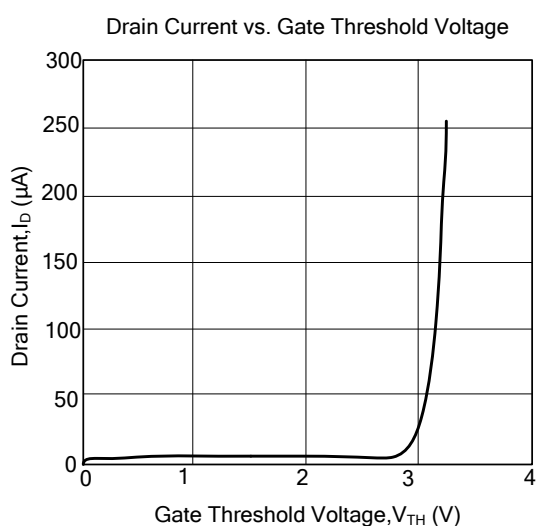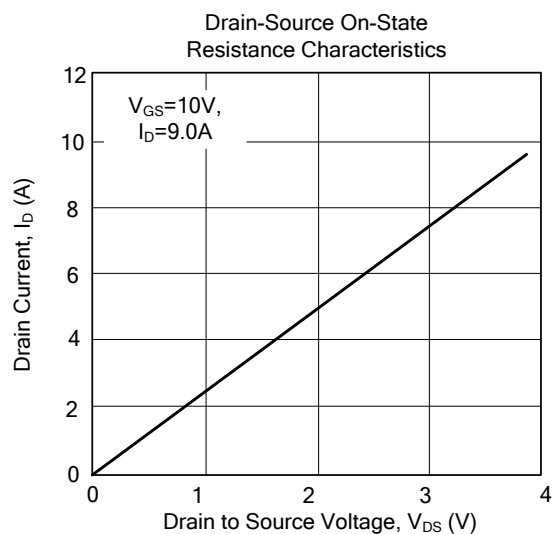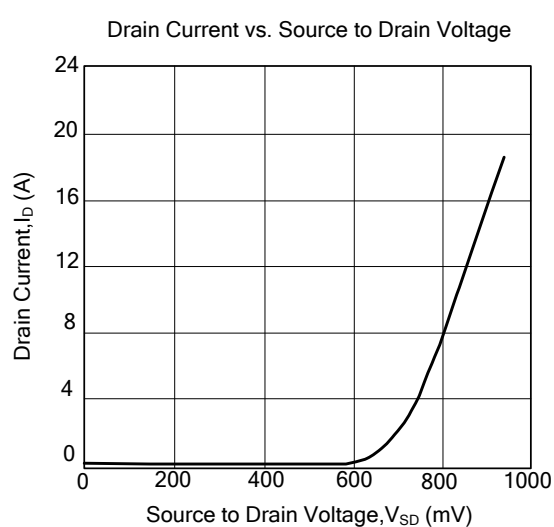

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.