


CC45SL3AD680JYVNA



<b>Applications</b>	Commercial Grade
<b>Feature</b>	<p><b>High</b> High Voltage (1000V and over)</p> <p><b>Low D</b> Low Dissipation</p> <p><b>Halogen-free</b> Halogen-free</p>
<b>Series</b>	CC45
<b>Status</b>	Production



Size	
Diameter(D)	5.50mm Max.
Thickness(T)	5.00mm Max.
Lead Gap(F)	5.00mm +0.80,-0.20mm
Lead Diameter(d)	0.60mm ±0.05mm

Electrical Characteristics	
Capacitance	68pF ±5%
Rated Voltage	1kVDC
Withstanding Voltage	2kVDC
Temperature Characteristic	SL(0+350,-1000ppm/°C)
Q (Min.)	1000
Insulation Resistance (Min.)	10000MΩ



Other	
Soldering Method	Wave (Flow) Iron Soldering
Lead Length / Package Type	Taping
AEC-Q200	No
Package Quantity	1000pcs

! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.

CC45SL3AD680JYVNA



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

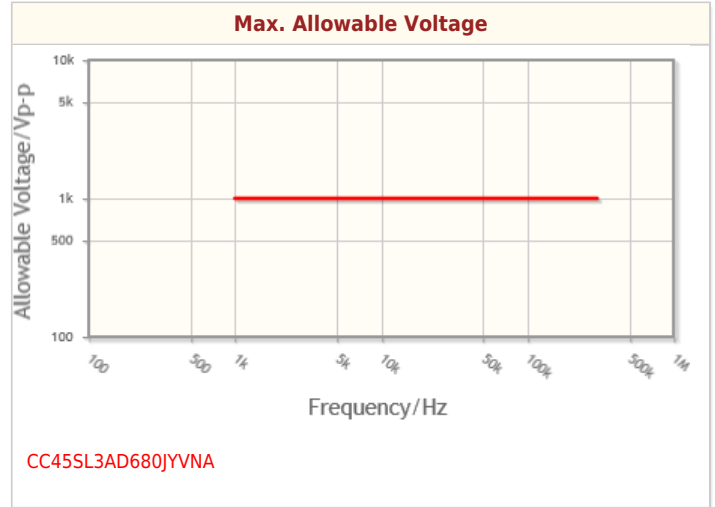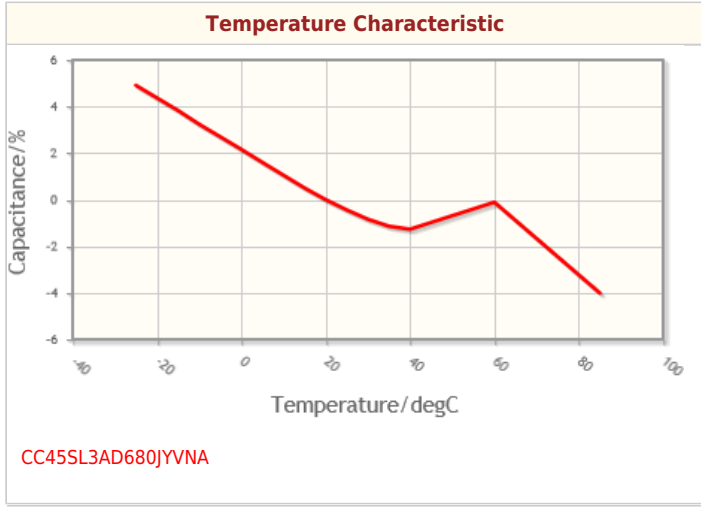

! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.