
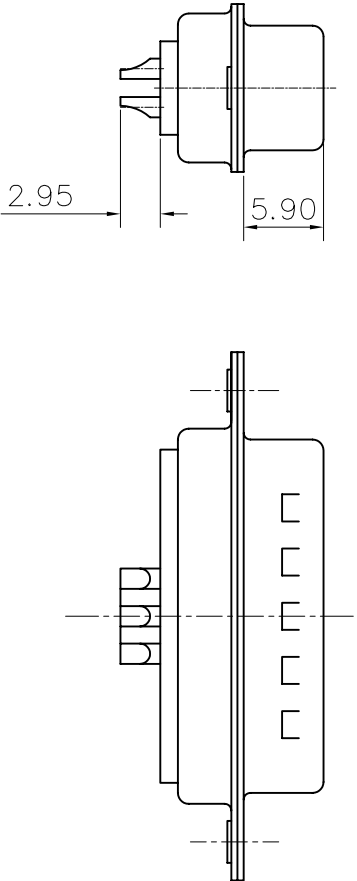


This document is the property of Amphenol Corporation and is delivered on the understanding that it contains confidential information and is not to be reproduced, stored in a retrieval system, or used by anyone other than the intended recipient. If you are not the intended recipient, you are notified that disclosing, copying, distributing, taking action in reliance on the contents of this information, or taking any action in reliance on the contents of this information is strictly prohibited.

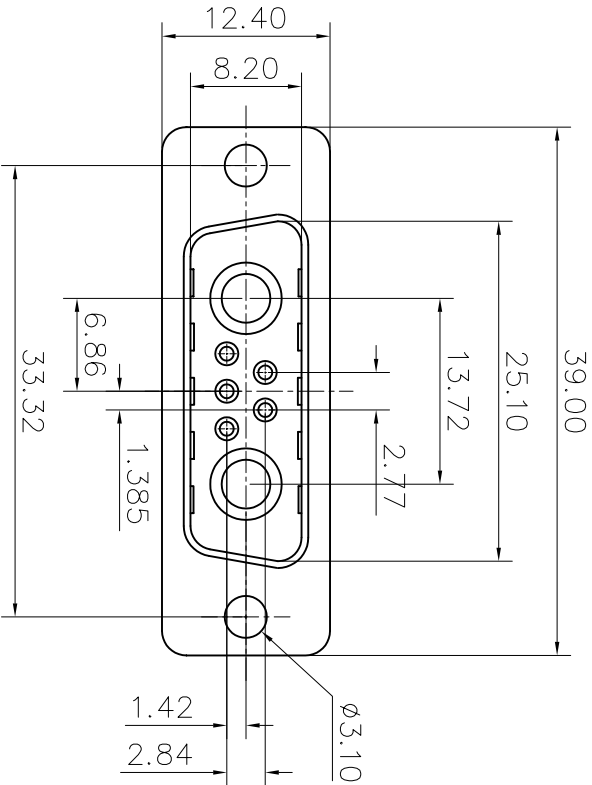


REVISIONS			
SYM	ECN	DESCRIPTION	DATE
A			05/31/07

D-SUB TECHNICAL DATA

SHELL : Steel 2.5um(100u") min tin over 1.25um(50u") min nickel
BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0
Color Black
CONTACT: brass, 0.4um (16u") gold over 1.25um(50u") min Nickel
ELECTRICAL : Voltage rating 300 V RMS at 50 Hz
Current rating 10 to 40A
Withstanding Voltage >1000 V RMS at 50 Hz for one minute
Insulation resistance >5000 M Ohms
Contact resistance 20 mOhms max.
CLIMATIC : Temperature range -55 °C up to 155°C
Damp heat 56 days(40 °C-95% HR)
MARKING : Amphenol-...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 717TW A TW2 P

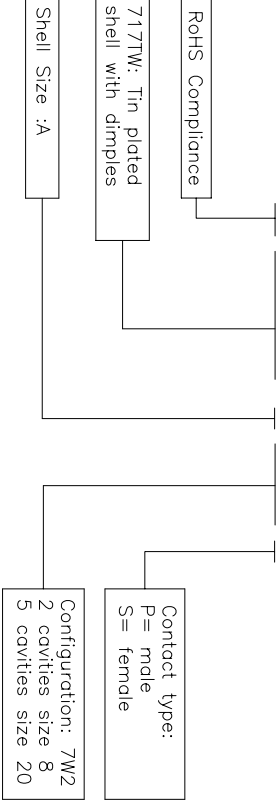

UNLESS OTHERWISE SPECIFIED			
TOLERANCES		APPROVAL	
U.S.	METRIC	DRAWN	DATE
±.010	0.50	5/30/07	5/30/07
±.005	0.30	CHECKED	14.0000
FRACTIONS ±.005	0.20		
ANGLES ±.5°	2°		
FOR MATERIALS AND FINISHES			
SEE NOTES			
REMOVE SHARP EDGES			
DIMENSIONS		DRAWING FILE :	
U.S.	INCHES	PE master/drawing/Draw	
MIL	MM	ANGLE OF PROJECTION	
		TITLE	
		Hybrid connector, TW series	
		SIZE	REV.
		A4	A
		SCALE	SHEET 1 OF 1