

## TO-252-2L Plastic-Encapsulate Voltage Regulators


Three-terminal positive voltage regulator

### Description


● This monolithic integrated circuit is an adjustable 3-terminal positive voltage regulator designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 37V. It employs internal current limiting, thermal shut-down and safe area compensation.

### Feature


- Internal thermal overload protection
- Internal short circuit current limiting
- Output transistor safe operating area compensation

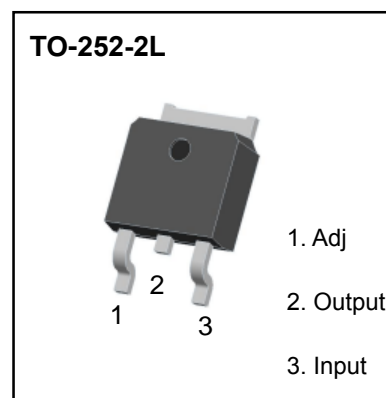

### Internal Block Diagram

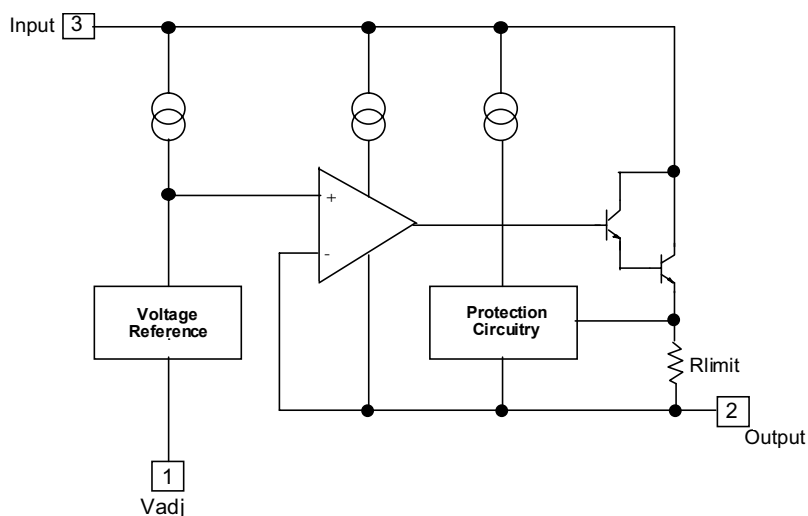

### Typical Application

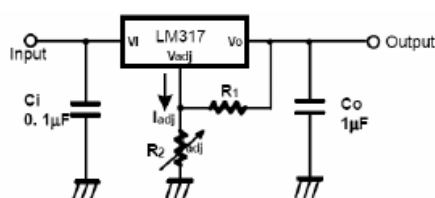

$$V_O = 1.25V (1 + R_2 / R_1) + I_{adj} R_2$$

C<sub>i</sub> is required when regulator is located an appreciable distance from power supply filter.

C<sub>o</sub> is not needed for stability, however, it does improve transient response.

Since I<sub>ADJ</sub> is controlled to less than 100 μA, the error associated with this term is negligible in most applications.

## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

### Limiting Values (Absolute Maximum Rating)

Symbol	Parameter	Value	Units
$V_I-V_O$	Input-Output Voltage Differential	40	V
$T_{LEAD}$	Lead Temperature	230	$^\circ\text{C}$
$P_D$	Power Dissipation	Internally limited	W
$T_J$	Operating Junction Temperature Range	0~125	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~125	
$\Delta V_O / \Delta T$	Temperature Coefficient of Output Voltage	$\pm 0.02$	$\% / ^\circ\text{C}$

### Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)


( $V_O-V_I=5\text{V}$ ,  $I_O=0.5\text{A}$ ,  $0^\circ\text{C}\leq T_J\leq +125^\circ\text{C}$ ,  $I_{MAX}=1.5\text{A}$ ,  $P_{DMAX}=20\text{W}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Line Regulation(note1)	$R_{line}$	$T_A=25^\circ\text{C}$ $3\text{V}\leq V_I-V_O\leq 40\text{V}$		0.01	0.04	$\%/V$
		$3\text{V}\leq V_I-V_O\leq 40\text{V}$		0.02	0.07	
Load Regulation(note1)	$R_{load}$	$T_A=25^\circ\text{C}$ , $10\text{mA}\leq I_O\leq I_{MAX}$ $V_O<5\text{V}$ $V_O\geq 5\text{V}$		18 0.4	25 0.5	mV
		$10\text{mA}\leq I_O\leq I_{MAX}$ $V_O<5\text{V}$ $V_O\geq 5\text{V}$		40 0.8	70 1.5	
Adjustable Pin Current	$I_{ADJ}$	-		46	100	$\mu\text{A}$
Adjustable Pin Current Change	$\Delta I_{ADJ}$	$3\text{V}\leq V_I-V_O\leq 40\text{V}$ $10\text{mA}\leq I_O\leq I_{MAX}$ , $P_D\leq P_{MAX}$		2.0	5	
Reference Voltage	$V_{REF}$	$3\text{V}\leq V_{IN}-V_O\leq 40\text{V}$ $10\text{mA}\leq I_O\leq I_{MAX}$ , $P_D\leq P_{MAX}$	1.20	1.25	1.30	V
Temperature Stability	$ST_T$	-		0.7		$\%/V_O$
Minimum Load Current to Maintain Regulation	$I_{L(MIN)}$	$V_I-V_O=40\text{V}$		3.5	12	mA
Maximum Output Current	$I_{O(MAX)}$	$V_I-V_O\leq 15\text{V}$ , $P_D\leq P_{MAX}$ $V_I-V_O\leq 40\text{V}$ , $P_D\leq P_{MAX}$ $T_A=25^\circ\text{C}$	1.0	2.2 0.3		A
RMS Noise, % of $V_{OUT}$	$e_N$	$T_A=25^\circ\text{C}$ , $10\text{Hz}\leq f\leq 10\text{KHz}$		0.003	0.01	$\%/V_O$
Ripple Rejection	RR	$V_O=10\text{V}$ , $f=120\text{Hz}$ without $C_{ADJ}$ $C_{ADJ}=10\mu\text{F}$ (note2)	66	60 75		dB
Long-Term Stability, $T_J=T_{HIGH}$	ST	$T_A=25^\circ\text{C}$ for end point measurements, 1000HR		0.3	1	%
Thermal Resistance Junction to case	$R_{\theta JC}$	-		5		$^\circ\text{C}/\text{W}$

#### Notes:

1. Load and line regulation are specified at constant junction temperature. Change in  $V_D$  due to heating effects must be taken into account separately. Pulse testing with low duty is used. ( $P_{MAX}=20\text{W}$ )
2.  $C_{ADJ}$ . when used, is connected between the adjustment pin and ground.


## TO-252-2L Package Outline Dimensions

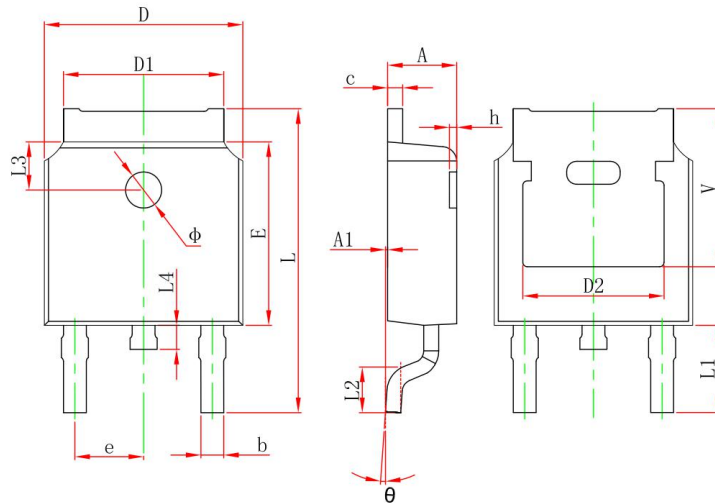

SYMBOL	MIN	MAX	SYMBOL	MIN	MAX
A	2.20	2.40	L1	2.90 REF	
A1	0.000	0.125	L2	1.40	1.70
b	0.66	0.86	L3	1.60 REF	
c	0.46	0.58	L4	0.60	1.00
D	6.50	6.70	Phi	1.10	1.30
D1	5.10	5.46	theta	0°	8°
D2	4.830 REF		h	0.00	0.30
E	6.00	6.20	V	5.35 REF	
e	2.186	2.386			
L	9.80	10.40			
Coplanar degrees	0	0.09			

Unit : mm

## TO-252-2L Suggested Pad Layout

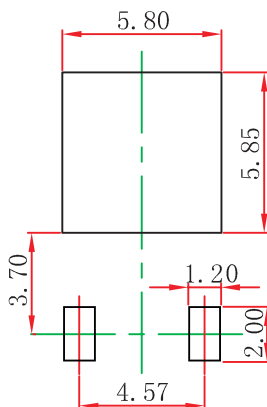

### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.

### NOTICE

JSHD reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSHD does not assume any liability arising out of the application or use of any product described herein.