


# OPS883

4th Generation Intel® Core™ i7/i5/i3 & Celeron® Processor Open Pluggable Specification (OPS) Digital Signage Player with Intel® Q87 Chipset and TPM 1.2



- |                     |                    |                      |
|---------------------|--------------------|----------------------|
| 1. JAE TX-25        | 6. Power Switch    | 11. 2 x USB 2.0      |
| 2. Optional Antenna | 7. Reset           | 12. 1 x USB 3.0      |
| 3. RS-232           | 8. HDD indicator   | 13. Optional Antenna |
| 4. Ethernet         | 9. Audio(Line-out) | 14. 2.5" SATA HDD    |
| 5. HDMI Output      | 10. Audio(Mic-in)  |                      |

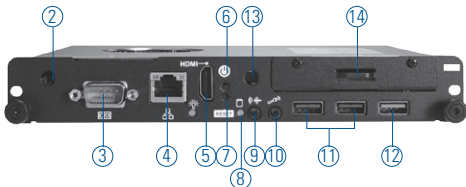

## Specifications


Main System	CPU	LGA1150 socket 4th generation Intel® Core™ processor (Haswell Refresh)
	Chipset	Intel® Q87
	System Memory	1 x 204 pin DDR3-1600 SO-DIMM max. up to 8 GB
	Storage	1 x 2.5" SATA HDD tray 1 x mSATA (Option)
	Watchdog Timer	255 levels, 1-255 sec.
I/O	2 x USB 2.0	
	1 x USB 3.0	
	1 x 10/100/1000Mbps Ethernet	
	1 x HDMI with 4K Resolution	
	1 x RS-232 (COM2)	
	1 x power on/off button	
	1 x reset button	
	1 x Audio (Line-out)	
	1 x Audio (Mic-in)	
	1 x Display Port (via OPS JAE interconnector)	
	2 x USB 2.0 (via OPS JAE interconnector)	
	1 x USB 3.0 (via OPS JAE interconnector)	
	1 x Audio (Line out, via OPS JAE interconnector)	
1 x UART (TX/RX, via OPS JAE interconnector) (COM1)		
Indicator	1 x LED for system power ON	
	1 x LED for HDD active	
WiFi	Optional Wi-Fi module	
Expansion Slot	1 x full-size PCI Express Mini card (USB+PCI Express Signal)	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")	
Packing Dimension	270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76")	
Weight (net/gross)	1 kg (2.21lb) / 1.5 kg (3.3 lb)	
Environmental	0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)	

## Packing

1 x driver CD
1 x thermal grease
2 x M2 x 5 screw
2 x M4 x 6 screw

## Features

- Intel® Open Pluggable Specification (OPS) compliance
- 4th Generation Intel® Core™ i7/i5/i3 & Celeron® processor (Haswell Refresh)
- Supports DDR3-1600 SO-DIMM max. up to 8 GB
- Supports 1 PCI Express Mini Card
- Supports TPM 1.2
- Easy installation and maintenance
- HDMI for 2nd display w/4K resolution
- Intel®AMT 9.0 supported

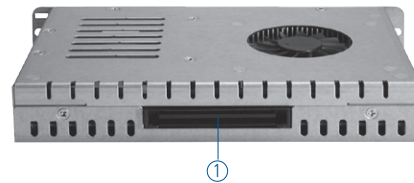

## Optional OS Installation

Windows® 7, Windows® 8.1

## Ordering Information

Standard	
OPS883	OPS digital signage player supports LGA1150 socket Intel® Core™ i7/i5/i3 & Celeron® processor with iAMT feature

Optional	
AX93167	OPS docking board with 4K solution

\* Specifications and photos are based on options and may vary

## Dimensions

