



WFM30-40P121

WFM

FORK SENSORS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

| Type | Part no. |
|--------------|----------|
| WFM30-40P121 | 6037823 |

Other models and accessories → www.sick.com/WFM

Detailed technical data

Features

| | |
|--|-----------------------------|
| Functional principle | Optical detection principle |
| Dimensions (W x H x D) | 10 mm x 50 mm x 59.5 mm |
| Housing design (light emission) | Fork shaped |
| Fork width | 30 mm |
| Fork depth | 42 mm |
| Minimum detectable object (MDO) | 0.8 mm |
| Light source | LED, visible red light |
| Adjustment | None |
| Output function | Dark switching |

Interfaces

| | |
|-------------------------------------|---|
| IO-Link functions | – |
| Advanced functions | – |
| Fieldbus, industrial network | - |
| Type of fieldbus integration | - |

Mechanics/electronics

| | |
|----------------------------|-----------------------------------|
| Supply voltage | 10 V DC ... 30 V DC ¹⁾ |
| Ripple | < 10 % ²⁾ |
| Power consumption | < 20 mA ³⁾ |
| Switching frequency | 4 kHz ⁴⁾ |

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ May not exceed or fall below U_V tolerances.

³⁾ Without load.

⁴⁾ With light/dark ratio 1:1.

⁵⁾ Signal transit time with resistive load.

⁶⁾ Reference voltage DC 50 V.

⁷⁾ Depending on fork width.

| | |
|---|---|
| Response time | 125 μs ⁵⁾ |
| Stability of response time | $\pm 15 \mu\text{s}$ |
| Switching output | PNP |
| Switching output (voltage) | PNP: HIGH = $V_S - \leq 1.5 \text{ V}$ / LOW = 0 V NPN: HIGH = approx. V_S / LOW $\leq 1.5 \text{ V}$ |
| Switching output | Dark switching |
| Output current I_{max} | 100 mA |
| Initialization time | 140 ms |
| Connection type | Cable, 3-wire, 2 m |
| Ambient light immunity | Sunlight: $\leq 10,000 \text{ lx}$ |
| Protection class | III ⁶⁾ |
| Circuit protection | U_V connections, reverse polarity protected Output Q short-circuit protected Interference pulse suppression |
| Enclosure rating | IP67 |
| Weight | Approx. 80 g ... 190 g ⁷⁾ |
| Housing material | Aluminum |

- 1) Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.
- 2) May not exceed or fall below U_V tolerances.
- 3) Without load.
- 4) With light/dark ratio 1:1.
- 5) Signal transit time with resistive load.
- 6) Reference voltage DC 50 V.
- 7) Depending on fork width.

Ambient data


| | |
|--------------------------------------|---|
| Ambient operating temperature | $-10 \text{ }^\circ\text{C} \dots +60 \text{ }^\circ\text{C}$ ¹⁾ |
| Ambient storage temperature | $-40 \text{ }^\circ\text{C} \dots +80 \text{ }^\circ\text{C}$ |
| Shock load | According to EN 60068-2-27 |
| UL File No. | NRKH.E191603 & NRKH7.E191603 |

- 1) Do not bend below 0 $^\circ\text{C}$.

Classifications

| | |
|-----------------------|----------|
| ECl@ss 5.0 | 27270909 |
| ECl@ss 5.1.4 | 27270909 |
| ECl@ss 6.0 | 27270909 |
| ECl@ss 6.2 | 27270909 |
| ECl@ss 7.0 | 27270909 |
| ECl@ss 8.0 | 27270909 |
| ECl@ss 8.1 | 27270909 |
| ECl@ss 9.0 | 27270909 |
| ETIM 5.0 | EC002720 |
| ETIM 6.0 | EC002720 |
| UNSPSC 16.0901 | 39121528 |

Dimensional drawing (Dimensions in mm (inch))

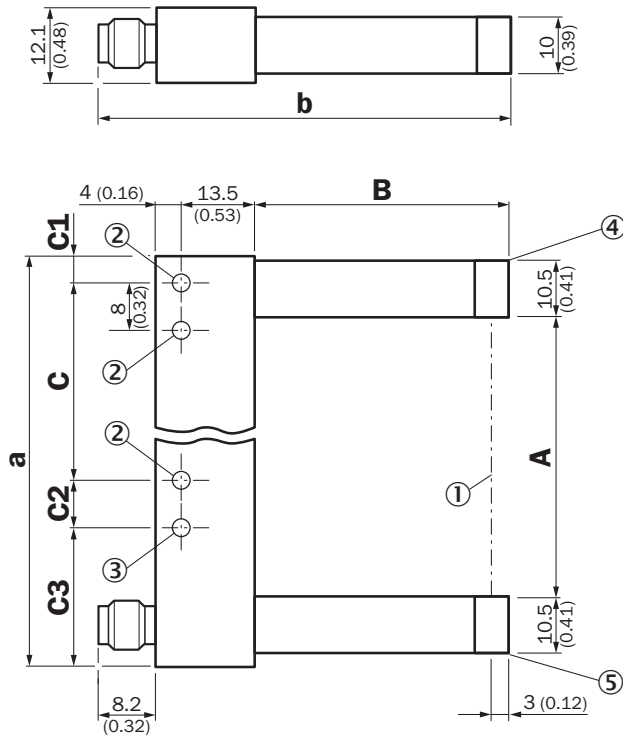

- ① Optical axis
- ② Mounting hole, \varnothing 4.3 mm
- ③ WFM50/80/120/180
- ④ Transmitted light (red)
- ⑤ Function signal indicator (yellow), switching output


Dimensions in mm (inch)

| | A Fork width | B Fork depth | C | C1 |
|---------------|-----------------|-----------------|---------------|---------------|
| WFM30 | 30 (1.18) | 42 (1.65) | 30 (1.18) | 6.5 (0.26) |
| WFM50 | 50 (1.97) | 60 (2.36) | 40 (1.57) | 6.5 (0.26) |
| WFM80 | 80 (3.15) | 60 (2.36) | 70 (2.76) | 6.5 (0.26) |
| WFM120 | 120 (4.72) | 124.3 (4.89) | 100 (3.94) | 17 (0.67) |
| WFM180 | 180 (7.09) | 124.3 (4.89) | 152 (5.98) | 22 (0.87) |

| | C2 | C3 | a | b |
|---------------|--------------|----------------|---------------|-----------------|
| WFM30 | - (-) | - (-) | 54 (2.13) | 67.7 (2.67) |
| WFM50 | 8 (0.31) | 19.5 (0.77) | 74 (2.91) | 85.7 (3.37) |
| WFM80 | 8 (0.31) | 19.5 (0.77) | 104 (4.09) | 85.7 (3.37) |
| WFM120 | 10 (0.39) | 17 (0.67) | 144 (5.67) | 150.2 (5.91) |
| WFM180 | 8 (0.31) | 22 (0.87) | 204 (8.03) | 150.2 (5.91) |





Connection diagram

cd-045



Recommended accessories

Other models and accessories → www.sick.com/WFM

| | Brief description | Type | Part no. |
|---|---|--------------------|----------|
| Plug connectors and cables | | | |
|  | Head A: female connector, M8, 3-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 2 m | YF8U13-020VA1XLEAX | 2095860 |
| | Head A: female connector, M8, 3-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m | YF8U13-050VA1XLEAX | 2095884 |
| | Head A: female connector, M8, 3-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 10 m | YF8U13-100VA1XLEAX | 2095885 |
|  | Head A: female connector, M8, 3-pin, angled, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 2 m | YG8U13-020VA1XLEAX | 2096165 |
| | Head A: female connector, M8, 3-pin, angled, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m | YG8U13-050VA1XLEAX | 2096166 |
| | Head A: female connector, M8, 3-pin, angled, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 10 m | YG8U13-100VA1XLEAX | 2096209 |
|   | Head A: female connector, M8, 3-pin, straight Head B: - Cable: unshielded | DOS-0803-G | 7902077 |
| | Head A: female connector, M8, 3-pin, angled Head B: - Cable: unshielded | DOS-0803-W | 7902078 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com