

SAW Components

Data Sheet B3521





SAW Components B3521
Low Loss Filter 1575,42 MHz

Data Sheet


Features

- RF low-loss filter for remote control application
- Package for **S**urface **M**ounted **T**echnology (**SMT**)
- Hermetically sealed ceramic package
- \blacksquare No matching network required for operation at 50 Ω
- Compliant to EU RoHs Directive (2002/95/EC)
- Lead free soldering compatible with J STD20C

Terminals

■ Ni, gold-plated


Ceramic package DCC6C

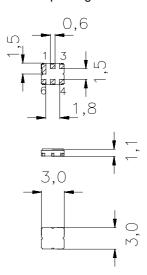

Dimensions in mm, approx. weight 0,037 g

Pin configuration

2	Input		
5	Output		
1, 3, 4, 6	Ground		



Туре	Ordering code	Marking and Package	Packing	
		according to	according to	
B3521	B39162-B3521-U410	C61157-A7-A67	F61074-V8168-Z000	

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	Τ	-40/+85	°C	
Storage temperature range	$T_{\rm stg}$	-45/+90	°C	
DC voltage	$V_{\rm DC}$	0	V	
Source power	P_{S}	10	dBm	source impedance 50 Ω



SAW Components B3521

Low Loss Filter 1575,42 MHz

Data Sheet

Characteristics

Operating temperature range: $T = -40 \dots +85^{\circ} \text{C}$

Terminating source impedance: $Z_{\rm S} = 50~\Omega$ Terminating load impedance: $Z_{\rm L} = 50~\Omega$


		min.	typ.	max.	
Center frequency	$f_{\rm C}$	_	1575,42	_	MHz
Maximum insertion attenuation					
1574,421576,42 MHz		_	3,2	3,5	dB
Amplitude ripple (p-p)	$\Delta \alpha$				
1574,421576,42 MHz		_	0,5	1,0	dB
Input VSWR					
1574,421576,42 MHz Output VSWR			1,9	2,3	
1574,421576,42 MHz		_	1,9	2,3	
Attenuation	α				
850,00 MHz		45	65	_	dB
1500,00 MHz		40	43	_	dB
1535,42 MHz		35	42	_	dB
1615,42 MHz		25	33	_	dB
1640,00 MHz		45	48	_	dB
1700,00 MHz		50	52	_	dB




SAW Components B3521
Low Loss Filter 1575,42 MHz

Data Sheet

Transfer function

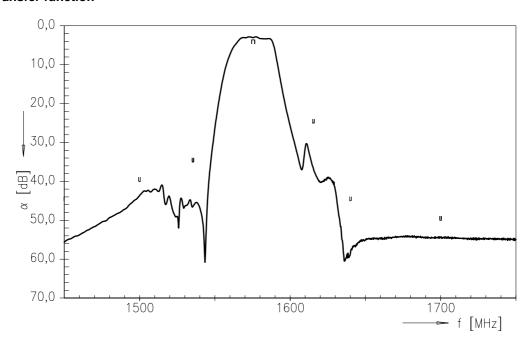

Transfer function (wideband)

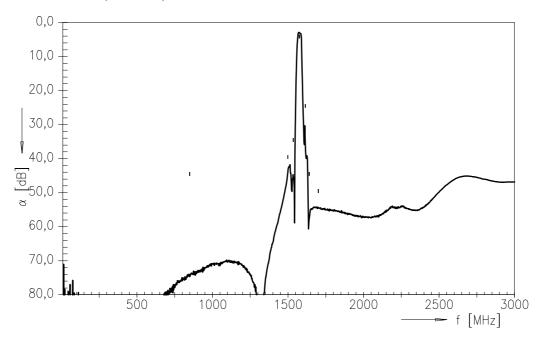





SAW Components B3521
Low Loss Filter 1575,42 MHz

Data Sheet

Input VSWR

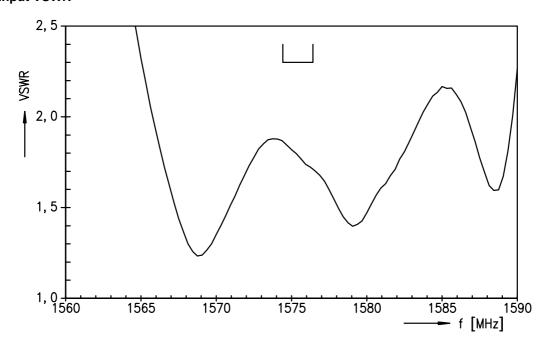

Output VSWR

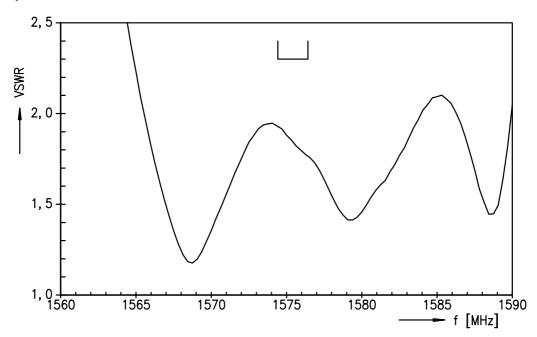



SAW Components B3521

Low Loss Filter 1575,42 MHz

Data Sheet

Published by EPCOS AG Surface Acoustic Wave Components Division, SAW COM AE PD P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.