
UTC DTC143X

NPN DIGITAL TRANSISTOR (BUILT-IN RESISTORS)

FEATURES

- * Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see the equivalent circuit).
- * The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- * Only the on/off conditions need to be set for operation, making device design easy.

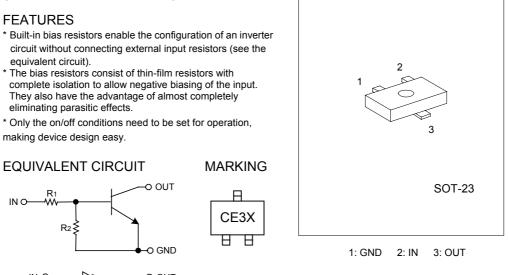

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

MEGGEOTE MINORIMONITO THE) (1a 20 c)		
PARAMETER	SYMBOL	RATINGS	UNIT
Supply voltage	Vcc	-50	V
Input voltage	Vin	-7 ∼ + 20	V
Output current	lo	100	mA
	IC (Max.)	100	IIIA
Power Dissipation	PD	200	mW
Junction temperature	Tj	150	$^{\circ}$
Storage temperature	Tstg	-55 ~ +150	$^{\circ}\mathbb{C}$

ELECTRICAL CHARACTERISTICS (Ta = 25°C)


2220111012 011/11/10120 (1a - 250)								
PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT		
Input voltage	VI (off)	Vcc=5V, Io=100 μ A			0.3	V		
	VI (on)	Vo=0.3V, Io=20mA	2.5			V		
Output voltage	VO (on)	Io/I:=10mA/0.5mA		0.1	0.3	V		
Input current	lı	Vi=5V			1.8	mA		
Output current	IO (off)	Vcc=50V, Vi=0V			0.5	μA		
DC current gain	Gı	Vo=5V, Io=10mA	30					
Input resistance	R1		3.29	4.7	6.11	ΚΩ		
Resistance ratio	R ₂ /R ₁		1.7	2.1	2.6			
Transition frequency	f⊤	Vce=10V, Ie=-5mA, f=100MHz *		250		MHz		


^{*} Transition frequency of the device





UTC UNISONIC TECHNOLOGIES CO. LTD

ELECTRICAL CHARACTERISTIC CURVES




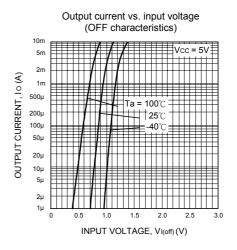





Output voltage vs. output current



UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

UNISONIC TECHNOLOGIES CO. LTD