

**Descriptions**

- General purpose application
- Switching application

**Features**


- Large collector current
- Low collector saturation voltage
- Complementary pair with STN2222AS

**Ordering Information**

Type NO.	Marking	Package Code
STN2907AS	WA	SOT-23

**Outline Dimensions**

**unit : mm**

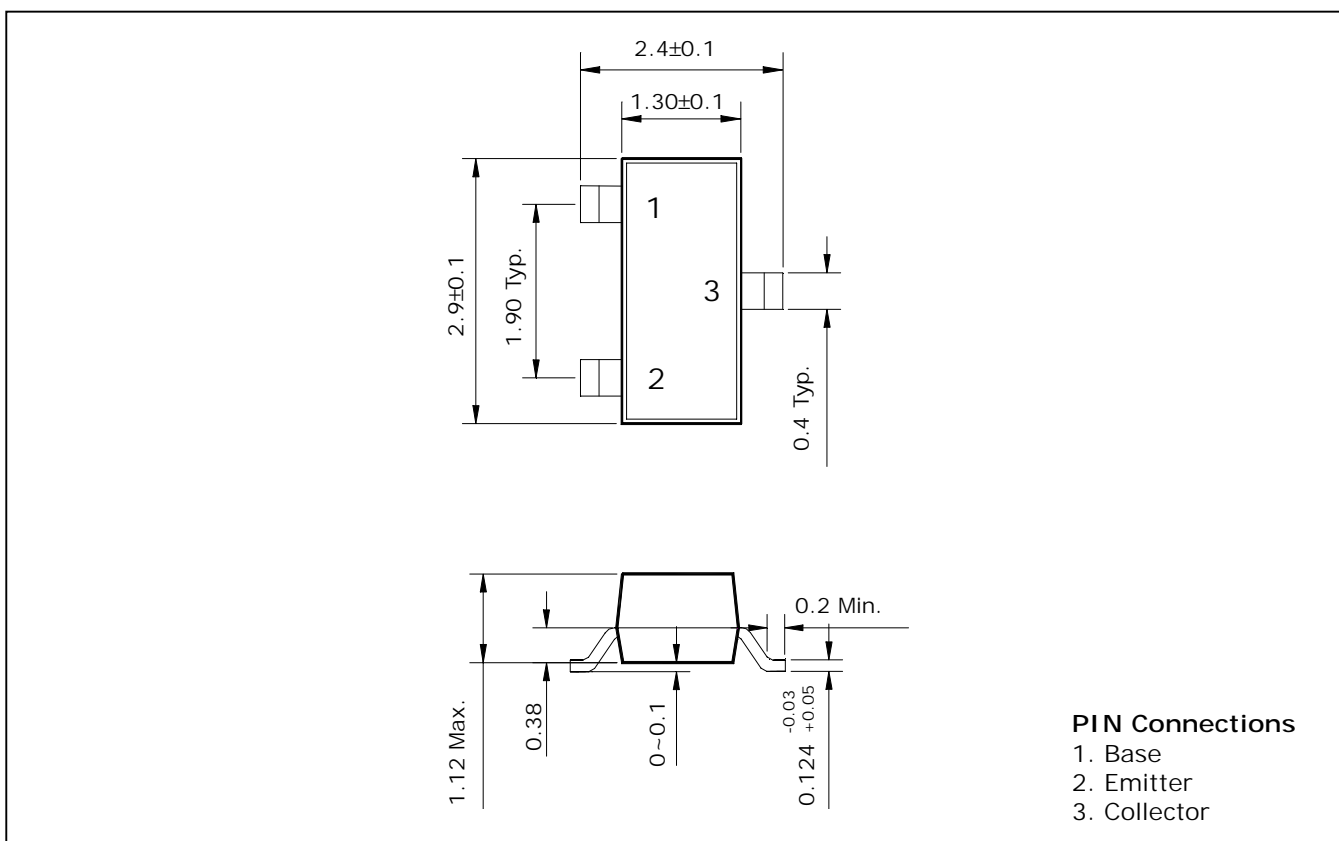

## Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	$V_{CBO}$	-60	V
Collector-Emitter voltage	$V_{CEO}$	-50	V
Emitter-Base voltage	$V_{EBO}$	-5	V
Collector current	$I_C$	-600	mA
Collector dissipation	$P_C^*$	350	mW
Junction temperature	$T_J$	150	°C
Storage temperature	$T_{stg}$	-55 ~ 150	°C

\* : Package mounted on 99.5% Alumina 10×8×0.1mm.


## Electrical Characteristics

(Ta=25°C)


Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	$BV_{CBO}$	$I_C = -10\mu A, I_E = 0$	-60	-	-	V
Collector-Emitter breakdown voltage	$BV_{CEO}$	$I_C = -10mA, I_B = 0$	-50	-	-	V
Emitter-Base breakdown voltage	$BV_{EBO}$	$I_E = -10\mu A, I_C = 0$	-5	-	-	V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -60V, I_E = 0$	-	-	-10	nA
DC current gain	$h_{FE}$	$V_{CE} = -10V, I_C = -10mA$	75	-	-	-
Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C = -150mA, I_B = -15mA$	-	-	-0.4	V
Transition frequency	$f_T$	$V_{CE} = -20V, I_C = -20mA$	250	-	-	MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	6.0	-	pF

## Electrical Characteristic Curves


**Fig. 1  $P_C - T_a$**

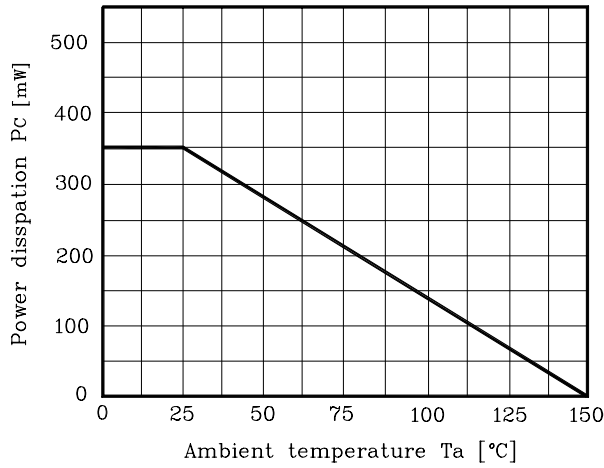


**Fig. 2  $I_C - V_{BE}$**

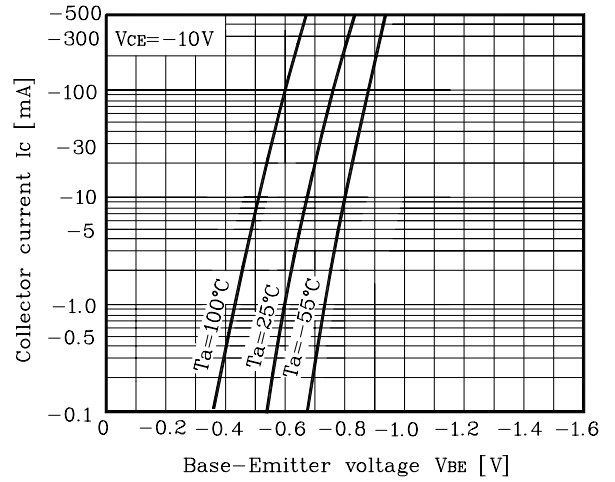


**Fig. 3  $I_C - V_{CE}$**

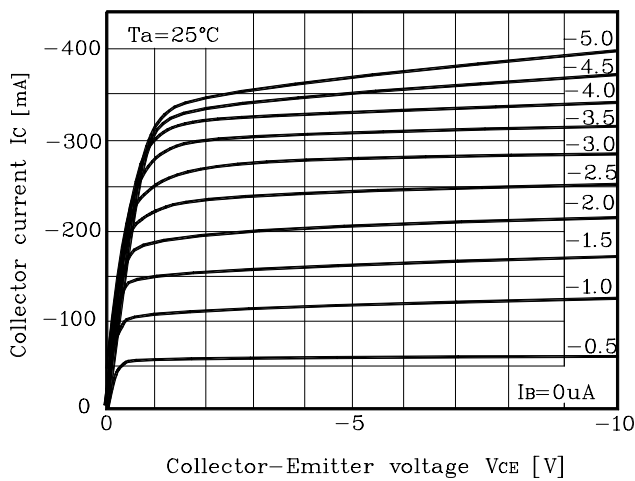

**Fig. 4  $V_{CE(sat)} - I_C$**

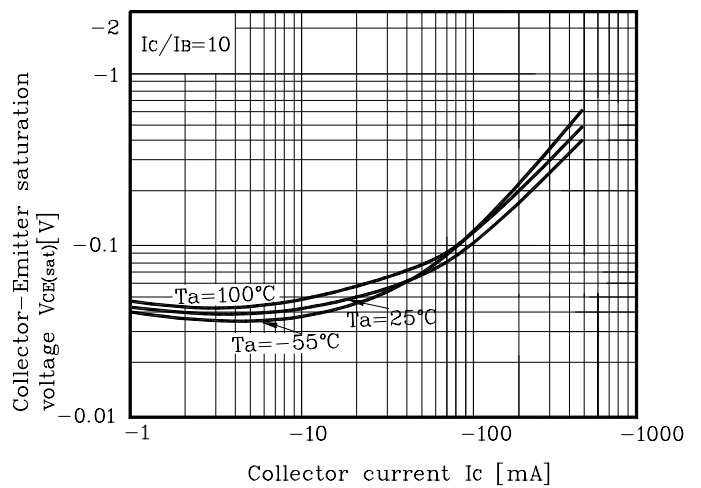

**Fig. 5  $h_{FE} - I_C$**

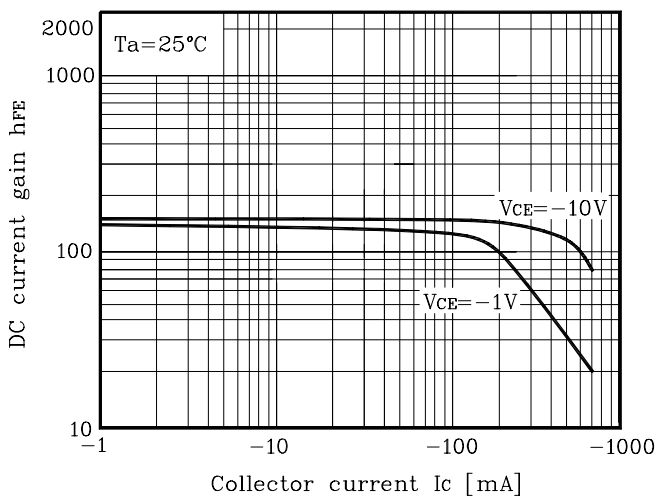

**Fig. 6  $h_{FE} - I_C$**

