


**Surface Mount Switching Diode**

**(Pb)** Lead(Pb)-Free

**Features:**


- \*Surface Mount Package Ideally Suited for Automatic Insertion
- \*Fast Switching Speed
- \*Very Low Leakage Current

**SWITCHING DIODE**
**160m AMPERES**
**75 VOLTS**

**SOT-23**
**Mechanical Data:**

- \*Case: SOT-23, Molded Plastic
- \*Terminals: Solderable per MIL-STD-202, Method 208
- \*Polarity: See diagram
- \*Weight: 0.008 grams

**SOT-23 Outline Dimensions**

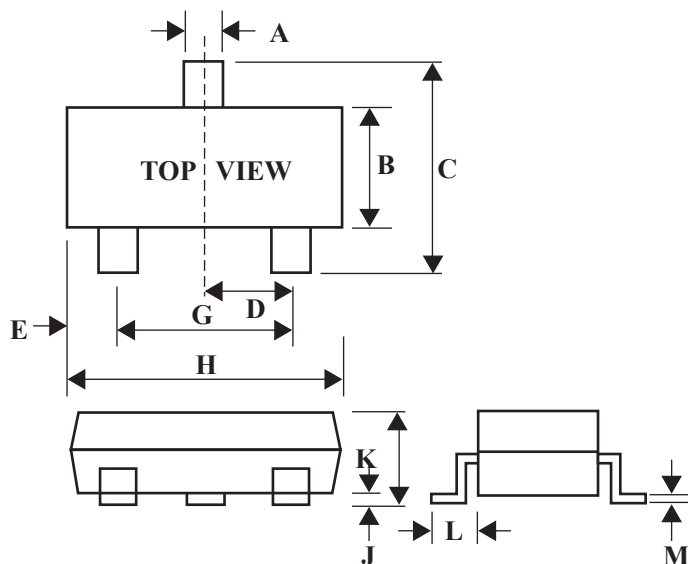Unit:mm



Dim	Min	Max
A	0.35	0.51
B	1.19	1.40
C	2.10	3.00
D	0.85	1.05
E	0.46	1.00
G	1.70	2.10
H	2.70	3.10
J	0.01	0.13
K	0.89	1.10
L	0.30	0.61
M	0.076	0.25

## Maximum Ratings

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	$V_{RM}$	100	V
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	75	V
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Forward Continuous Current <sup>(1)</sup> Single Diode Double Diode	$I_{FM}$	160 140	mA
Non-Repetitive Peak Forward @ $t=1.0ms$ Surge Current @ $t=1.0s$	$I_{FSM}$	1.0 0.5	A
Power Dissipation	$P_D$	225	mW
Thermal Resistance Junction to Ambient Air <sup>(1)</sup>	$R_{\theta JA}$	556	°C/W
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to + 150	°C

## Electrical Characteristics ( $T_A=25^\circ C$ Unless Otherwise Note) (Each Diode)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

## Off Characteristics

Reverse Breakdown Voltage $I_R = 100\mu A$	$V_{BR}$	75	-	V
Reverse Voltage Leakage Current $V_R=70V$	$I_R$	-	5	nA
Diode Capacitance ( $V_R = 0V, f = 1.0 MHz$ )	$C_D$	-	2.0	pF
Forward Voltage $I_F = 1 mA$ $I_F = 10 mA$ $I_F = 50 mA$ $I_F = 150 mA$	$V_F$	- - - -	0.9 1.0 1.1 1.25	V
Reverse Recovery Time $I_F = I_R = 10mA, I_{rr} = 0.1 \times I_R, R_L=100\Omega$	$t_{rr}$	-	3	$\mu s$

Note:

1. Part mounted on FR-4 board with recommended pad layout.

## Device Marking

Item	Marking	Equivalent Circuit diagram
BAV199	JY	

## Characteristics Curve

