
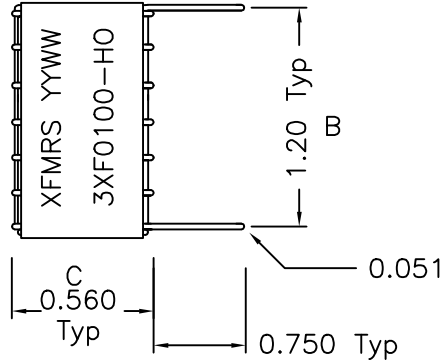



**1. Mechanical Dimensions:**



**WINDING DETAIL:**

STRIP AND TIN TO MOUNT PLAIN  
VARNISH REQUIRED

**2. Schematic:**



**3. Electrical Specifications: @25°C**

OCL: 100uH±10% @1.0KHz 1.0V

Current Rating: 5.0ADC

DC Resistance: 0.030 Ohms Maximum

**Note:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV: A/1

<b>XFMRS Inc</b>		Title: HORIZONTAL OPEN TOROID		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: 3XF0100-HO		REV. A	
	DWN.	李小锋	Jun-07-01	
	CHK.	廖玉坤	Jun-07-01	
	APP.	BW	Jun-07-01	