



1. Mechanical Dimensions:

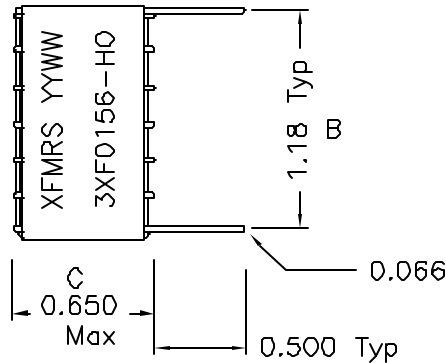

Lead Tinned to 1/16" of Body

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 15uH±15% @1.0KHz 1.0V, 0Adc

OCL: 8.07uH Min @1.0KHz 1.0V, 18.0Adc

DCR: 0.006 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202B, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/2

XFMRs Inc www.XFMRs.com		Title: HORIZONTAL OPEN TOROID	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: 3XF0156-H0		REV. A
	DWN.	Xiany	Aug-27-08
SHEET 1 OF 1	CHK.	YK Liao	Aug-27-08
	APP.	Joe Huff	Aug-27-08