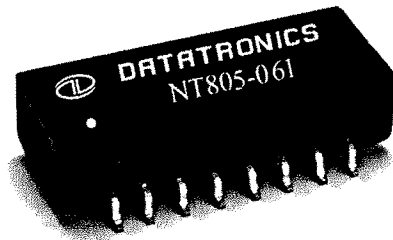
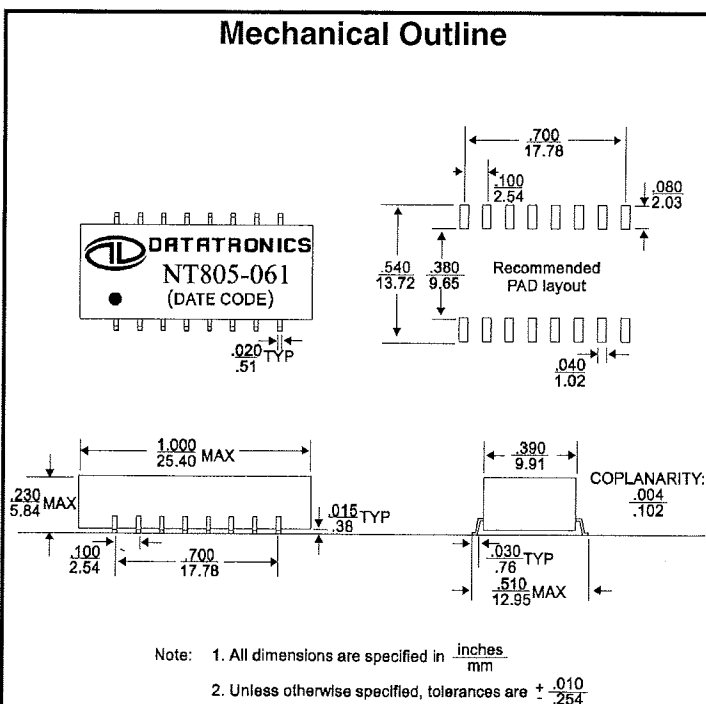


NT805-061 High Speed LAN Magnetics Module
Features

- Designed for 155MB/s transmission over UTP category 5 cable
- Designed for ATM, 100Base-TX and TP-FDDI applications
- Integrated module for multiport concentrators and adapter card applications
- Low common mode noise emissions
- SMD package
- Pick and place compatible
- Designed to withstand IR reflow soldering
- Supports NSC DP83223, Micro Linear ML6673, ML6674 and other 100Base-TX transceiver chips


Electrical Specifications @25°C

Insertion loss (dB Max)	Rise Time (ns Typ)	Return loss (dB Typ)				Differential to Common Mode Rejection (dB Min)				Crosstalk (dB Min)		Isolation (Vrms)
		.1 - 60MHz		60 - 100MHz		.1 - 60MHz		60 - 100MHz		.1 - 60MHz	60 - 100MHz	
TX / RX	TX / RX	TX	RX	TX	RX	TX	RX	TX	RX	TX <=> RX	TX <=> RX	TX / RX
1.1	2.5	15	17	11	15	45	40	40	35	40	38	1500

Mechanical Outline

Schematic
