

POWERLINE - DC/DC-Converter

AW-Series, 5W, 1.6 kV Isolation, Regulated, 4:1 Wide Input Range (Single & Dual Output)

RECOM

Features


- 5 Watts Regulated Output Power
- 4:1 Wide Input Voltage Range
- Five-Sided Shield
- Standard 24 Pin DIP & SMD Type Package
- High Efficiency up to 82%
- UL 1950 Component Recognised
- International Safety Standard Approvals



Selection Guide 24V and 48V Input Types

art Number	SMD Suffix	Input Range	Output Voltage	Output Current	Input Current (see note 4)	Efficiency (see note 5)	Capacitive Load max. μ F
DIP		VDC	VDC	mA	mA	%	μ F
RP05-243.3SAW	(SMD)	9-36	3.3	1000	191	76	2200
RP05-2405SAW	(SMD)	9-36	5	1000	285	77	1000
RP05-2412SAW	(SMD)	9-36	12	470	309	80	220
RP05-2415SAW	(SMD)	9-36	15	400	329	80	150
RP05-2405DAW	(SMD)	9-36	\pm 5	\pm 500	282	78	\pm 680
RP05-2412DAW	(SMD)	9-36	\pm 12	\pm 230	295	82	\pm 100
RP05-2415DAW	(SMD)	9-36	\pm 15	\pm 190	313	80	\pm 68
RP05-483.3SAW	(SMD)	18-75	3.3	1000	100	73	2200
RP05-4805SAW	(SMD)	18-75	5	1000	145	76	1000
RP05-4812SAW	((SMD)	18-75	12	470	155	80	220
RP05-4815SAW	(SMD)	18-75	15	400	167	79	150
RP05-4805DAW	(SMD)	18-75	\pm 5	\pm 500	145	76	\pm 680
RP05-4812DAW	(SMD)	18-75	\pm 12	\pm 230	151	80	\pm 100
RP05-4815DAW	(SMD)	18-75	\pm 15	\pm 190	159	79	\pm 68

RP05-4805SAW: Derating Curve

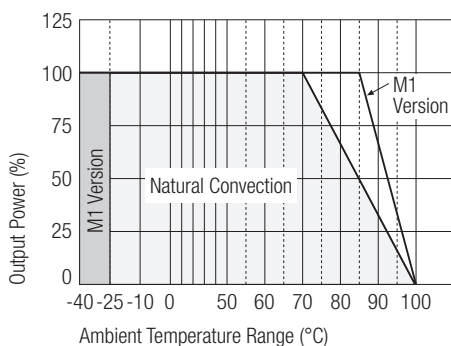

POWERLINE - DC/DC-Converter

AW-Series, 5W, 1.6 kV Isolation, Regulated, 4:1 Wide Input Range (Single & Dual Output)

RECOM

Specifications (typical at nominal input and 25°C unless otherwise noted)

Output Power			5W max.
Voltage Accuracy (full Load and nominal Vin)			±2%
Minimum Load (see note 1)			10% of FL
Line Regulation (LL-HL at full load)			±0.2%
Load Regulation (25% to 100% FL)	Single		±0.5%
	Dual		±1%
Cross Regulation (asymmetrical load 25%/100% FL)			±5%
Ripple and Noise (20MHz bandwidth)			50mVp-p
Temperature Coefficient			±0.02%/°C, max.
Transient Response (25% load step change)			200µsec
Over Load Protection (% of full load at nominal Vin)			170% typ.
Short Circuit Protection			Continuous, automatic recovery
Input Voltage Range	RP05	24V nominal input	9-36VDC
	RP05	48V nominal input	18-75VDC
Input Filter			Pi Type
Input Surge Voltage (100 ms max.)	24V Input		50VDC
	48V Input		100VDC
Input Reflected Ripple (nominal Vin and full load)			20mA _{p-p}
Start Up Time (nominal Vin and constant resistor load)			600ms typ.
Efficiency			see „Selection Guide“ table
Isolation Voltage	In to out		1600VDC min.
	I/O to case		DIP type 1600VDC min.
	I/O to case		SMD type 1000VDC min.
Isolation Resistance			10 ⁹ Ω min.
Isolation Capacitance			300pF max.
Switching Frequency			300kHz typ.
Approved to Safety Standards			UL 1950, EN60950
Case Material			Nickel-coated copper
Base Material			Non-conducted black plastic
Potting Material			Epoxy (UL94-V0)
Weight	DIP		16g
	SMD		18g
Dimensions			See „Package Style and Pinning“ on next page
MTBF (see note 2)			3.165 x 10 ⁶ Hours
Operating Temperature Range	Standard		-25°C to +85°C (with derating)
	M1 (see note 3)		-40°C to +85°C (non-derating)
	M2 (W series)		-40°C to +85°C (with derating)
Maximum Case Temperature			+100°C
Storage Temperature Range			-55°C to +105°C

continued on next page

POWERLINE - DC/DC-Converter

AW-Series, 5W, 1.6 kV Isolation, Regulated, 4:1 Wide Input Range (Single & Dual Output)

RECOM


Specifications continued (typical at nominal input and 25°C unless otherwise noted)

Thermal Impedance	Natural convection	20°C/Watt
Thermal Shock		MIL-STD-810D
Vibration		10-55Hz, 2G, 3 Min. Period, 30 Min. along X, Y and Z
Relative Humidity		5% to 95% RH
Conducted Emissions	EN55022	Level A
Radiated Emissions	EN55022	Level A
Conducted Immunity	EN61000-4-6	Perf. Criteria 2
Radiated Immunity	EN61000-4-3	Perf. Criteria 2
Fast Transient	EN61000-4-4	Perf. Criteria 2
ESD	EN61000-4-2	Perf. Criteria 2

Notes


1. The RP05 AW- series requires a minimum of 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
2. BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40 °C (Ground fixed and controlled environment).
3. M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than the standard and the M2 version.
4. Maximum value at nominal input voltage and full load of standard type.
5. Typical value at nominal input voltage and full load.
6. There is no pin at pin 10 & pin 15 for the RP05-W series.

Package Style and Pinning (mm)

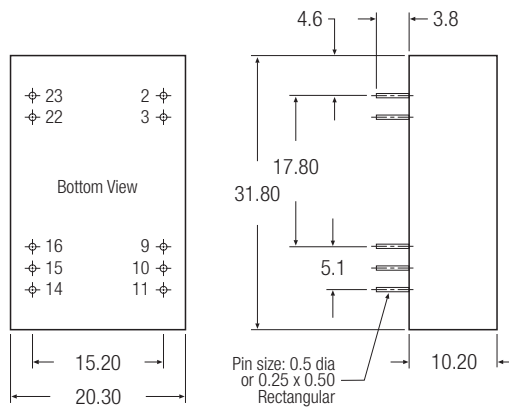

DIP Pin Connections

Pin #	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	NC (see note 6)	NC (see note 6)
11	NC	-Vout
14	+Vout	+Vout
15	NC (see note 6)	NC (see note 6)
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

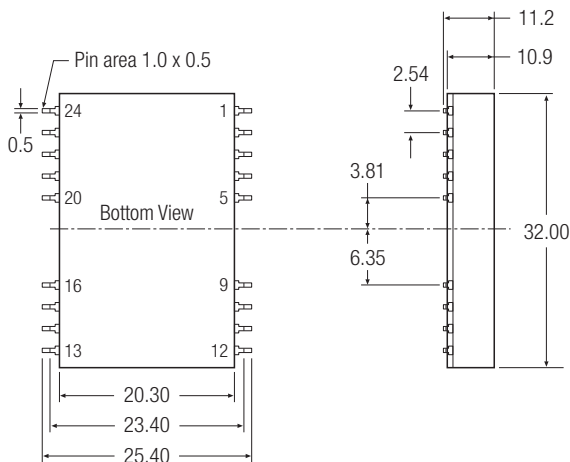

SMD Pin Connections

Pin #	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	NC	Common
10	NC	NC
11	NC	-Vout
14	+Vout	+Vout
15	NC	NC
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin
Others	NC	NC

Pin Pitch Tolerance ± 0.35 mm