


Precision Thin Film Chip Resistors

PFC Series

- Standard 60/40 Sn/Pb and Pb-free (RoHS compliant) terminations available
- Available in 0603, 0805, 1206, 1505, 2010 and 2512 chip sizes
- Tested for COTS applications
- Absolute TCR to $\pm 10\text{ppm}/^\circ\text{C}$
- Mil screening available

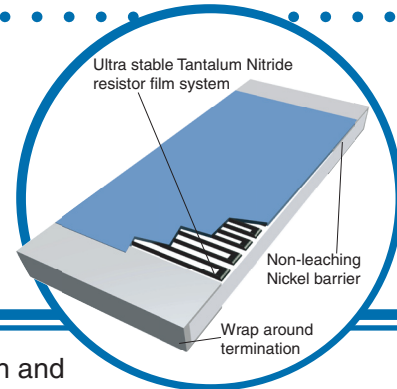

The IRC TaNFilm® PFC chip resistor series provides the high precision and ultra stable performance of our Tantalum Nitride resistive film system in 0603, 0805, 1206, 1505, 2010 and 2512 sizes. The unique characteristics of the passivated Tantalum Nitride film insure long term life stability and stability in moist environments.

Using the same manufacturing line as the PFC Military Series, IRC's precision chips maintain the same superior environmental performance. Specially selected materials and processes insure initial precision is maintained in the harshest surface mount soldering environment. Wrap-around terminations with leach-resistant nickel barriers insure high integrity solder connections.

Electrical Data

| Model | Power Rating (70°C) | Max Voltage Rating ($\leq \sqrt{P \times R}$) | Temperature Range | ESD Sensitivity | Noise | Termination | Substrate |
|-------|---------------------|---|-------------------|------------------|--------|---|---------------|
| W0603 | 100mW | 75V | -55°C to +150°C | 2KV to 4KV (HBM) | <-25dB | 60/40 Sn/Pb or 100% tin (RoHS compliant) plated over nickel barrier | 99.5% Alumina |
| W0805 | 250mW | 100V | | | | | |
| W1206 | 333mW | 200V | | | | | |
| W1505 | 350mW | 100V | | | | | |
| W2010 | 800mW | 175V | | | | | |
| W2512 | 1.0W | 200V | | | | | |

Environmental Data


| Environmental Test MIL-PRF-55342 | Maximum ΔR per Characteristic E | Performance | |
|----------------------------------|---|--------------|--------------|
| | | Typical | Maximum |
| Thermal Shock | $\pm 0.10\%$ | $\pm 0.02\%$ | $\pm 0.10\%$ |
| Low Temperature Operation | $\pm 0.10\%$ | $\pm 0.01\%$ | $\pm 0.05\%$ |
| Short Time Overload | $\pm 0.10\%$ | $\pm 0.01\%$ | $\pm 0.05\%$ |
| High Temperature Exposure | $\pm 0.10\%$ | $\pm 0.03\%$ | $\pm 0.10\%$ |
| Effects of Solder | $\pm 0.20\%$ | $\pm 0.01\%$ | $\pm 0.10\%$ |
| Moisture Resistance | $\pm 0.20\%$ | $\pm 0.03\%$ | $\pm 0.10\%$ |
| Life | $\pm 0.50\%$ | $\pm 0.03\%$ | $\pm 0.10\%$ |

General Note


IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

Precision Thin Film Chip Resistors

Power Derating Curve

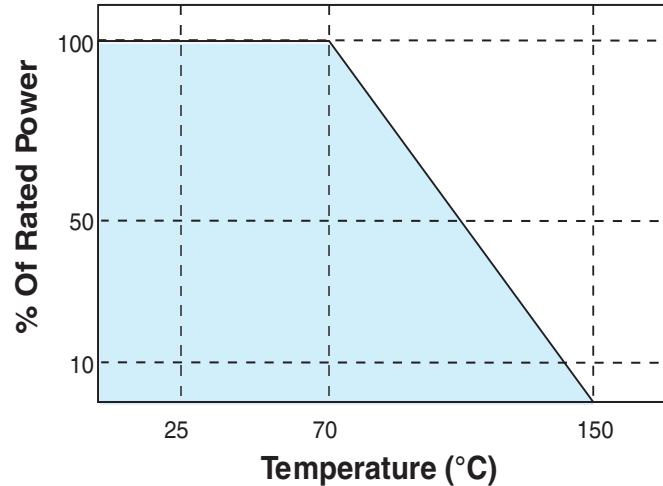


Manufacturing Capabilities Data (Commercial Product Only)

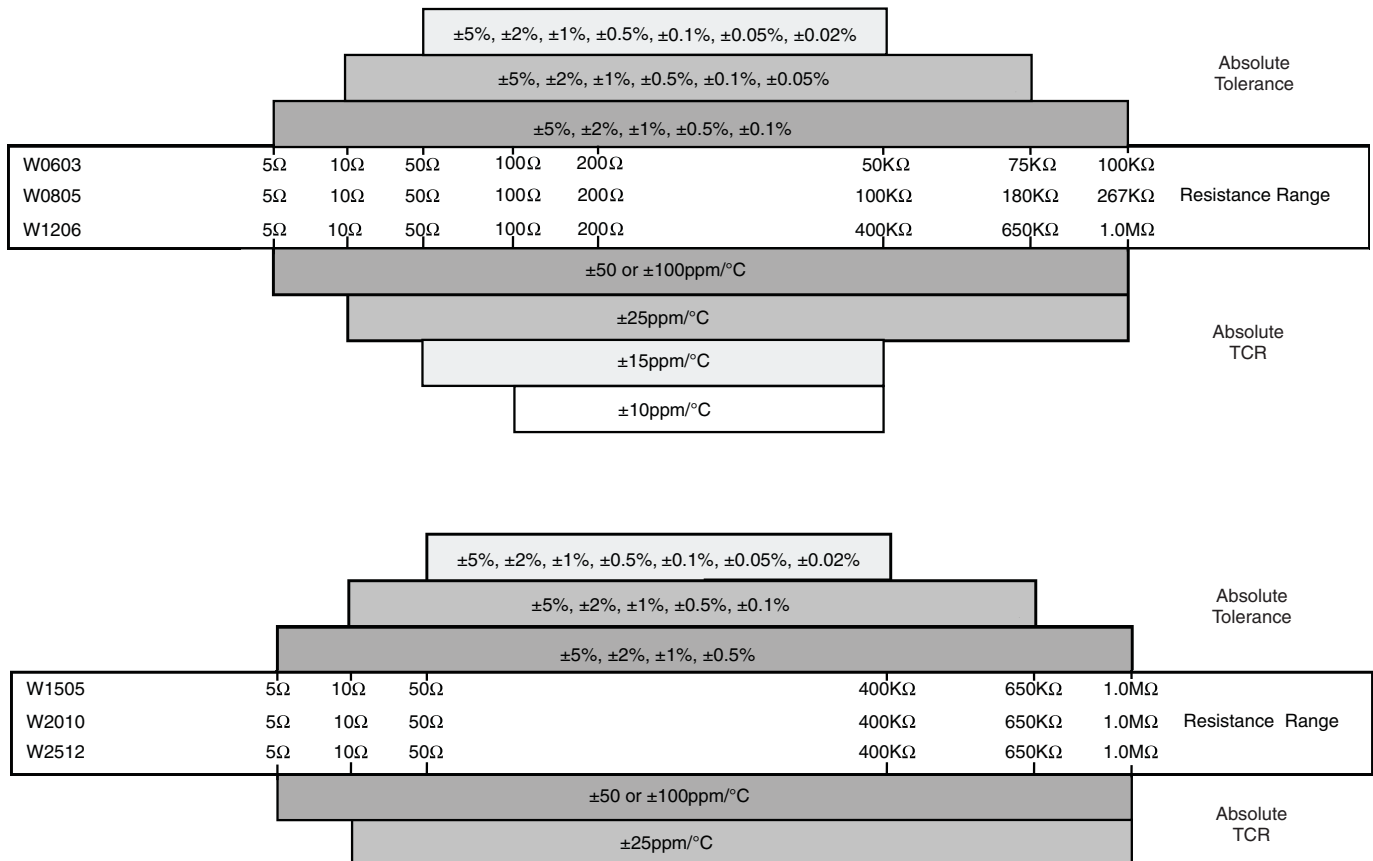


Precision Thin Film Chip Resistors

Manufacturing Capabilities Data (MIL Screened Only)

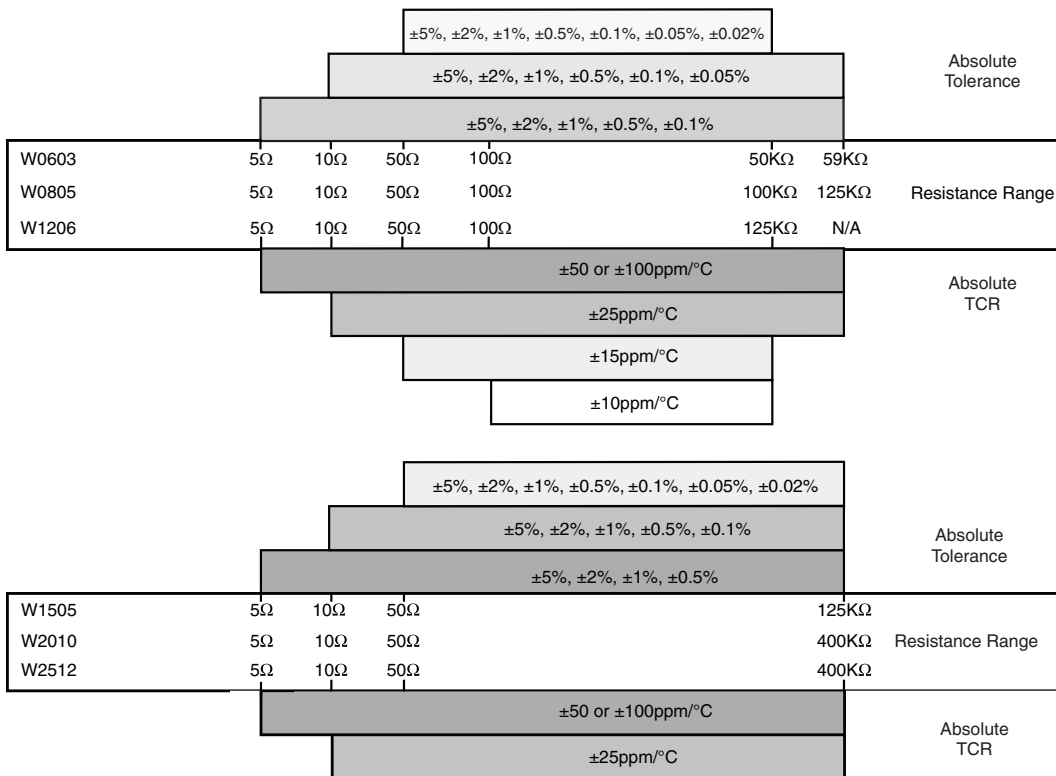

Physical Data

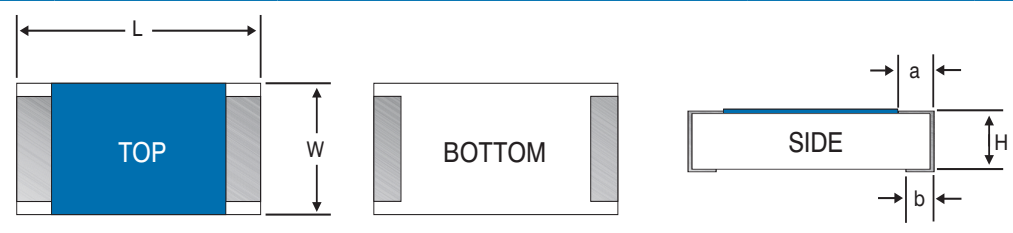

| | L | W | H | a | b |
|--------------|---------------|---------------|---------------|---------------|---------------|
| W0603 | 0.063" ±0.004 | 0.031" ±0.004 | 0.020" ±0.004 | 0.012" ±0.005 | 0.015" ±0.005 |
| W0805 | 0.081" ±0.005 | 0.050" ±0.005 | 0.020" ±0.006 | 0.015" ±0.008 | 0.016" ±0.008 |
| W1206 | 0.126" ±0.006 | 0.063" ±0.005 | 0.024" ±0.004 | 0.025" ±0.010 | 0.025" ±0.010 |
| W1505 | 0.155" ±0.007 | 0.050" ±0.005 | 0.024" ±0.004 | 0.020" ±0.010 | 0.020" ±0.010 |
| W2010 | 0.203" ±0.007 | 0.103" ±0.005 | 0.024" ±0.004 | 0.020" ±0.008 | 0.020" ±0.008 |
| W2512 | 0.255" ±0.007 | 0.124" ±0.005 | 0.024" ±0.004 | 0.020" ±0.008 | 0.020" ±0.008 |


Precision Thin Film Chip Resistors



Mil Screened Precision Chip Resistors


IRC's PFC chip resistors are available with Mil screening. These chips are manufactured on the same production line as our Mil-qualified chip resistors and screened in accordance with MIL-PRF-55342. These chips are identified with IRC's ordering information and not with Mil marking.

Commercial Ordering Data

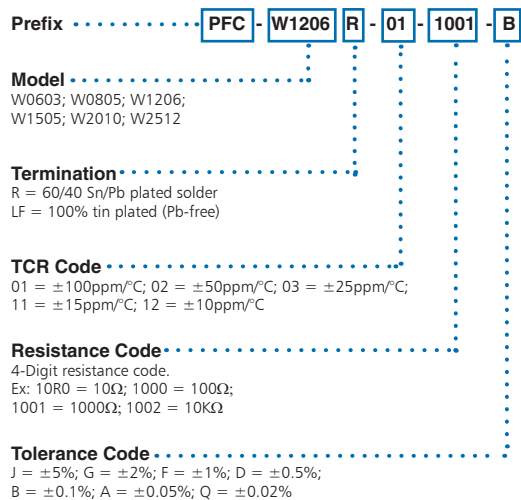

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

Mil Screened Ordering Data*

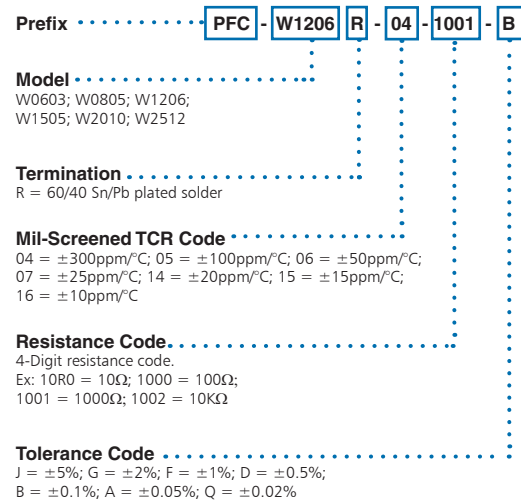

*Please refer to our PFC Military datasheet to order parts qualified to MIL-PRF-55342.