




**PP312-W
PP3122-W
PP3126-W**

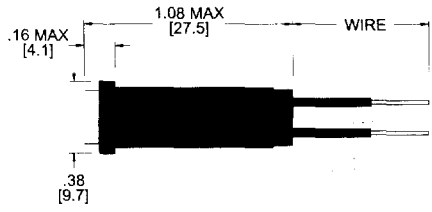


**PPM312-W
PPM3122-W
PPM3126-W**

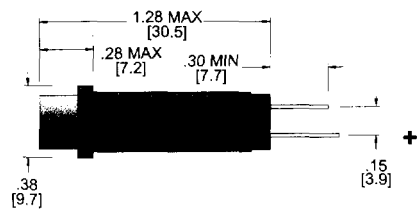


**PP312-T
PP3122-T
PP3126-T**

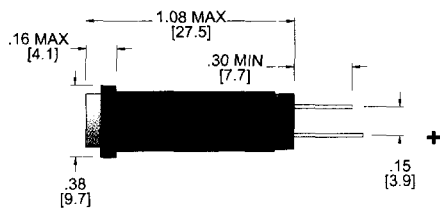


**PPM312-T
PPM3122-T
PPM3126-T**

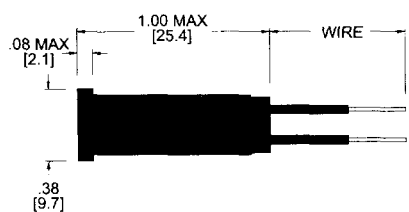


**PPS312-W
PPS3122-W
PPS3126-W**

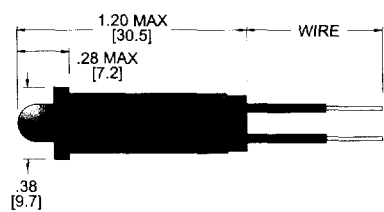

**PPD312-W
PPD3122-W
PPD3126-W**

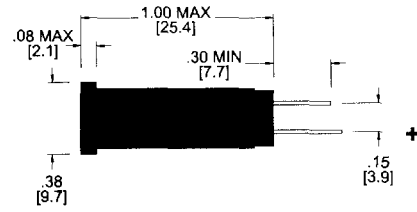


**PPS312-T
PPS3122-T
PPS3126-T**

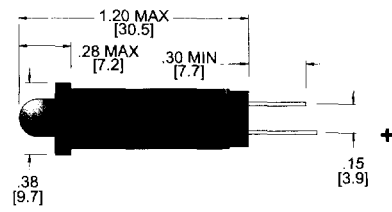


**PPD312-T
PPD3122-T
PPD3126-T**


OPTIONAL MOUNTING HARDWARE



PART NUMBER SELECTION GUIDE

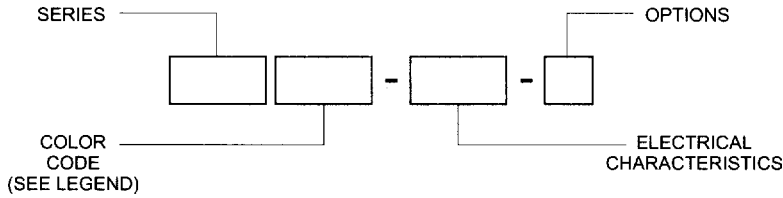

COLOR CODE LEGEND

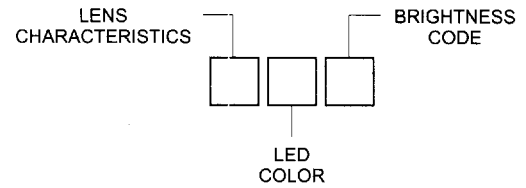

STANDARD	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS		OPTIONS
	SINGLE CHIP PP312 PPS312	CR5 CY5 CG5	VDC 2Vf 6V 14V 28V	VAC 120VAC	T - WIRE TERMINAL W6 - 6" WIRE

LENS CHARACTERISTICS	LED COLOR	BRIGHTNESS CODE
C-CLEAR CW - CLEAR WATER	R-RED Y-YELLOW G-GREEN B-BLUE O-ORANGE LW-LIME WHITE W-WHITE RG-RED/GREEN YG-YELLOW/GREEN	4-STANDARD 5-STANDARD 6-HIGH INTENSITY 7-HIGH INTENSITY 900-HIGH INTENSITY 3K-HIGH INTENSITY N-NEON

CUSTOM	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS		OPTIONS
	SINGLE CHIP PP312 PPM312 PPS312 PPD312	CR900 CY3K CG6 CO5 CB5 CWRG4 - BICOLOR CWYG4 - BICOLOR	VDC 5V 12V 24V 36V 60V	VAC 5VAC 6VAC 12VAC 14VAC 24VAC 28VAC 36VAC 48VAC 60VAC	W12 - 12" WIRE W18 - 18" WIRE W24 - 24" WIRE
	DUAL CHIP PP3122 PPM3122 PPS3122 PPD3122	CR3K CR5 CY3K CY5 CG5 CO5 CB5			
	6 MULTICHIP PP3126 PPM3126 PPS3126 PPD3126	CR7 CLW6 CR6 CW6 CY3K CY6 CG6 CO6 CB6			
	NEONS PP312	CRN CON CAN CGN CBN CWN TWN	VAC 120VAC 220VAC		

PART SPECIFICATIONS

- PART NUMBERS CONSISTING OF OPTIONS NOT FOUND IN THE STANDARD BOX ARE CUSTOM.
- FOR COMPLETE PART NUMBER SELECT ONE OPTION FROM EACH OF THE FOUR COLUMNS FROM LEFT TO RIGHT.
- BRIGHTNESS CODES LISTED ARE SET BY THE FACTORY FOR ALL COLORS. THE ABOVE CHART IS FOR REFERENCE ONLY.
- MOUNTING DIAMETER 0.310 (7.9mm) TO 0.312 (8.0mm).
- PANEL THICKNESSES FROM 0.031 (0.8mm) TO 0.500 (12.7mm).
- HOUSING MATERIAL IS BLACK NYLON UL 94V-2.
- WIRE LEADS ARE RED FOR ANODE AND BLACK FOR CATHODE.
- TERMINALS ARE 0.020 (0.5mm) SQUARE.