

155 Mbps PIN-TIA (1310nm) 5V


Features

- ˆ 155 Mbps typical bandwidth.
- ˆ InGaAs/InP PIN Detector with transimpedance amplifier in a TO-46 hermetic package.
- ˆ High sensitivity with AGC.
- ˆ Differential ended output
- ˆ Single +5V operation.

Applications

◆ Optical Communication Receiver / Transceiver

- SONET OC-3/SDH STM-1
- Fast Ethernet
- Fiber Channel

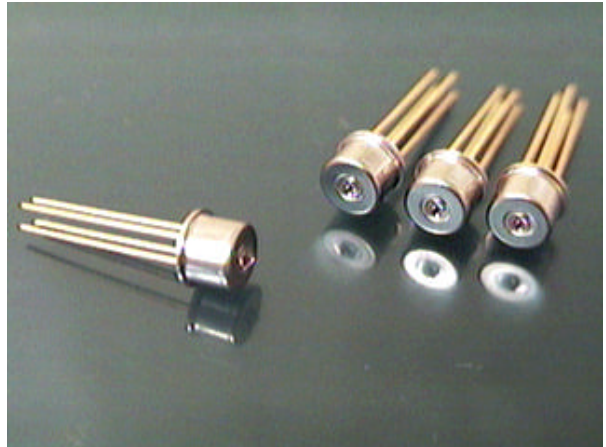

Handling and Safety Precautions

Anti-static protection, such as ionized air blowers or grounded wrist straps with a 1 mega series resistor, should be used at all times when handling laser diodes. In addition, soldering irons should be well grounded.

Overheating caused by soldering of the leads of a laser diode must be prevented. Recommend soldering iron temperature and maximum exposure time are below 260°C and 10 seconds.

Description

The MCD-3T4C-002 is a high performance 1310 nm InGaAs/InP PIN detector with transimpedance-amplifier .This product is designed for short and medium distance optical fiber communication.

The MCD-3T4C-002 is compatible with industry standard wave or hand solder processes.

· Absolute Maximum Ratings (Tc = 25 °C)


Parameter	Symbol	Rated Value	Unit
Voltage	V	6	V
Operating case temperature	T _{op}	- 40 to +85	°C
Storage temperature	T _{STG}	- 40 to +85	°C

· DC/ Electrical Characteristics (Tc = 25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply power	V _{cc}	4.5	5	5.5	V
Differential Output Voltage	V _d	-	1	-	V
Supply current (no load)	I _{cc}	-	-	35	mA


· AC/ Optical & Electrical Characteristics (Tc = 25 °C)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Detection Range			1100	1310	1650	nm
Active Area			-	75	-	µm
Gain@10Mbps Differential	G	λ=1300nm	0.17	-	220	V/mW
Bandwidth	BW	P _f =1W	120	140	-	MHz
Saturation Power	Psat	λ=1300nm	-3	0	-	dBm
Sensitivity	Sens	BER=10 ⁻¹⁰ @155Mbps	-	-39	-36	dBm
Output Resistance	R _{out}		-	50	65	ohm
Operation Speed			-	155	-	Mbps

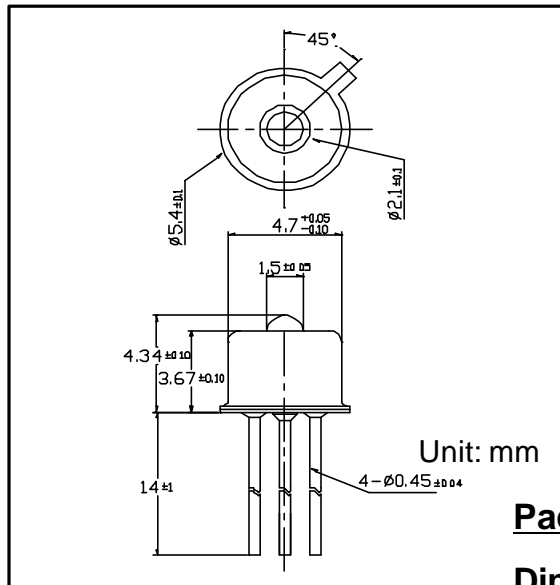

Package

Dimensions

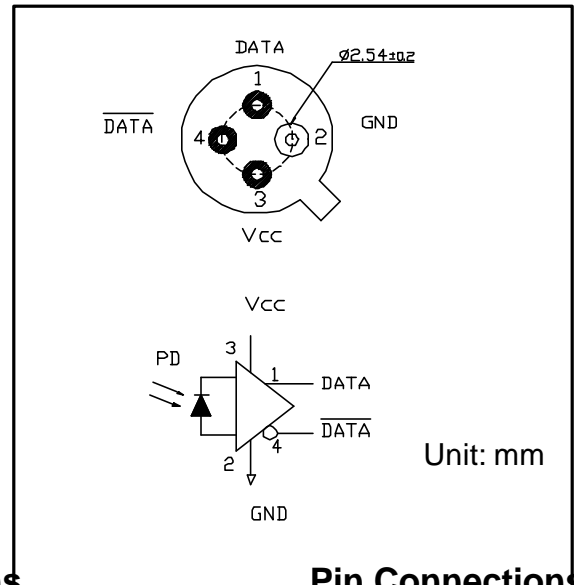

Pin Connections

(Bottom View)

NOTE: Specifications are subjected to change without notice.