



# SOLID TANTALUM ELECTROLYTIC CAPACITORS

# F97

Resin-molded Chip,  
High Reliability  
(High temperature /  
moisture resistance) Series




- Compliant to the RoHS directive (2002/95/EC).
- Compliant to AEC-Q200.

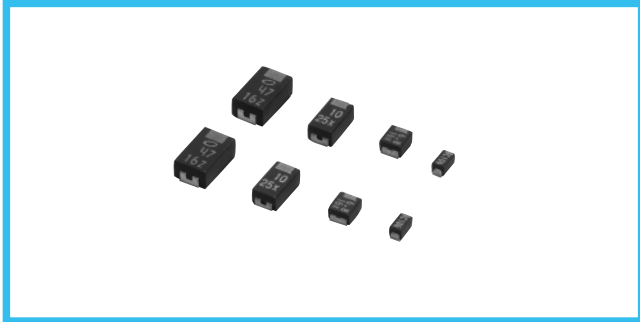


## Applications

- Automotive electronics(Engine ECU)
- Industrial equipment

## Type numbering system (Example : 16V 3.3μF)

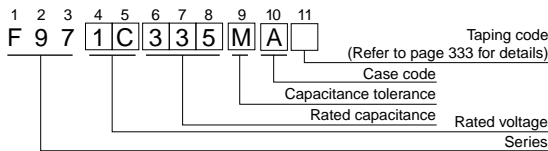


## Drawing

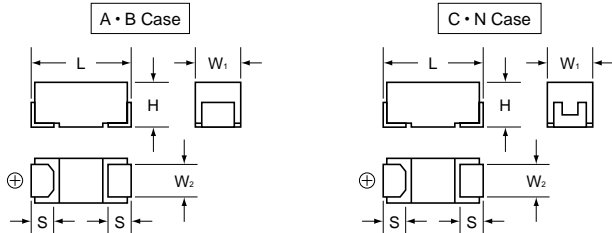

## Dimensions

| Case code | L         | W <sub>1</sub> | W <sub>2</sub> | H         | S         |
|-----------|-----------|----------------|----------------|-----------|-----------|
| A         | 3.2 ± 0.2 | 1.6 ± 0.2      | 1.2 ± 0.1      | 1.6 ± 0.2 | 0.8 ± 0.2 |
| B         | 3.5 ± 0.2 | 2.8 ± 0.2      | 2.2 ± 0.1      | 1.9 ± 0.2 | 0.8 ± 0.2 |
| C         | 6.0 ± 0.2 | 3.2 ± 0.2      | 2.2 ± 0.1      | 2.5 ± 0.2 | 1.3 ± 0.2 |
| N         | 7.3 ± 0.2 | 4.3 ± 0.2      | 2.4 ± 0.1      | 2.8 ± 0.2 | 1.3 ± 0.2 |

## Marking

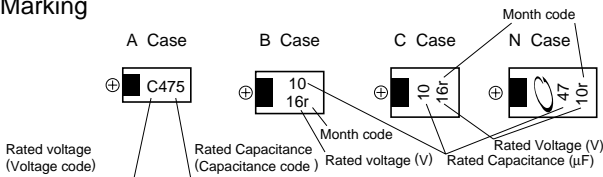

## Standard ratings

| Cap.(μF) | V    | 6.3   | 10          | 16        | 20      | 25      | 35      |
|----------|------|-------|-------------|-----------|---------|---------|---------|
| 0.47     | Code | 0J    | 1A          | 1C        | 1D      | 1E      | 1V      |
| 0.47     | 474  |       |             |           |         |         | A       |
| 0.68     | 684  |       |             |           | A       | A       | A       |
| 1        | 105  |       |             |           | A       | A       | (A)     |
| 1.5      | 155  |       |             | A         | A       |         | (A) · B |
| 2.2      | 225  |       | A           | A         | A       | (A) · B | B       |
| 3.3      | 335  | A     | A           | A         | B       | B       | (B) · C |
| 4.7      | 475  | A     | A · B       | A · B     | A · B   | (B) · C | C       |
| 6.8      | 685  | A · B | B           | B         | (B) · C | C       | (C) · N |
| 10       | 106  |       | A · B       | A · B · C | (B) · C | C · N   | N       |
| 15       | 156  | B     | B           | (B) · C   | N       | (C) · N |         |
| 22       | 226  | A · B | A · B       | B · C · N | C · N   | (N)     |         |
| 33       | 336  | A · C | B · C · N   | B · C · N |         | (N)     |         |
| 47       | 476  | B · C | (B) · C · N | (C) · N   |         |         |         |
| 68       | 686  | N     | N           |           |         |         |         |
| 100      | 107  | N     | (C) · (N)   |           |         |         |         |

## Specifications

| Item                              | Performance Characteristics  |
|-----------------------------------|--|
| Category<br>Temperature Range     | -55 to +125°C (Rated temperature : +85°C)  |
| Capacitance Tolerance             | ±20%, ±10% (at 120Hz)  |
| Dissipation Factor                | Refer to next page   |
| ESR (100kHz)                      | Refer to next page   |
| Leakage Current*                  | <ul style="list-style-type: none"> <li>• After 1 minute's application of rated voltage,leakage current at 20°C is not more than 0.01CV or 0.5μA, whichever is greater.</li> <li>• After 1 minute's application of rated voltage,leakage current at 85°C is not more than 0.1CV or 5μA, whichever is greater.</li> <li>• After 1 minute's application of derated voltage,leakage current at 125°C is not more than 0.125CV or 6.3μA, whichever is greater.</li> </ul> |
| Capacitance Change by Temperature | +15% Max. (at +125°C)<br>+10% Max. (at +85°C)<br>-10% Max. (at -55°C)  |
| Damp Heat (Steady State)          | At 85°C, 85% R.H.,For 1000 hours (No voltage applied)<br>Capacitance Change ..... Within ±10% of the initial value<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... 125% or less than the initial specified value  |
| Load Humidity                     | After 500 hour's application of rated voltage in series with a 33Ω resistor at 60°C, 90 to 95% R.H.,capacitors meet the characteristics requirements table below.<br>Capacitance Change ..... Within ±10% of the initial value<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... 125% or less than the initial specified value  |
| Temperature Cycles                | At -55°C / +125°C,For 30 minutes each,1000 cycles<br>Capacitance Change ..... Within ±5% of the initial value<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less   |
| Resistance to Soldering Heat      | 10 seconds reflow at 260°C, 5 seconds immersion at 260°C.<br>Capacitance Change ..... Within ±5% of the initial value<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less   |
| Solderability                     | After immersing capacitors completely into a solder pot at 245°C for 2 to 3 seconds,more than 3/4 of their electrode area shall remain covered with new solder.  |
| Surge*                            | After application of surge in series with a 33Ω resistor at the rate of 30 seconds ON, 30 seconds OFF,for 1000 successive test cycles at 85°C,capacitors shall meet the characteristic requirements table below.<br>Capacitance Change ..... Within ±5% of the initial value<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less  |
| Endurance*                        | After 2000 hours' application of rated voltage in series with a 3Ω resistor at 85°C,or derated voltage in series with a 3Ω resistor at 125°C,capacitors shall meet the characteristic requirements table below.<br>Capacitance Change ..... Within ±10% of the initial value<br>Dissipation Factor ..... Initial specified value or less<br>Leakage Current ..... Initial specified value or less  |
| Shear Test                        | After applying the pressure load of 5N for 10 ± 1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on a substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.<br>   |
| Terminal Strength                 | Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.<br>   |

\* As for the surge and derated voltage at 125°C, refer to page 332 for details.

( ) The series in parentheses are being developed.

Please contact to your local Nichicon sales office when these series are being designed in your application.

## F97

### Standard Ratings

| Rated Volt | Rated Capacitance (μF) | Case code   | Part Number | Leakage Current (μA) | Dissipation Factor (%@120Hz) | ESR (Ω@100kHz) |
|------------|------------------------|-------------|-------------|----------------------|------------------------------|----------------|
| 6.3V       | 3.3                    | A           | F970J335MAA | 0.5                  | 4                            | 4.5            |
|            | 4.7                    | A           | F970J475MAA | 0.5                  | 6                            | 4.0            |
|            | 6.8                    | A           | F970J685MAA | 0.5                  | 6                            | 3.5            |
|            | 6.8                    | B           | F970J685MBA | 0.5                  | 6                            | 2.5            |
|            | 15                     | B           | F970J156MBA | 0.9                  | 6                            | 2.0            |
|            | 22                     | A           | F970J226MAA | 1.4                  | 12                           | 2.5            |
|            | 22                     | B           | F970J226MBA | 1.4                  | 8                            | 1.9            |
|            | 33                     | A           | F970J336MAA | 2.1                  | 12                           | 2.5            |
|            | 33                     | C           | F970J336MCC | 2.1                  | 6                            | 1.1            |
|            | 47                     | B           | F970J476MBA | 3.0                  | 8                            | 1.0            |
|            | 47                     | C           | F970J476MCC | 3.0                  | 6                            | 0.9            |
|            | 68                     | N           | F970J686MNC | 4.3                  | 6                            | 0.6            |
|            | 100                    | N           | F970J107MNC | 6.3                  | 8                            | 0.6            |
|            | 10V                    | 2.2         | A           | F971A225MAA          | 0.5                          | 4              |
| 3.3        |                        | A           | F971A335MAA | 0.5                  | 4                            | 4.5            |
| 4.7        |                        | A           | F971A475MAA | 0.5                  | 6                            | 4.0            |
| 4.7        |                        | B           | F971A475MBA | 0.5                  | 6                            | 2.8            |
| 6.8        |                        | B           | F971A685MBA | 0.7                  | 6                            | 2.5            |
| 10         |                        | A           | F971A106MAA | 1.0                  | 6                            | 3.0            |
| 10         |                        | B           | F971A106MBA | 1.0                  | 6                            | 2.0            |
| 15         |                        | B           | F971A156MBA | 1.5                  | 6                            | 2.0            |
| 22         |                        | A           | F971A226MAA | 2.2                  | 15                           | 3.0            |
| 22         |                        | B           | F971A226MBA | 2.2                  | 8                            | 1.9            |
| 33         |                        | B           | F971A336MBA | 3.3                  | 8                            | 1.9            |
| 33         |                        | C           | F971A336MCC | 3.3                  | 6                            | 1.1            |
| 33         |                        | N           | F971A336MNC | 3.3                  | 6                            | 0.7            |
| 47         |                        | C           | F971A476MCC | 4.7                  | 8                            | 0.9            |
| 47         | N                      | F971A476MNC | 4.7         | 6                    | 0.7                          |                |
| 68         | N                      | F971A686MNC | 6.8         | 6                    | 0.6                          |                |
| 16V        | 1.5                    | A           | F971C155MAA | 0.5                  | 4                            | 6.3            |
|            | 2.2                    | A           | F971C225MAA | 0.5                  | 4                            | 5.0            |
|            | 3.3                    | A           | F971C335MAA | 0.5                  | 4                            | 4.5            |
|            | 4.7                    | A           | F971C475MAA | 0.8                  | 8                            | 4.0            |
|            | 4.7                    | B           | F971C475MBA | 0.8                  | 6                            | 2.8            |
|            | 6.8                    | B           | F971C685MBA | 1.1                  | 6                            | 2.5            |
|            | 10                     | A           | F971C106MAA | 1.6                  | 8                            | 3.5            |
|            | 10                     | B           | F971C106MBA | 1.6                  | 6                            | 2.1            |
|            | 10                     | C           | F971C106MCC | 1.6                  | 6                            | 1.5            |
|            | 15                     | C           | F971C156MCC | 2.4                  | 6                            | 1.2            |
|            | 22                     | B           | F971C226MBA | 3.5                  | 8                            | 1.9            |
|            | 22                     | C           | F971C226MCC | 3.5                  | 8                            | 1.1            |
|            | 22                     | N           | F971C226MNC | 3.5                  | 6                            | 0.7            |
|            | 33                     | B           | F971C336MBA | 5.3                  | 10                           | 2.1            |
| 33         | C                      | F971C336MCC | 5.3         | 8                    | 1.1                          |                |
| 33         | N                      | F971C336MNC | 5.3         | 6                    | 0.7                          |                |
| 47         | N                      | F971C476MNC | 7.5         | 8                    | 0.7                          |                |
| 20V        | 0.68                   | A           | F971D684MAA | 0.5                  | 4                            | 7.6            |
|            | 1                      | A           | F971D105MAA | 0.5                  | 4                            | 7.5            |
|            | 1.5                    | A           | F971D155MAA | 0.5                  | 4                            | 6.7            |
|            | 2.2                    | A           | F971D225MAA | 0.5                  | 6                            | 6.3            |
|            | 3.3                    | B           | F971D335MBA | 0.7                  | 4                            | 3.1            |
|            | 4.7                    | A           | F971D475MAA | 0.9                  | 8                            | 4.0            |
|            | 4.7                    | B           | F971D475MBA | 0.9                  | 6                            | 2.8            |
|            | 6.8                    | C           | F971D685MCC | 1.4                  | 6                            | 1.8            |
|            | 10                     | C           | F971D106MCC | 2.0                  | 6                            | 1.5            |
|            | 15                     | N           | F971D156MNC | 3.0                  | 6                            | 0.7            |
|            | 22                     | C           | F971D226MCC | 4.4                  | 8                            | 1.1            |
|            | 22                     | N           | F971D226MNC | 4.4                  | 6                            | 0.7            |

| Rated Volt | Rated Capacitance (μF) | Case code   | Part Number | Leakage Current (μA) | Dissipation Factor (%@120Hz) | ESR (Ω@100kHz) |
|------------|------------------------|-------------|-------------|----------------------|------------------------------|----------------|
| 25V        | 0.68                   | A           | F971E684MAA | 0.5                  | 4                            | 7.6            |
|            | 1                      | A           | F971E105MAA | 0.5                  | 4                            | 7.5            |
|            | 2.2                    | B           | F971E225MBA | 0.6                  | 4                            | 3.8            |
|            | 3.3                    | B           | F971E335MBA | 0.8                  | 4                            | 3.5            |
|            | 4.7                    | C           | F971E475MCC | 1.2                  | 6                            | 1.8            |
|            | 6.8                    | C           | F971E685MCC | 1.7                  | 6                            | 1.8            |
|            | 10                     | C           | F971E106MCC | 2.5                  | 6                            | 1.6            |
|            | 10                     | N           | F971E106MNC | 2.5                  | 6                            | 1.0            |
|            | 15                     | N           | F971E156MNC | 3.8                  | 6                            | 0.7            |
|            | 35V                    | 0.47        | A           | F971V474MAA          | 0.5                          | 4              |
| 0.68       |                        | A           | F971V684MAA | 0.5                  | 4                            | 7.6            |
| 1.5        |                        | B           | F971V155MBA | 0.5                  | 4                            | 4.0            |
| 2.2        |                        | B           | F971V225MBA | 0.8                  | 4                            | 3.8            |
| 3.3        |                        | C           | F971V335MCC | 1.2                  | 4                            | 2.0            |
| 4.7        |                        | C           | F971V475MCC | 1.6                  | 6                            | 1.8            |
| 6.8        |                        | N           | F971V685MNC | 2.4                  | 6                            | 1.0            |
| 10         | N                      | F971V106MNC | 3.5         | 6                    | 1.0                          |                |

※ In case of capacitance tolerance ±10% type, [K] will be put at 9th digit of type numbering system.