


10 Amp Schottky Barrier Rectifiers

FST10120 – FST10150

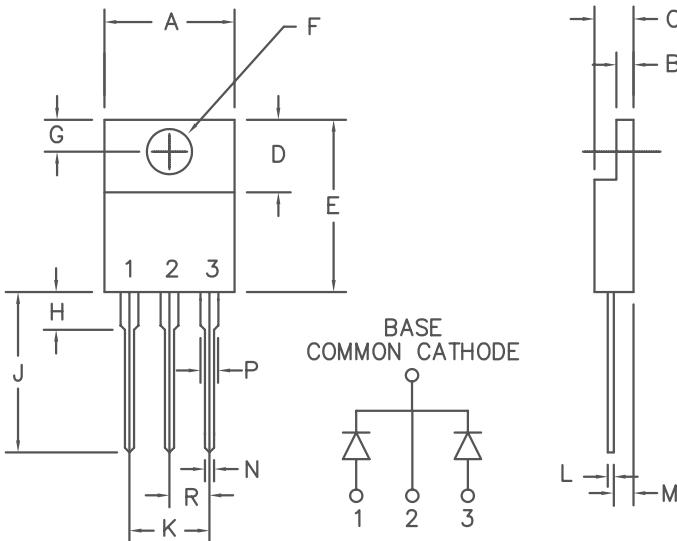

| Dim. | Inches | | Millimeter | | Notes |
|------|---------|---------|------------|---------|-------|
| | Minimum | Maximum | Minimum | Maximum | |
| A | .390 | .415 | 9.91 | 10.54 | |
| B | .045 | .055 | 1.14 | 1.40 | |
| C | .180 | .190 | 4.57 | 4.83 | |
| D | .245 | .260 | 6.22 | 6.60 | |
| E | .550 | .650 | 13.97 | 16.51 | |
| F | .139 | .161 | 3.53 | 4.09 | Dia. |
| G | .100 | .135 | 2.54 | 3.43 | |
| H | --- | .250 | --- | 6.35 | |
| J | .500 | .580 | 12.70 | 14.73 | |
| K | .190 | .210 | 4.83 | 5.33 | |
| L | .014 | .022 | .357 | .559 | |
| M | .080 | .115 | 2.03 | 2.92 | |
| N | .015 | .040 | .380 | 1.02 | |
| P | .045 | .070 | 1.14 | 1.78 | |
| R | .090 | .110 | 2.29 | 2.79 | |

PLASTIC TO-220AB

Technical Bulletin

| Microsemi Catalog Number | Industrial Part Number | Repetitive Peak Reverse Voltage | Transient Peak Reverse Voltage |
|--------------------------|------------------------|---------------------------------|--------------------------------|
| FST10120 | | 120V | 120V |
| FST10130 | | 130V | 130V |
| FST10150 | 10CTQ150 | 150V | 150V |

- Schottky barrier rectifier
- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- V_{RRM} 120 to 150 Volts

Electrical Characteristics

| | | |
|-----------------------------------|----------------------|--|
| Average Forward Current per pkg. | $I_{F(AV)}$ 10 Amps | $T_C = 162^\circ C$, Square wave, $R_{\theta JC} = 1.8^\circ C/W$ |
| Average Forward Current per leg | $I_{F(AV)}$ 5 Amps | $T_C = 162^\circ C$, Square wave, $R_{\theta JC} = 3.6^\circ C/W$ |
| Maximum Surge Current per leg | I_{FSM} 200 Amps | 8.3ms, half sine, $T_J = 175^\circ C$ |
| Typ. Peak Forward Voltage per leg | V_{FM} 0.63 Volts | $I_{FM} = 5A, T_J = 125^\circ C^*$ |
| Max. Peak Forward Voltage per leg | V_{FM} 0.82 Volts | $I_{FM} = 5A, T_J = 25^\circ C^*$ |
| Typ. Peak Reverse Current per leg | I_{RM} 125 μA | $V_{RRM}, T_J = 125^\circ C^*$ |
| Max. Peak Reverse Current per leg | I_{RM} 100 μA | $V_{RRM}, T_J = 25^\circ C$ |
| Typical Junction Capacitance | C_J 180 pF | $V_R = 5.0V, T_J = 25^\circ C$ |

*Pulse test: Pulse width 300 μ sec Duty cycle 2%

Thermal and Mechanical Characteristics

| | | |
|--------------------------------------|-----------------|-------------------------------------|
| Storage temp range | TSG | -55°C to 175°C |
| Operating junction temp range | TJ | -55°C to 175°C |
| Max thermal resistance per leg | $R_{\theta JC}$ | 3.6°C/W Junction to case |
| Max thermal resistance per pkg. | $R_{\theta JC}$ | 1.8°C/W Junction to case |
| Typical thermal resistance (greased) | $R_{\theta CS}$ | 0.5°C/W Case to sink |
| Mounting torque | | 8-12 inch pounds maximum (#6 screw) |
| Weight | | .08 ounces (2.3 grams) typical |

FST10120 – FST10150

Figure 1
Typical Forward Characteristics – Per Leg

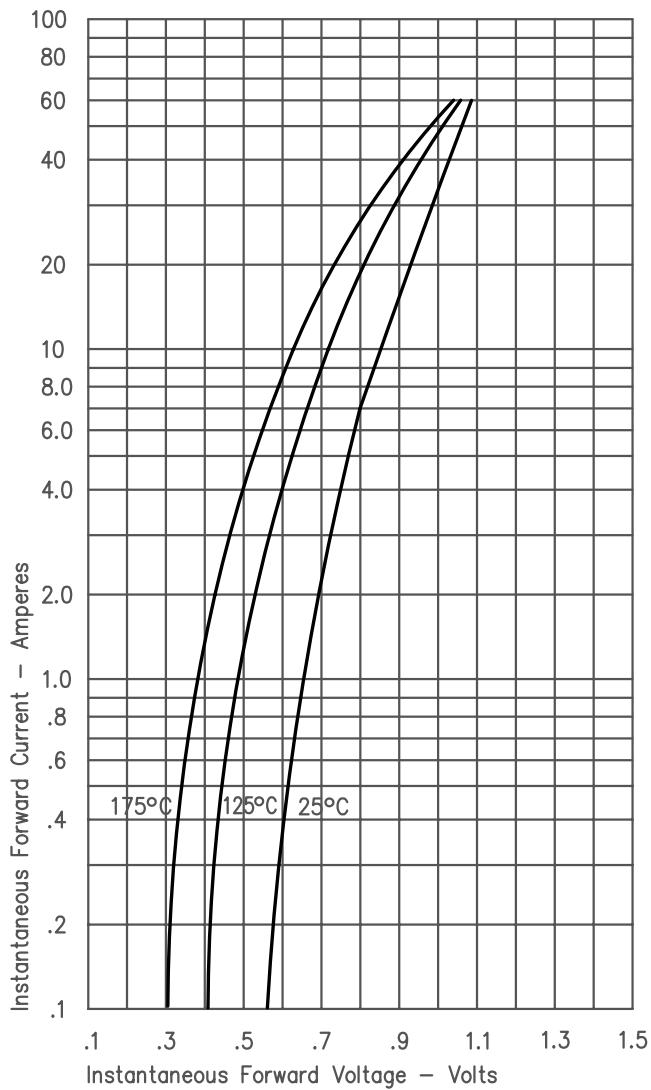


Figure 2
Typical Reverse Characteristics – Per Leg

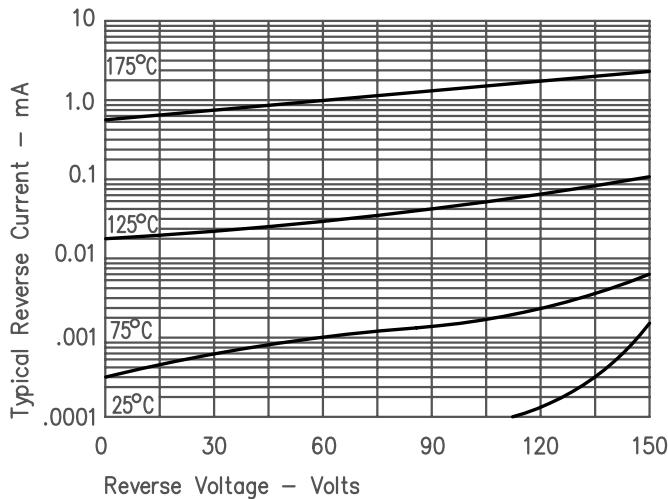


Figure 3
Typical Junction Capacitance – Per Leg

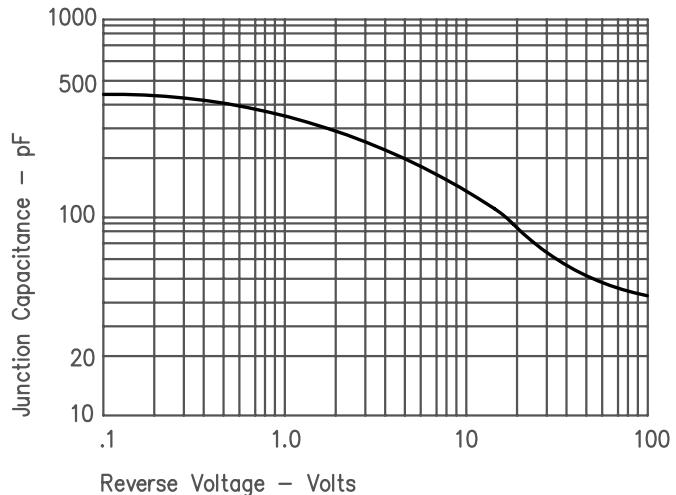


Figure 4
Forward Current Derating – Per Leg

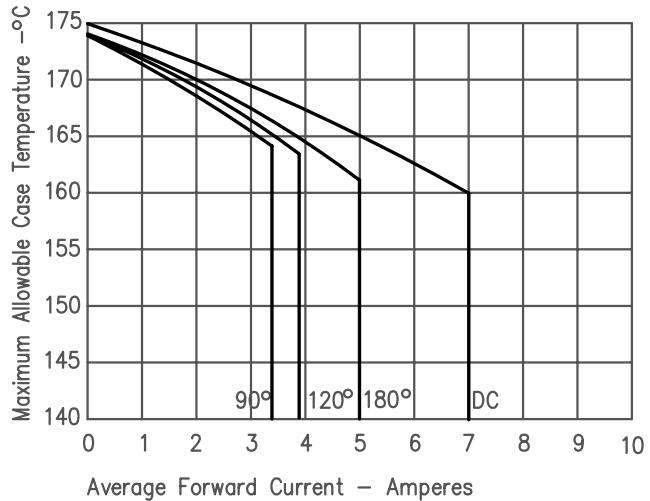


Figure 5
Maximum Forward Power Dissipation – Per Leg

