




VD-7015

ISDN SPLITTER

P/N: VD-7015 DATA SHEET

Feature




- Design to meet , UL94v-0.
- Operating temperature range: -10 to +60 .
- Storage temperature range: -25 to +75 .

Electrical Specifications @ 25°C	
Description	LPF
Application	SH/LH
Pass-band Frequency	DC to 630KHz
Insertion Loss	-1.5dB Max. @20KHz 630KHz
Return Loss	-12dB Min. @20KHz 630KHz
Stop-band Frequency	900KHz 7.9MHz
Attenuation	-30dB MIN
I.R	Pin (1-2) & Pin (1,2,9,10)-Pin (4,5,7,8,12,13,15,16)@250Vdc, 10Mohm MIN 5Sec
HI-POT	Pin (1-2)@ 400Vdc , 2Sec
Impedance	1500

Mechanical

PIN	ALOCALTION
1	LINE+
2	LINE-
9	TEL+
10	TEL-
3,4,5,6,7,8,	NC
11,12,13,14,15,16	NC

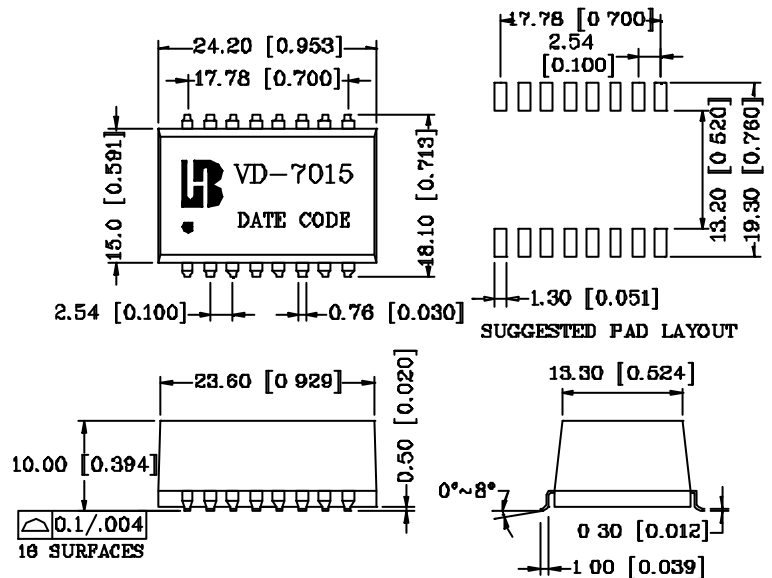

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±[0.002]