

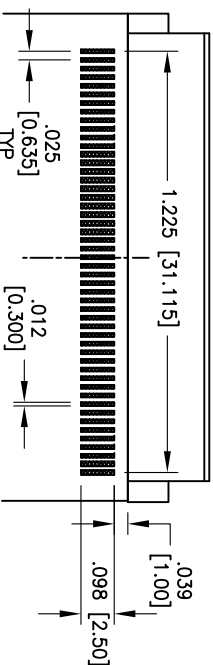
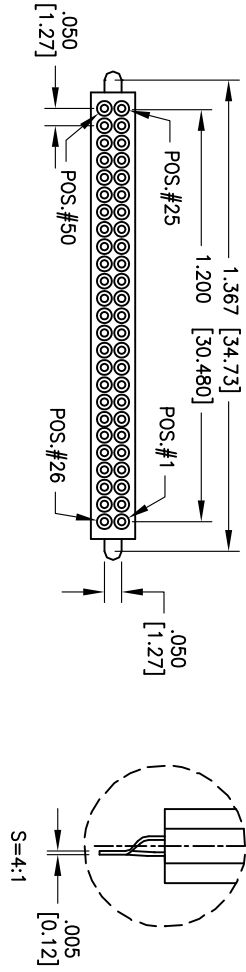
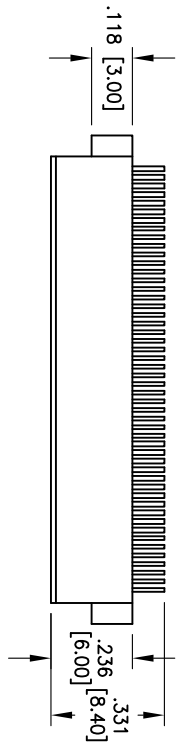


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/14/10	

APPROVED: _____ TITLE: _____
 DATE: _____

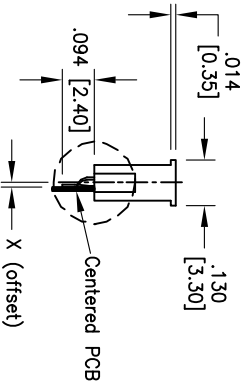

RECOMMENDED PCB LAYOUT

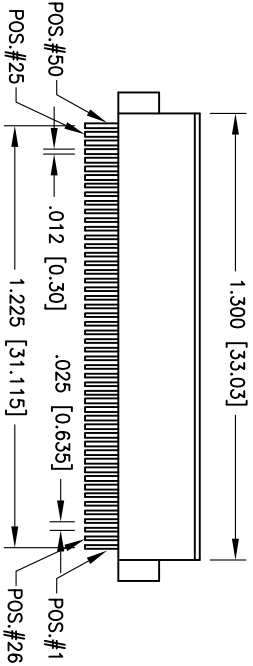

ADAM P/N	X (OFFSET)
CFS-50-A-SMT-A	0.00 [0.00]
CFS-50-A-SMT-B	.012 [0.30]
CFS-50-A-SMT-C	.024 [0.60]
CFS-50-A-SMT-D	.035 [0.90]

SPECIFICATIONS:

Material: Insulator: High Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contact: Copper Alloy
 Grounding Plate: Copper Alloy
 Plating: 10u" Gold over Nickel underplate on contact area.

Electrical: Current rating: 0.5 Amps max
 Dielectric withstanding voltage: 500 VAC for 1 minute.
 Temperature Rating: Operating temperature: -10°C to +70°C

Environmental: Lead free, RoHS Compliant
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

TITLE	COMPACT FLASH SOCKET, 50 POSITION VERTICAL, SMT, X (OFFSET)
SIZE	X
PART NO.	CFS-50-A-SMT-X
REV.	
REF.	S00096T
SCALE	NIS
SHEET	1 OF 1