Panasonic ideas for life

Ideas for Wireless Solutions

Bluetooth low energy - Module PAN1720

OUTLINES



This Bluetooth low energy single-mode module has been specially developed for applications which communicate with dual or single mode Bluetooth low energy devices like mobile phones, PDAs, Laptops etc. So it is very easy to expand you personal area network with this module, using existing gateways. The included Bluetooth low energy stack is currently supporting the proximity and battery profile. The user specific application can be written on top of the Bluetooth Stack. The communication between stack and application is handled via vendor specific HCI-Commands. The PAN1720-Module is manufactured in a very small 15.6 x 8.7 x 1.9 mm³ SMD package with shielded case and will be qualified, according to the Bluetooth 4.0 standard.

FEATURES

General

- Complete Bluetooth low energy solution (Bluetooth 4.0)
- Supported Profiles: Proximity and Battery profiles
- Low power 8051 μ C included
- Up to 256k Flash and 8k RAM
- Data rates up to 1 Mbps
- IR Generation Circuitry
- AES Security Coprocessor
- Temperature Range from -40°C to +85°C
- Supply Voltage Range from 2.0V to 3.6V, typ. 3.0V
- Dimension only 15.6 x 8.7 x 1.9 mm³
- Dimension and Footprint compatible to PAN1320/21

Interfaces

- Two powerful USARTs with support for several serial protocols
- Full speed USB 2.0 interface
- 19 general-purpose I/O pins (17x 4mA, 2x20 mA)
- 12-Bit ADC with eight channels and configurable resolution

Design and Specifications are subject to change without notice. Ask the factory for technical specifications before purchase and/or use. If there is any doubt regarding the safety of this product, kindly inform us immediately for technical consultation. PAN1720 BT4.0 Rev. A2

Hardware Status: Engineering Samples

Electronic Devices Europe GmbH

Panasonic

Panasonic ideas for life



CONTACT

Dipl.-Ing. Mathias Hopp Product Manager Wireless Connectivity

Panasonic Electronic Devices Europe GmbH Zeppelinstrasse 19 21337 Lüneburg, Germany


Tel. +49-4131-899-283 Fax +49-4131-899-187 Mathias.Hopp@eu.panasonic.com


APPLICATIONS

- 01010001010
- 2.4 GHz Bluetooth low energy systems
- Proprietary 2.4 GHz systems
- Human Interface Devices
- Sports and leisure equipment
- Mobile phone accessories

BLOCK DIAGRAM

- Remote control for computers, MP3 players
- Consumer Electronics
- USB dongles
- Health Care and Medical



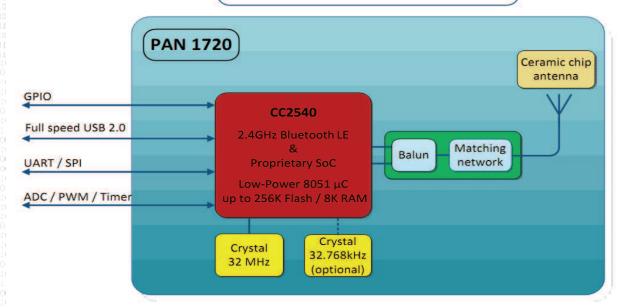

TECHNICAL CHARACTERISTICS

Parameter	Value	Condition / Note
Receiver Sensitivity (1% PER)	-94 dBm	@ 500 kpbs / MSK (high-gain mode)
Output Power	+3 dBm typ.	Maximum setting
Power Supply	2,0 - 3,6 V	Single operation voltage
Sleep Mode	0.5μΑ	Power mode 3 (lowest)
Transmit Mode	28mA	@ 0dBm (peak current)
Receive Mode	18mA	Standard mode
Operating Temperature Range	-40°C to +85°C	Industrial Range