



### FEATURES

- Normally Close, Single Pole Single Throw
- Control 400 VAC or DC Voltage
- Switch 130 mA Loads
- LED Control Current, 2mA
- Low ON-Resistance
- dv/dt, >500 V/ms
- Isolation Test Voltage, 3750 VAC<sub>RMS</sub>
- UL, CSA, FCC compatible
- Applications
  - Telecommunications
  - Telecom Switching
  - Tip/Ring Circuits
  - Modem Switching (Laptop, Notebook, Pocket Size)
  - Hookswitch
  - Dial Pulsing
  - Ground Start
  - Ringer Injection
  - Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
  - Medical Equipment
  - High Voltage Test Equipment
  - TRIAC Driver
  - Motor Control
  - Security
  - Aerospace
  - Industrial Controls

### DESCRIPTION

The LH1521 is a single pole single throw (SPST), normally close (NC), Mos Relay. The relay can control AC or DC loads currents up to 130 mA, with a supply voltage up to 400 V. The device is packaged in a 8 pin SMD and dual-in line package. Those package offer an insulation dielectric withstand of 3750 VAC<sub>RMS</sub>.

The coupler consists of a AlGaAs LED that is optically coupled to a dielectrically isolated photodiode array which drives two series connected high voltage MOS transistors. The typical ON-Resistance is 40Ω at 25 mA and is linear up to 50mA. The incremental resistance drops to less than 40Ω beyond 50 mA while reducing internal power dissipation at high load currents.

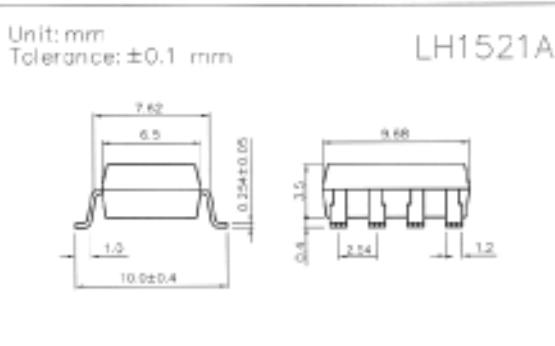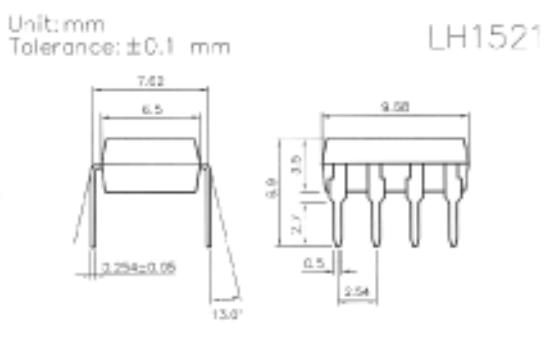

### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

#### Emitter (Input)

Reverse Voltage	5.0V
Continuous Forward Current	50mA
Peak Forward Current (Is)	1A
Power Dissipation	100mW
Derate Linearly from 25°C	1.3mW/°C

#### Detector (Output)



Output Breakdown Voltage	±400V
Continuous Load Current	±130mA
Power Dissipation	500mW

#### General Characteristics




Isolation Test Voltage	3750VAC <sub>RMS</sub>
Isolation Resistance	$\geq 10^{10}\Omega$

$V_{IO} = 500V$ , $T_A = 25^\circ\text{C}$	$\geq 10^{10}\Omega$
Total Power Dissipation	550mW
Derate Linearly from 25°C	2.5mW/°C
Storage Temperature Range	-40 to + 150°C
Operating Temperature Range	-40 to + 85°C
Junction Temperature	100°C
Soldering Temperature, 2mm from case, 10 sec...	260°C

#### Operate/Reverse time

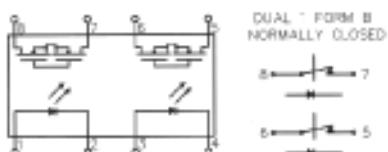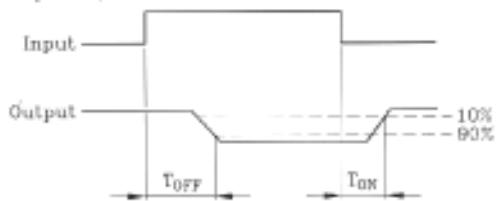

Characteristics							(T <sub>A</sub> = 25°C)
Description	Symbol	Min.	Typ.	Max.	Unit	Test Condition	
<b>Emitter (Input)</b>							
Forward Voltage	V <sub>F</sub>		1.8	2.0	V	I <sub>F</sub> = 10 mA	
Operation Input Current	I <sub>POFF</sub>			5	mA	V <sub>L</sub> = ± 20 V, I <sub>L</sub> = < 5 µA	
Recovery Input Current	I <sub>PON</sub>	0.2			mA	V <sub>L</sub> = ± 20 V, I <sub>L</sub> = 100 mA, t = 10 ms	
<b>Detector (output)</b>							
Output Breakdown Voltage	V <sub>B</sub>	400			V	I <sub>B</sub> = 50 µA	
Output Off-State Leakage	I <sub>TOFF</sub>		0.2	1	µA	V <sub>T</sub> = 100 V, I <sub>F</sub> = 10 mA	
I/O Capacitance	C <sub>ISO</sub>		6		pF	I <sub>F</sub> = 0, f = 1 MHz	
ON Resistance	R <sub>ON</sub>		40	50	Ω	I <sub>L</sub> = 100 mA, I <sub>P</sub> = 0 mA	
Reverse (ON) Time	T <sub>ON</sub>		0.6	1.5	ms	I <sub>F</sub> = 10 mA, V <sub>L</sub> = ± 20 V	
Operate (OFF) Time	T <sub>OFF</sub>		0.3	1.0	ms	t = 10 ms, I <sub>L</sub> = ± 130 mA	


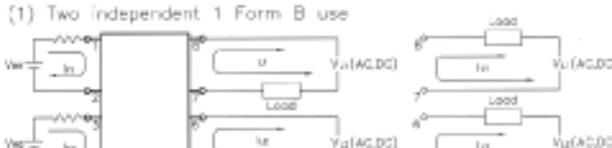
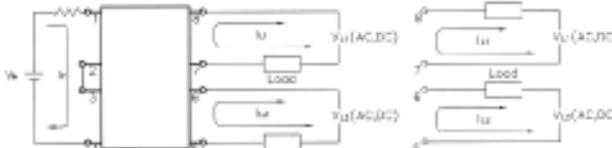
Mos Relay Schematic and Wiring Diagrams						
Type	Schematic	Output configuration	Load	Connection	Wiring diagram	
LH1521 & LH1521A		2b	AC/DC	-	(1) Two independent 1 Form B use  (2) 2 Form B use 	

## DATA CURVE

Load current vs. ambient temperature  
Allowable ambient temperature:  
-40°C to + 85°C

On resistance vs. ambient temperature  
Across terminals 5,7 and 6,8 pin  
LED current: 5 mA  
Continuous load current: 130 mA(DC)

Operate (OFF) time vs. ambient temperature;  
Load voltage 400 V(DC)  
LED current : 5 mA  
Continuous load current: 130 mA(DC)

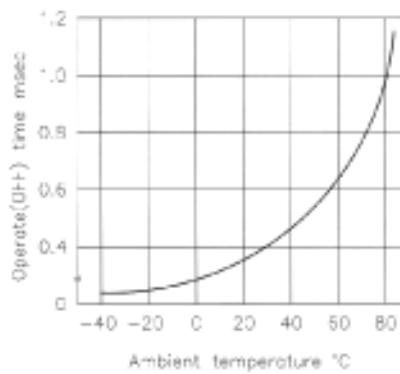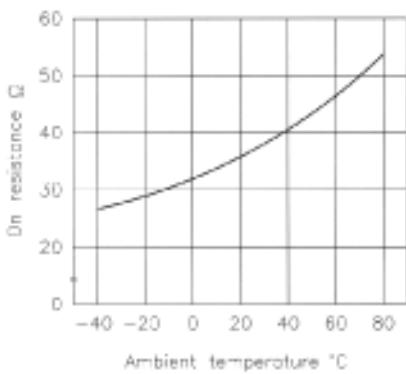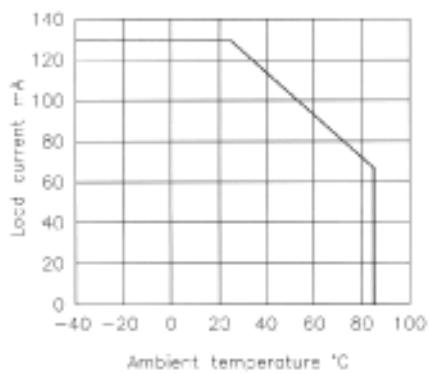

65 Shark River Road, Neptune, New Jersey 07753-7423

Tel: 732-922-6333 Fax: 732-922-6363 E-Mail: globalcomponents@msn.com