

140 COMMERCE DRIVE MONTGOMERYVILLE, PA 18936-1013 PHONE: (215) 631-9840 FAX: (215) 631-9855


RF & MICROWAVE TRANSISTORS UHF MOBILE APPLICATIONS

Features

- 470 MHz
- 12.5 VOLTS
- **P**_{OUT} = 10 WATTS
- $G_P = 8.0 \text{ dB MINIMUM}$
- COMMON EMITTER CONFIRGURATION



The MS1426 is a epitaxial silicon NPN planar transistor designed for Class C driver applications in the 450 - 512 MHz frequency range. This device uses an emitter ballasted die geometry specifically designed for optimum stable power gain, maximum efficiency and infinite VSWR capability.



ABSOLUTE MAXIMUM RATINGS (Tcase = 25°C)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	36	V
V _{CEO}	Collector-Emitter Voltage	16	V
V _{CES}	Collector-Emitter Voltage	36	V
V _{EBO}	Emitter-Base Voltage	4.0	V
Ι _c	Device Current	2.5	Α
P _{DISS}	Power Dissipation	58	W
TJ	Junction Temperature	200	°C
T _{STG}	Storage Temperature	-65 to +150	°C

Thermal Data

R _{TH(J-C)}	Junction-case Thermal Resistance	3.0	°C/W
----------------------	----------------------------------	-----	------



.280 4L STUD (M122)

epoxy sealed



MS1426

ELECTRICAL SPECIFICATIONS (Tcase = 25°C) STATIC

Symbol	Test Conditions		Value			
Symbol			Min.	Typ.	Max.	Unit
BV _{CES}	I _c = 25 mA	$V_{BE} = 0 V$	36			V
BV _{CEO}	I _c = 20 mA	I _B = 0 mA	16			V
BV _{EBO}	I _E = 10 mA	I _c = 0 mA	4.0			V
I _{CES}	V _{CE} = 10 V	I _E = 0 mA			3.0	mA
I _{сво}	V _{CB} = 15V	I _E = 0 mA			2.0	mA
H _{FE}	$V_{CE} = 5 V$	$I_{\rm C} = 1 \rm A$	10		150	

DYNAMIC

Symbol	Test Conditions		Value		Unit		
Symbol			Min.	Тур.	Max.	Onit	
Pout	f = 470 MHz	P _{IN} = 2.0W	$V_{CE} = 12.5V$	10			w
G _P	f = 470 MHz	P _{IN} = 2.0W	V _{CE} = 12.5V	7			dB
Сов	f = 1 MHz	V _{CB} = 12.5V				26	pf

IMPEDANCE DATA


FREQ	$Z_{IN}(\Omega)$	$Z_{CL}(\Omega)$
470MHz	1.5 - j2.7	5.7 + j1.5
P _{IN} = 2.0W		

 $V_{CE} = 12.5V$



MS1426

PACKAGE MECHANICAL DATA

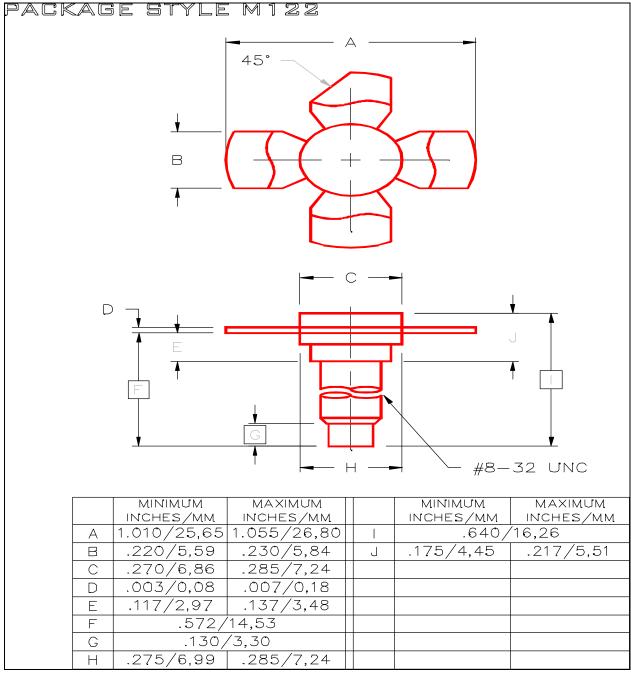

Advanced Power Technology reserves the right to change, without notice, the specifications and information contained herein Visit our website at **WWW.ADVANCEDPOWER.COM** or contact our factory direct.