

NEC's 1310 nm InGaAsP MQW FP TOSA FOR 2.5 Gb/s INTRA-OFFICE APPLICATION

NX7315UA

FEATURES

- OPTICAL OUTPUT POWER: Pf = 0.6 mW
- LOW THRESHOLD CURRENT Ith = 8 mA TYP @ Tc = 25°C
- WIDE OPERATING TEMPERATURE RANGE: -40 to +85°C
- · InGaAs MONITOR PIN-PD
- SMALL PACKAGE ø3.8 mm (Total length 12.0 mm MAX
- BASED ON Telcordia Reliability GR-468-CORE

DESCRIPTION


NEC's NX7315UA is a 1310 nm Multiple Quantum Well (MQW) structured Fabry-Perot (FP) laser diode transmitter optical subassembly (TOSA) with InGaAs monitor PIN-PD in a receptacle type package designed for LC type SFF/SFP transceiver modules. These devices are ideal for Synchronous Digital Hierarchy (SDH) systems, STM-16 Intraoffice I-16 ITU-T recommendations, and SONET OC-48(SR).

ELECTRO-OPTICAL CHARACTERISTICS (Tc = -40 to +85°C, unless otherwise specified)

PART NUMBER				NX7315UA		
SYMBOLS	PARA	METERS AND CONDITIONS	UNITS	MIN	TYP	MAX
Vop	Operating Voltage, CW, Pf = 0.6 mW		V	_	1.2	1.5
Ітн	Threshold Current	CW, Tc = 25°C	mA	4	8	20
		CW				
ηd	Differential Efficiency	CW, Tc = 25°C	W/A	0.15	0.020	0.030
		CW	W/A	0.010	_	0.042
Pf	Optical Output Power, CW		mW	-	0.6	_
Iмор	Modulation Current ¹	CW, Pf = 0.6 mW, Tc = 25°C	mA	20	25	40
		CW, Pf = 0.6 mW	mA	14	_	60
λς	Center Wavelength, CW, Pf = 0.6 mW, RMS (-20 dB)		nm	1266	_	1360
σ	Spectral Width, CW, Pf = 0.6 mW, RMS (-20 dB)		nm	_	_	4.0
tr	Rise Time, IB = ITH, 10 to 90%		ns	-	_	0.2
tf	Fall Time, IB = ITH, 90 to 10%		ns	_	_	0.2
lm	Monitor Current, CW, Pf = 0.3 mW, VR = 1.5 V		μΑ	200	_	1200
lD	Monitor Dark Current	VR = 1.5 V, Tc = 25 °C	nA	_	_	50
		VR = 1.5 V	nA	-	_	500
γ	Tracking Error ² , CW, Im = const. (Pf = 0.6mW)		dB	-1.5	_	1.5
	Connector Repeatability, master pigtail		dB	-1.0	_	1.0

Note:

2. Tracking Error: γ



^{1.} Modulation current: Imod \geq 25mApp at TC = 25°C is recommended in order to satisfy 20 % eye mask margin for STM-16(1-16)/OC-48(SR)


ABSOLUTE MAXIMUM RATINGS¹


(Tc = 25°C, unless otherwise specified)


SYMBOLS	PARAMETERS	UNITS	RATINGS
Pf	Optical Output Power	mW	10
lF	Forward Current of LD	mA	150
VR	Reverse Voltage of LD	٧	2.0
lF	Forward Current of PD	mA	10
VR	Reverse Voltage of PD	V	20
Tc	Operating Case Temperature	°C	-40 to +85
Тѕтс	Storage Temperature	°C	-40 to +85
TSLD	Lead Soldering Temperature (10 s)	°C	350 (3.5 sec)
RH	Relative Humidity (noncondensing)	%	85

Note:

TYPICAL PERFORMANCE CURVES (Tc = 25°C unless otherwise specified)








Remark: The graphs indicate nominal characteristics.


Operation in excess of any one of these parameters may result in permanent damage.

TYPICAL PERFORMANCE CURVES (Tc = 25°C unless otherwise specified)

ERROR RATE CHARACTERISTICS




EYE DIAGRAM




Back to Back (100 ps/div.)

ERROR RATE CHARACTERISTICS




EYE DIAGRAM




Back to Back (100 ps/div.)

ERROR RATE CHARACTERISTICS




EYE DIAGRAM



Back to Back (100 ps/div.)


OUTLINE DIMENSIONS (Units in mm)

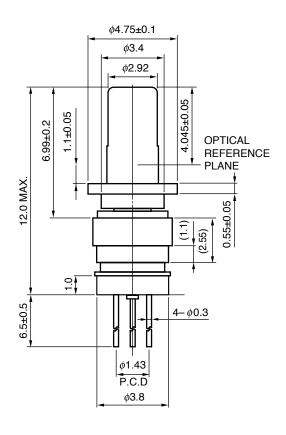

BOTTOM VIEW



PIN CONNECTIONS



ORDERING INFORMATION

PART NUMBER	PACKAGE	PIN CONNECTION	
NX7315UA-AZ*	Ø3.8 mm TOSA	1 • LD 2	
		PD 3	

*NOTE:

Please refer to the last page of this data sheet, "Compliance with EU Directives" for Pb-Free RoHS Compliance Infomation.

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.
4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • www.cel.com

DATA SUBJECT TO CHANGE WITHOUT NOTICE



Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL's understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)	Concentration contained in CEL devices	
Lead (Pb)	< 1000 PPM	-A Not Detected	-AZ (*)
Mercury	< 1000 PPM	Not Detected	
Cadmium	< 100 PPM	Not Detected	
Hexavalent Chromium	< 1000 PPM	Not Detected	
PBB	< 1000 PPM	Not Detected	
PBDE	< 1000 PPM	Not Detected	

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerting the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL's liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.