

## **333/R2C1-AQUB**

#### **Features**

- Popular T-1 3/4package.
- High efficiency.
- General purpose leads.
- Selected minimum intensities
- Available on tape and reel.
- ESD-withstand voltage: up to 4KV
- The product itself will remain within RoHS compliant version.
- UV resistant epoxy

#### **Descriptions**

- The series is specially designed for applications requiring higher brightness.
- The LED lamps are available with different colors, intensities, epoxy colors, etc.
- Superior performance in outdoor environment

#### **Applications**

- Single or Dual Color Graphic Signs
- Message boards
- Variable message signs (VMS)
- Commercial outdoor advertising

# 

#### **Device Selection Guide**


I ED David Na	C	I ama Calam		
LED Part No.	Material	<b>Emitted Color</b>	Lens Color	
333/R2C1-AQUB	AlGaInP	Hyper Red	Water Clear	

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev 1 Page: 1 of 7

Device Number: DLE-033-B01 Prepared date:01-16-2006 Prepared by:Flourix Chen



# 333/R2C1-AQUB

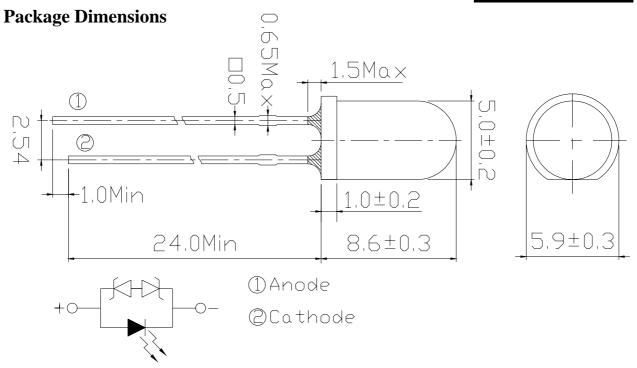

#### **Notes:**

- Other dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Protruded resin under flange is 1.5mm Max LED.
- Bare copper alloy is exposed at tie-bar portion after cutting.

#### **Absolute Maximum Rating (T<sub>a</sub>=25°C)**

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Current	$I_F$	50	mA
Pulse Forward Current (Duty1/10@ 1KHz)	$ m I_{FP}$	160	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	$T_{stg}$	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	4K	V
Soldering Temperature	$T_{sol}$	260 ±5	$^{\circ}\!\mathbb{C}$
Power Dissipation	$P_d$	130	mW
Reverse Voltage	VR	5	V
Zener Reverse Current	Iz	100	mA

Notes: Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev 1 Page: 2 of 7

Device Number: DLE-033-B01 Prepared date:01-16-2006 Prepared by:Flourix Chen



# 333/R2C1-AQUB

## Electro-Optical Characteristics ( $T_a=25^{\circ}C$ )

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	$I_{V}$	3600		11250	mcd	
Viewing Angle	$2 heta_{ ext{1/2}}$		15		deg	
Peak Wavelength	λp		632			
Dominant Wavelength	λa		624		nm	I <sub>F</sub> =20mA
Spectrum Half width	Δλ		20			
Forward Voltage	$V_{\mathrm{F}}$	1.8		2.6	V	
Reverse Current	$I_R$			10	$\mu$ A	V <sub>R</sub> =5V
Zener Reverse Voltage	Vz	5.2			V	Iz=5mA

### Rank Combination (I<sub>F</sub>=20mA)

Rank	Q	R	S	T	U
Luminous Intensity	3600~4500	4500~5650	5650~7150	7150~9000	9000~11250

<sup>\*</sup>Measurement Uncertainty of Luminous Intensity: ±15%

Unit:mcd

Rank	1	2	3	4
Forward Voltage	1.8~2.0	2.0~2.2	2.2~2.4	2.4~2.6

<sup>\*</sup>Measurement Uncertainty of Forward Voltage: ±0.1V

Unit:V

Rank	1	2	3	
Dominant Wavelength	618~622	622~626	626~630	

<sup>\*</sup>Measurement Uncertainty of Dominant Wavelength ±1.0nm

Unit:nm

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev 1 Page: 3 of 7

Device Number: DLE-033-B01 Prepared date:01-16-2006 Prepared by:Flourix Chen


<sup>\*</sup>The quantity ratio of the ranks is decided by EVERLIGHT.




## **333/R2C1-AQUB**

#### **Typical Electro-Optical Characteristics Curves**


#### Relative Intensity vs. Wavelength

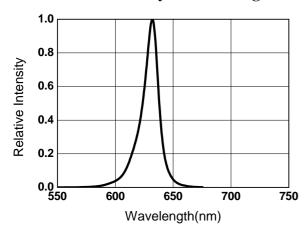


#### Forward Current vs. Forward Voltage

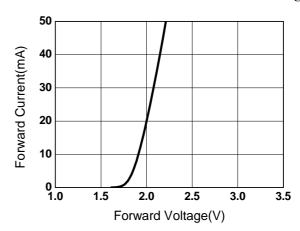


**Relative Intensity vs. Ambient Temp** 

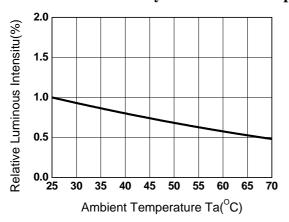


Forward Current vs. Relative Intensity

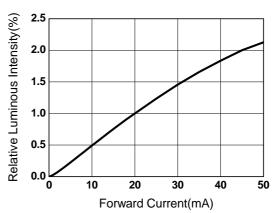

#### Forward Current vs. Ambient Temp.

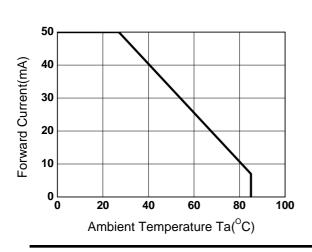

#### **Radiation Characteristics**

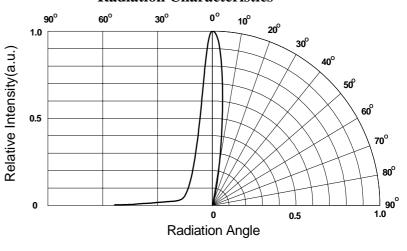

Everlight Electronics Co., Ltd. Device Number: DLE-033-B01 http\\:www.everlight.com

Prepared date:01-16-2006

Rev 1

Page: 4 of 7

Prepared by:Flourix Chen



## 333/R2C1-AQUB

#### **Packing Quantity Specification**

1.500PCS/1Bag , 5Bags/1Box

2.10Boxes/1Carton

#### **Label Form Specification**

CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks of Luminous Intensity and Forward

Voltage

HUE: Ranks of Dominant Wavelength

**REF:** Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev 1 Page: 5 of 7


Device Number: DLE-033-B01 Prepared date:01-16-2006 Prepared by:Flourix Chen



## 333/R2C1-AQUB

#### **Notes**

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. Below the zener reference voltage Vz, all the current flows through LED and as the voltage rises to Vz, the zener diode "breakdown." If the voltage tries to rise above Vz current flows through the zener branch to keep the voltage at exactly Vz.
- 5. When the LED is connected using serial circuit, if either piece of LED is no light up but current can't flow through causing others to light down. In new design, the LED is parallel with zener diode. if either piece of LED is no light up but current can flow through causing others to light up.

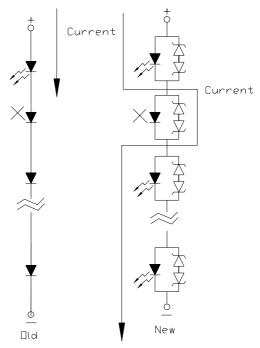

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev 1 Page: 6 of 7

Device Number: DLE-033-B01 Prepared date:01-16-2006 Prepared by:Flourix Chen



## 333/R2C1-AQUB

#### 6. Soldering Condition

Careful attention should be paid during soldering. When soldering, leave more then 3mm from solder joint to case, and soldering beyond the base of the tie bar is recommended.

Avoiding applying any stress to the lead frame while the LEDs are at high temperature particularly when soldering.

Recommended soldering conditions:

Hand Soldering		DIP Soldering		
Temp. at tip of iron	400°C Max. (30W Max.)	Preheat temp.	100°C Max. (60 sec Max.)	
Soldering time	3 sec Max.	Bath temp.	265 Max.	
Distance	3mm Min.(From solder joint to case)	Bath time.	5 sec Max.	
		Distance	3mm Min.	

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

 $http: \www.everlight.com$ 

Everlight Electronics Co., Ltd. http\\:www.everlight.com Rev 1 Page: 7 of 7

Device Number: DLE-033-B01 Prepared date:01-16-2006 Prepared by:Flourix Chen