

Vishay Siliconix

Low Voltage, Low On-Resistance, Dual DPDT/Quad SPDT Analog Switch

DESCRIPTION

The DG2788/DG2789 are monolithic CMOS analog switching products designed for high performance switching of analog signals. Combining low power, high speed, low on-resistance and small physical size, the DG2788/DG2789 are ideal for portable and battery powered applications requiring high performance and efficient use of board space.

The DG2788/DG2789 are built on Vishay Siliconix's low voltage process. An epitaxial layer prevents latchup. Breakbefore-make is guaranteed.

The switch conducts equally well in both directions when on, and blocks up to the power supply level when off. The DG2788 is configured as a dual Double Pole Double Throw switches while the DG2789 is configured as a Quad Single Pole Double Throw. The DG2789 has one control pin for all four SPDT switches and also has an enable pin that can turn all switches off.

The DG2788 and DG2789 comes in a small miniQFN-16 lead package ($2.6 \times 1.8 \times 0.75$ mm).

As a committed partner to the community and the environment, Vishay Siliconix manufactures this product with the lead (Pb)-free device terminations and is 100 % RoHS compliant.

FEATURES

- Low Voltage Operation (1.65 V to 4.3 V)
- Low On-Resistance r_{ON}: 0.4 Ω Typ. at 2.7 V
- Fast Switching: $t_{ON} = 47 \text{ ns}$ $t_{OFF} = 15 \text{ ns}$
- miniQFN-16 Package
- Latch-Up Current > 300 mA (JESD78)






BENEFITS

- Reduced Power Consumption
- High Accuracy
- Reduce Board Space
- TTL/1.8 V Logic Compatible
- · High Bandwidth

APPLICATIONS

- Cellular Phones
- · Speaker Headset Switching
- · Audio and Video Signal Routing
- PCMCIA Cards
- · Battery Operated Systems

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

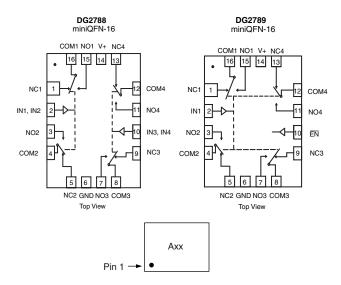

Device Marking:	Axx for DG2788
	Bxx for DG2789
xx = Date/Lot Tra	ceability Code
Note: Pin 1 has lo	ong lead

TRUTH TABLE DG2788				
Logic	NC1, 2, 3 and 4	NO1, 2, 3 and 4		
0	ON	OFF		
1	OFF	ON		

TRUTH TABLE DG2789					
EN Logic	IN Logic	NC1, 2, 3 and 4	NO1, 2, 3 and 4		
0	0	ON	OFF		
0	1	OFF	ON		
1	Х	OFF	OFF		

ORDERING INFORMATION				
Temp Range	Package	Part Number		
- 40 to 85 °C	miniQFN-16	DG2788DN-T1-E4 DG2789DN-T1-E4		

DG2788/DG2789

Vishay Siliconix



ABSOLUTE MAXIMUM RATINGS $T_A = 25$ °C, unless otherwise noted						
Parameter		Symbol	Limit	Unit		
Defended to OND	V+		- 0.3 to 5.0	V		
Reference to GND	IN, COM, NC, NO ^a		- 0.3 to (V+ + 0.3)	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		
Current (Any terminal except NO, NC or COM)			30			
Continuous Current (NO, NC, or COM)			± 300	mA		
Peak Current (Pulsed at 1 ms, 10 % duty cycle)			± 500	1		
Storage Temperature (D Suffix)			- 65 to 150	°C		
Package Solder Reflow Conditions ^d	miniQFN-16		250]		
Power Dissipation (Packages) ^b	miniQFN-16 ^c	525		mW		

Notes:

- a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- b. All leads welded or soldered to PC Board.
- c. Derate 6.6 mW/°C above 70 °C
- d. Manual soldering with iron is not recommended for leadless components. The miniQFN-16 is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper lip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.





SPECIFICATIONS (Test Conditions		Limits			
		Otherwise Unless Specified	_		- 40 to 85 °C		
Parameter	Symbol	$V+ = 3 V, \pm 10 \%, V_{IN} = 0.5 \text{ or } 1.4 V^{e}$	Temp ^a	Min ^b	Typ ^c	Max ^b	Unit
Analog Switch			1 1		ı	I	
Analog Signal Range ^d	V_{NO}, V_{NC}, V_{COM}		Full	0		V+	V
		$V+ = 2.7 \text{ V}, V_{COM} = 0.5 \text{ V}, I_{NO}, I_{NC} = 100 \text{ mA}$	Deam		0.4	0.5	
On-Resistance	r _{ON}	$V+ = 2.7 \text{ V}, V_{COM} = 1.5 \text{ V}, I_{NO}, I_{NC} = 100 \text{ mA}$	Room		0.33	0.5	
			Full			0.56	0
r _{ON} Flatness ^d	r _{ON} Flatness	V+ = 2.7 V, V _{COM} = 0 to V+,	Room		0.1	0.15	Ω
r _{ON} Match ^d	Δr _{ON}	I _{NO} , I _{NC} = 100 mA	Room		0.05		
	I _{NO(off)} ,		Room	- 1		1	
Switch Off Lookage Current	I _{NC(offF)}	$V+ = 3.3 V, V_{NO}, V_{NC} = 0.3 V/3.0 V,$	Full	- 10		10	
Switch Off Leakage Current		V _{COM} = 3.0 V/0.3 V	Room	- 1		1	nA
	ICOM(off)		Full	- 10		10	
Channel-On Leakage Current	I _{COM(on)}	$V+ = 3.3 \text{ V}, V_{NO}, V_{NC} = V_{COM} = 0.3 \text{ V}/3.0 \text{ V}$	Room Full	- 1 - 10		1 10	
Digital Control	, ,		Full	- 10		10	
Input High Voltage	V _{INH}		Full	1.4			
Input Low Voltage	V _{INL}		Full			0.5	V
Input Capacitance	C _{in}		Full		6		pF
Input Current	I _{INL} or I _{INH}	V _{IN} = 0 or V+	Full	- 1		1	<u>.</u> μΑ
Dynamic Characteristics							
Turn-On Time	t _{ON}	V_{NO} or V_{NC} = 1.5 V, R_L = 50 Ω , C_L = 35 pF	Romm Full		47	72 75	
Turn-Off Time	t _{OFF}		Room Full		15	43 45	ns
Break-Before-Make Time	t _d		Full	1			
Charge Injection ^d	Q _{INJ}	$C_L = 1 \text{ nF, } V_{GEN} = 0 \text{ V, } R_{GEN} = 0 \Omega$	Room		87		рС
		$R_L = 50 \Omega$, $C_L = 5 pF$, $f = 100 kHz$			- 69		
Off-Isolation ^d OIR	OIRR	$R_L = 50 \Omega$, $C_L = 5 pF$, $f = 1 MHz$	Room		- 49		
Crosstalk ^{d, f}		$R_L = 50 \Omega$, $C_L = 5 pF$, $f = 100 kHz$			- 106		dB
	X _{TALK}	$R_L = 50 \Omega$, $C_L = 5 pF$, $f = 1 MHz$			- 96		
d	C _{NO(off)}		Room		81		
N _O , N _C Off Capacitance ^d	C _{NC(off)}		Room		81		_
CNO	C _{NO(on)}	f = 1 MHz	Room		186		pF
اند یا با	` ′				400		
Channel-On Capacitance ^d	C _{NC(on)}		Room		186		
Channel-On Capacitance ^d Power Supply	C _{NC(on)}		Room		186		
	C _{NC(on)}	V _{IN} = 0 or V+	Room	2.7	186	3.3	V

DG2788/DG2789

Vishay Siliconix



	Test Conditions Otherwise Unless Specified			Limits - 40 to 85 °C			
Parameter	Symbol	$V+ = 4.3 \text{ V}, V_{IN} = 0.5 \text{ or } 1.6 \text{ V}^e$	Temp ^a	Min ^b	Typ ^c	Max ^b	Unit
Analog Switch							•
Analog Signal Range ^d	V_{NO}, V_{NC}, V_{COM}		Full	0		V+	V
		V+ = 4.3 V, V _{COM} = 0.9 V, I _{NO} , I _{NC} = 100 mA	_		0.32	0.45	
On-Resistance	r _{ON}	$V+ = 4.3 \text{ V}, V_{COM} = 2.5 \text{ V}, I_{NO}, I_{NC} = 100 \text{ mA}$	Room		0.27	0.45	
			Full			0.5	
r _{ON} Flatness ^d	r _{ON} Flatness	$V+ = 4.3 \text{ V}, V_{COM} = 0 \text{ to } V+,$	Room		0.1	0.15	Ω
r _{ON} Match ^d	Δr _{ON}	I_{NO} , $I_{NC} = 100 \text{ mA}$	Room		0.03		
Switch Off Leakage	I _{NO(off)} , I _{NC(offF)}	$V+ = 4.3 \text{ V}, V_{NO}, V_{NC} = 0.3 \text{ V} / 4.0 \text{ V},$ $V_{COM} = 4.0 \text{ V} / 0.3 \text{ V}$	Room Full	-10 - 100		10 100	nA
Current ^d	I _{COM(off)}		Room Full	- 10 - 100		10 100	
Channel-On Leakage Current ^d	I _{COM(on)}	$V+ = 4.3 \text{ V}, V_{NO}, V_{NC} = V_{COM} = 3.0 \text{ V} / 4.0 \text{ V}$	Room Full	- 10 - 100		10 100	
Digital Control					I.	1	•
Input High Voltage	V _{INH}		Full	1.6			V
Input Low Voltage	V _{INL}		Full			0.5	V
Input Capacitance	C _{in}		Full		6		pF
Input Current	I _{INL} or I _{INH}	V _{IN} = 0 or V+	Full	- 1		1	μΑ
Dynamic Characteristics							
Charge Injection ^d	Q_{INJ}	C_L = 1 nF, V_{GEN} = 0 V, R_{GEN} = 0 Ω	Room		105		рC
N. N. Off Compaignment	C _{NO(off)}		Room		79		
No No Off Capacitance ⁴	C _{NC(off)}		Room		79		pF
Channel-On Capacitance ^d	C _{NO(on)}	f = 1 MHz	Room		183		
	C _{NC(on)}		Room		183		
Power Supply							
Power Supply Range	V+					4.3	V
Power Supply Current	I+	$V_{IN} = 0$ or $V+$	Full			1.0	μΑ


Notes:

- a. Room = 25 $^{\circ}$ C, Full = as determined by the operating suffix.
- b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- c. Typical values are for design aid only, not guaranteed nor subject to production testing.
- d. Guarantee by design, not subjected to production test.
- e. V_{IN} = input voltage to perform proper function.
- f. Crosstalk measured between channels.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




TYPICAL CHARACTERISTICS $T_A = 25$ °C, unless otherwise noted

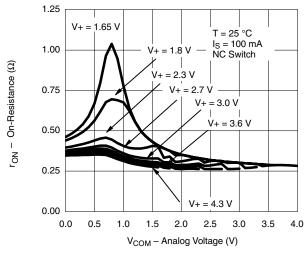


 $r_{\mbox{\scriptsize ON}}$ vs. $V_{\mbox{\scriptsize COM}}$ and Supply Voltage

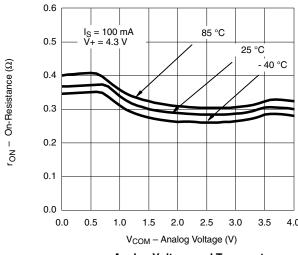


 $r_{\mbox{\scriptsize ON}}$ vs. Analog Voltage and Temperature

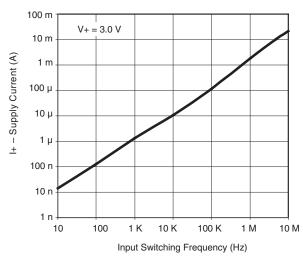


Supply Current vs. Input Switching Frequency

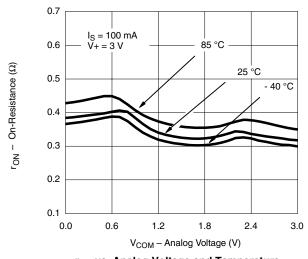

r_{ON} vs. Analog Voltage and Temperature

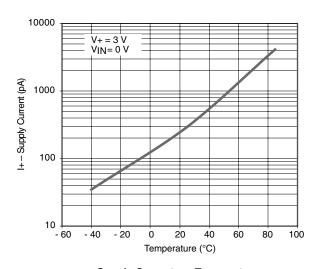

Supply Current vs. Temperature

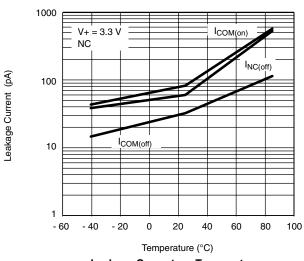



Leakage Current vs. Temperature

Vishay Siliconix


VISHAY

TYPICAL CHARACTERISTICS $T_A = 25$ °C, unless otherwise noted

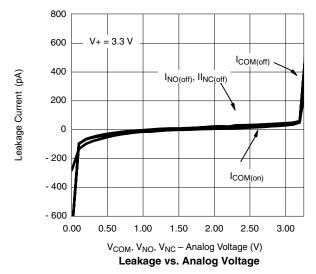


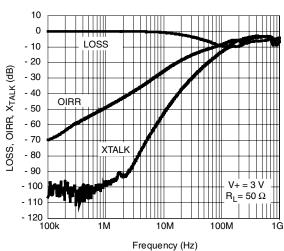


Insertion Loss, Off-Isolation Crosstalk vs. Frequency

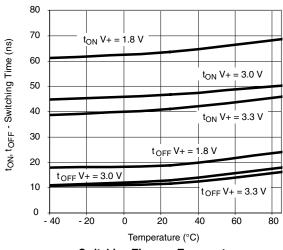

Switching Time vs. Temperature

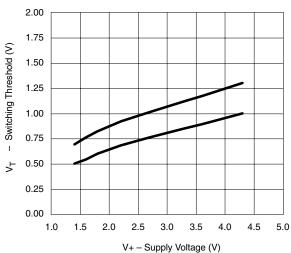


Switching Threshold vs. Supply Voltage

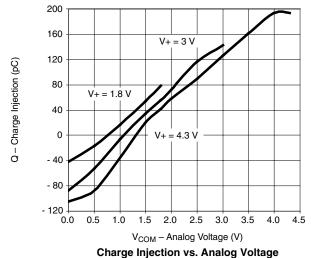




TEST CIRCUITS

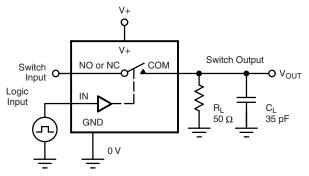

C_L (includes fixture and stray capacitance)

$$V_{OUT} \ = \ V_{COM} \left(\frac{R_L}{R_L + R_{ON}} \right)$$

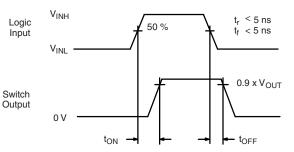

Logic "1" = Switch On Logic input waveforms inverted for switches that have the opposite logic sense.

Figure 1. Switching Time

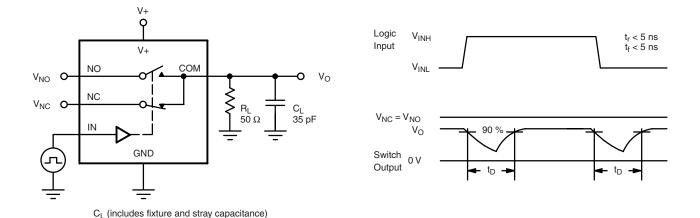


Figure 2. Break-Before-Make Interval

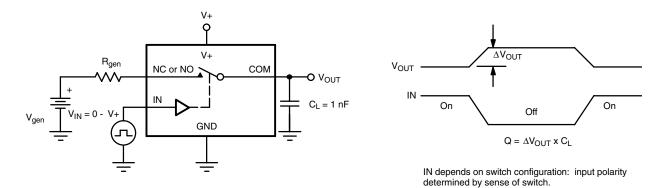


Figure 3. Charge Injection

Vishay Siliconix

VISHAY

TEST CIRCUITS

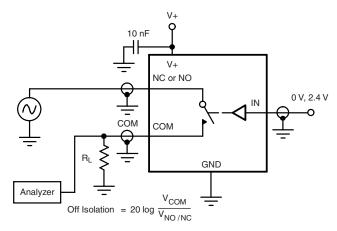


Figure 4. Off-Isolation

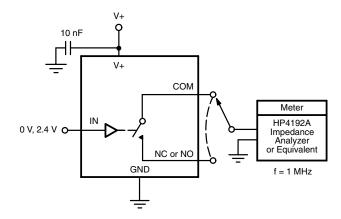


Figure 5. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see http://www.vishay.com/ppg?73863.



Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Revision: 18-Jul-08

Document Number: 91000 www.vishay.com