



March 2008



- Pletronics' SM76H Series is a quartz crystal controlled precision square wave generator with a CMOS output. Made from SM77H devices.
- S-Pkg is Solder pad compatible with the Epson SG615 and SG8002J and many other 9x14mm plastic J lead packages.
- FR4 base with an SM77H series oscillator.
- Tape and Reel or cut tape packaging is available.
- 0.8 to 70 MHz
- 9.04mm x 8.23mm package
- Enable/Disable or Standby Function
- Disable function includes low standby power mode
- · Low Jitter
- Package changed in 2008

Pletronics Inc. certifies this device is in accordance with the RoHS 6/6 (2002/95/EC) and WEEE (2002/96/EC) directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's

Weight of the Device: 0.40 grams

Moisture Sensitivity Level: 1 As defined in J-STD-020C

Second Level Interconnect code: e4

Absolute Maximum Ratings:

Parameter	Unit
V _{cc} Supply Voltage	-0.5V to +7.0V
Vi Input Voltage	-0.5V to V _{CC} + 0.5V
Vo Output Voltage	-0.5V to V _{CC} + 0.5V

Thermal Characteristics

The maximum die or junction temperature is 155°C

The thermal resistance junction to board is 60 to 100°C/Watt depending on the solder pads, ground plane and construction of the PCB.



March 2008

Part N	lumk	er:					_	
SM76	45	Н	Ε	W	- 50.0M	-XX		Part Marking:
							Packaging code or blank T250 = 250 per Tape and Reel T500 = 500 per Tape and Reel T1K = 1000 per Tape and Reel	PLE SM76 FF.FFF M • YMDXX
							Frequency in MHz	
							Supply Voltage V _{cc} W = 2.5V <u>+</u> 10%	or
							Optional Enhanced OTR Blank = Temp. range -10 to +70°C E = Temp. range -40 to +85°C	PLE SM77 FF.FFF M • YMDXX
							Series Model	
							Frequency Stability 45 = ± 50 ppm 44 = ± 25 ppm 20 = ± 20 ppm	
							Series Model	

Marking Legend:

PLE = Pletronics

FF.FFF M = Frequency in MHZ

YMD = Date of Manufacture (year-month-day)

All other marking is internal factory codes

Specifications such as frequency stability, supply voltage and operating temperature range, etc. are not identified from the marking. External packaging labels and packing list will correctly identify the ordered Pletronics part number.

Codes for Date Code YMD

Code	6	7	8	9	0	1	2
Year	2006	2007	2008	2009	2010	2011	2012

Code)	Α	В	С	D	Е	F	G	Н	J	K	L	M
Montl	h J.	AN	FEB	MA	R AP	R MA	Y JUN	l JUL	AUG	SEP	OCT	NOV	DEC
Code	1	:	2	3	4	5	6	7	8	9	Α	В	С
Day	1		2	3	4	5	6	7	8	9	10	11	12
Code	D		E	F	G	Н	J	K	L	М	N	Р	R
Day	13	1	14	15	16	17	18	19	20	21	22	23	24
Code	Т	ı	U	٧	W	Х	Υ	Z					
Day	25	2	26	27	28	29	30	31			_		

Legacy Part Numbers:

- S' Denoted Symmetry of 45%/55% at 50% of V_{CC}. This is now the standard Duty Cycle and is no longer needed in the part number. We will still support part numbers with the 'S'. For example SM7645HW and SM7645HSW describe the same specifications and can be used interchangeably by the customer.
- -30 Denoted Output Load other than the standard 15 pF. Data sheets now reflect the specifications at all available loads so this load designation is no longer needed. We will still support part numbers with this load designation.



March 2008

Electrical Specification for 2.50V $\pm 10\%$ over the specified temperature range

Item	Min	Max	Unit	Condition		
Frequency Range	0.8	69.9	MHZ			
Frequency Accuracy "45"	-50	-50 +50		For all supply voltages, load changes, aging fo		
"44 "	-25	+25		1 year, shock, vibration and temperatures		
" 20 "	-20	+20				
Output Waveform		CMOS				
Output High Level	90	-	%	of V _{CC} (See load circuit)		
Output Low Level	1	10	%			
Output Symmetry	45	55	%	at 50% point of V _{CC} (See load circuit)		
Jitter	-	0.6	pS RMS	12 KHz to 20 MHZ from the output frequency		
	1	2.5	pS RMS	10 Hz to 1 MHZ from the output frequency		
Enable/Disable Internal Pull-up	50	-	Kohm	to V _{CC}		
V disable	1	30	%	of V _{CC} applied to pin 1		
V enable	70	-	%			
Output leakage V _{OUT} = V _{CC}	-10	+10	uA	Pin 1 low, device disabled		
V _{OUT} = 0V	-10	+10	uA			
Standby Current I _{cc}	-	3	uA			
Enable time	-	100	nS	Time for output to reach a logic state		
Disable time	-	100	nS	Time for output to reach a high Z state		
Start up time	-	3	mS	Time for output to reach specified frequency		
Operating Temperature Range	-10	+70	°C	Standard Temperature Range		
	-40	+85	°C	Extended Temperature Range "E" Option		
Storage Temperature Range	-55	+125	°C			




March 2008

Electrical Specification for 2.50V ±10% over the specified temperature range

Item	Тур	Max	Unit	Condition	
Output T _{RISE} and T _{FALL}	-	7	nS	All	C _{LOAD} = 15 pF
	-	9	nS	< 35 MHZ	C _{LOAD} = 30 pF
	-	12	nS	≥ 35 MHZ	
V _{CC} Supply Current (I _{CC})	-	6	mA	< 8 MHZ	C _{LOAD} = 15 pF
	-	8	mA	<u>></u> 8 MHZ and < 16 MHZ	10% to 90% of V _{CC} See Load Circuit
	-	11	mA	≥ 16 MHZ and < 35 MHZ	
	-	29	mA	≥ 35 MHZ	
	-	7	mA	< 8 MHZ	C _{LOAD} = 30 pF
	-	8	mA	<u>></u> 8 MHZ and < 16 MHZ	10% to 90% of V _{cc} See Load Circuit
	-	10	mA	≥ 16 MHZ and < 35 MHZ	
	-	41	mA	≥ 35 MHZ	

Specifications with Pad 1 E/D open circuit


Typical phase noise plot for 5 oscillators at different output frequencies.

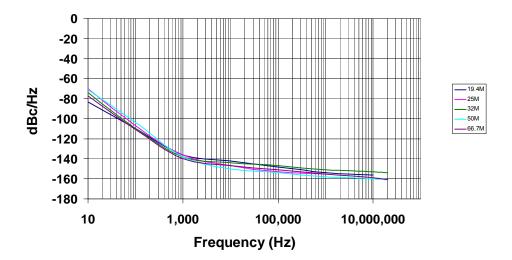



March 2008

Load Circuit and Test Waveform

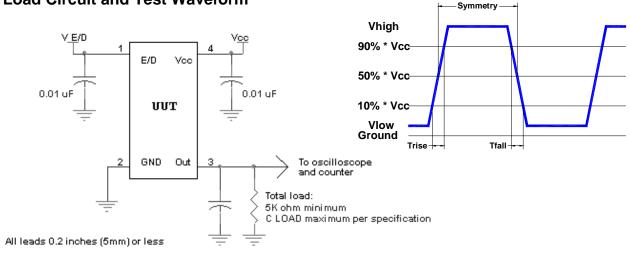

Reliability: Environmental Compliance

Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002, Condition B
Vibration	MIL-STD-883 Method 2007, Condition A
Solderability	MIL-STD-883 Method 2003
Thermal Shock	MIL-STD-883 Method 1011, Condition A

ESD Rating

Model	Minimum Voltage	Conditions		
Human Body Model	1500	MIL-STD-883 Method 3115		
Charged Device Model	1000	JESD 22-C101		

Package Labeling

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Courier New Bar code is 39-Full ASCII


 Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Arial

RoHS Compliant
2nd LvL Interconnect
Category=e4
Max Safe Temp=245C for 10s 2X Max




March 2008

Mechanical:



Label: Laser marked on the ceramic package metal cover

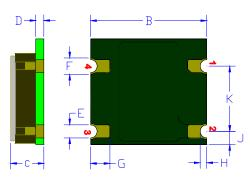

FR4 PCB Base: Solder masked All via holes tented on bottom Copper Clad ½ oz. Typical Gold plated 0.02 µinch (0.5 µm)

Pin 3 Ground plane is typical


Not to scale


	Inches	mm
Α	0.324 <u>+</u> 0.003	8.23 <u>+</u> 0.07
В	0.356 <u>+</u> 0.005	9.04 <u>+</u> 0.13
C	0.135 <u>+</u> 0.005	3.43 <u>+</u> 0.13
D ¹	0.062	1.57
E ¹	0.050	1.27
F¹	0.050	1.27
G¹	0.059	1.50
H ¹	0.020	0.51
J ¹	0.040	1.02
K ¹	0.200	5.08

Pad	Function	Note
1	Output Enable/Disable	When this pad is not connected the oscillator shall operate. When this pad is logic low the output will be inhibited (high impedance state.) Recommend connecting this pad to $V_{\rm CC}$ if the oscillator is to be always on.
2	Ground (GND)	
3	Output	
4	Supply Voltage (V _{cc})	Recommend connecting appropriate power supply bypass capacitors as close as possible.

Layout and application information

For Optimum Jitter Performance, Pletronics recommends:





do not layout near a large magnetic field such as a high frequency switching power supply

do not place near piezoelectric buzzers or mechanical fans.



¹ Typical dimension



March 2008

Mechanical (obsolete version):

The cover is no longer being supplied over this part. This part is made with a hermetically sealed SM77H series oscillator. This part is now exposed.


The cover has been deleted, the cover was causing problems with the newer high temperature RoHS lead free processes. The cover purpose was only cosmetic.


All parts ordered in 2008 will be made in the new fashion.

There is no change in electrical properties.

Pletronics does recommend that all designs should transition to the SM77H ceramic part. This is the base part of the SM76H.








1 µinch (25 µm) typical

Label:
White Kapton with Black Letters
-or-Laser marked lettering

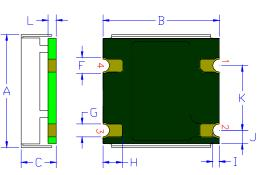

FR4 PCB Base: Solder masked All via holes tented on bottom Copper Clad ½ oz. Typical Gold plated 0.02 µinch (0.5 µm)

Pin 3 Ground plane is typical

Not to scale¹ Typical dimension


	Inches	mm
Α	0.351 <u>+</u> 0.003	8.91 <u>+</u> 0.07
В	0.356 <u>+</u> 0.005	9.04 <u>+</u> 0.13
С	0.103 <u>+</u> 0.005	2.62 <u>+</u> 0.13
D ¹	0.324	8.23
E ¹	0.316	8.03
F¹	0.050	1.27
G ¹	0.040	1.02
H ¹	0.059	1.50
l ¹	0.020	0.51
J ¹	0.040	1.02
K ¹	0.200	5.08
L ¹	0.026 typical	0.66

- The package is not hermetically sealed.
- The sides are intentionally left open to permit cleaning material to freely flow in the package, thus minimizing the accumulation of contaminants during cleaning processes.
- The internal part of the package must be thoroughly dry before operating.



March 2008

Reflow Cycle (typical for lead free processing)

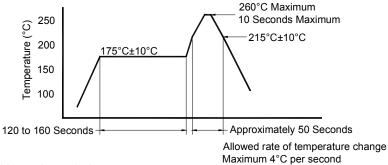

The part may be reflowed 2 times without degradation.


Tape and Reel: available for quantities of 250 to 1000 per reel, cut tape for < 250


Constant Dimensions Table 1									
Tape Size	D0	D1 Min	E1	P0	P2	S1 Min	T Max	T1 Max	
8mm		1.0			2.0				
12mm	1.5	1.5	1.75	4.0	<u>+</u> 0.05				
16mm	+0.1 -0.0	1.5	<u>+</u> 0.1	<u>+</u> 0.1	2.0	0.6	0.6	0.1	
24mm		1.5			<u>+</u> 0.1				

Variable Dimensions Table 2									
Tape Size	B1 Max	E2 Min	F	P1	T2 Max	W Max	Ao, Bo & Ko		
24 mm	9.88	22.25	11.5 <u>+</u> 0.1	16.0 <u>+</u> 0.1	3.22	24.3	Note 1		

Note 1: Embossed cavity to conform to EIA-481-B

Dimensions in mm



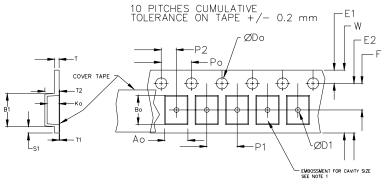

USER DIRECTION OF UNREELING ----

		REE			
Α	inches	7.0	10.0	13.0	
	mm	177.8	254.0	330.2	
В	inches	2.50	4.00	3.75	
	mm	63.5	101.6	95.3	Tape Width
С	mm	13	vviatri		
D	mm			24.4 +2.0 -0.0	24.0

Reel dimensions may vary from the above

www.pletronics.com 425-776-1880 8

Not to scale



March 2008

IMPORTANT NOTICE

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

Contacting Pletronics Inc.

Pletronics Inc. Tel: 425-776-1880 19013 36th Ave. West Fax: 425-776-2760

Lynnwood, WA 98036-5761 USA E-mail: ple-sales@pletronics.com

URL: www.pletronics.com

Copyright © 2007, 2008 Pletronics Inc.