EXTENDED REACH MULTI-RATE OC-48/STM-16 LR-2/L-16.2 SFP TRANSCEIVERS WITH DIGITAL DIAGNOSTICS

TRPE48KE2-E2 Multi-rate

Product Description

The TRPE48KE2-E2 SFP series of multi-rate fiber optic transceivers with digital diagnostics monitoring functionality provide a quick and reliable interface for extended reach (LR-2) applications. Diagnostics monitoring functionality (alarm and warning features) is integrated into the design via an I²C serial interface per the Multi-Source Agreement (MSA) SFF-8472, Rev. 9.4.


Products under this series are compatible with SONET/SDH standards for OC-48/STM-16 (2.488Gb/s) LR-2/L-16.2 extended reach applications, OC-3/STM-1 (156Mb/s) and OC-12/STM-4 (622Mb/s) SR/I-1 and I-4 short reach applications; Gigabit Ethernet LX (1.25Gb/s) applications per IEEE 802.3; and Fibre Channel 200-SM-LC-L (2.125Gb/s) and 100-SM-LC-L (1.062Gb/s) applications per FC-PI standards. The transceivers support data rates ranging from 2.67Gb/s down to 125Mb/s. All modules satisfy Class I Laser Safety requirements in accordance with the U.S. FDA/CDRH and international IEC-60825 standards.

The TRPE48KE2-E2 multi-rate transceivers connect to standard 20-pad SFP connectors for hot plug capability. This allows the system designer to make configuration changes or maintenance by simply plugging in different types of transceivers without removing the power supply from the host system.

The transceivers have colored bail-type latches, which offer an easy and convenient way to release the modules. The latch is compliant with the SFP MSA.

The transmitter and receiver DATA interfaces are AC-coupled internally. LV-TTL Transmitter Disable control input and Loss of Signal output interfaces are also provided.

The transceivers operate from a single +3.3V power supply over operating case temperature range of -5° C to $+70^{\circ}$ C (Commercial) or -5° C to $+85^{\circ}$ C (Extended). The housing is made of metal for EMI immunity.

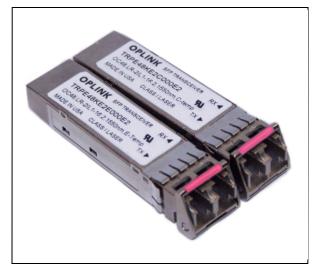

Features

- ☑ Distance up to 100km with Single Mode Fiber
- ☑ Operating Bit Rate of 125Mb/s to 2.67Gb/s
- ☑ Compatible with SFP MSA
- ☑ Compatible with SONET/SDH OC-48/STM-16 (2.488Gb/s) LR-2/L-16.2 Applications
- ☑ Compatible with Gigabit Ethernet LX
- ☑ Compatible with Fibre Channel 200-SM-LC-L and 100-SM-LC-L
- ☑ Digital Diagnostics through Serial Interface
- ☑ Internal Calibration for Digital Diagnostics
- ☑ APD Receiver
- ☑ Eye Safe (Class I Laser Safety)
- ☑ Optical Link Power Budget of 31dB Minimum
- ☑ Hot-pluggable
- ☑ TX Fault & Loss of Signal Outputs
- ☑ TX Disable Input

Absolute Maximum Ratings

Parameter Storage Temperature		Symbol	Symbol Minimum		Units
		$T_{\scriptscriptstyle ST}$	- 40	+ 85	°C
Operating Case Temperature ¹	Commercial	- 5		+ 70	96
	Extended	T_{OP}	- 5	+ 85	°C
Supply Voltage		V_{cc}	0	+ 5.0	V
Maximum Input Optical Power (30 seconds max.)		P _{in,max}	-	+ 3.0	dBm
Input Voltage		$V_{_{I\!N}}$	0	V_{cc}	V
¹ Measured on top side of SFP modu	le at the front center vent	hole of the cage.			





Transmitter Performance Characteristics (Over Operating Case Temperature. $V_{cc} = 3.13$ to 3.47V)

Parameter		Symbol	Minimum	Typical	Maximum	Units
Operating Data Rate		В	0.125	-	2.67	Gb/s
Average Optical Output Power (coupled into single mode fiber), 50% duty cycle		$P_{_{O}}$	0	-	+ 5.0	dBm
Extinction Ratio		Phi /Plo	8.2	-	-	dB
Center Wavelength		λ_{c}	1500	1550	1580	nm
Spectral Width (- 20dB)		$\Delta\lambda_{ extit{RMS}}$	-	-	1.0	nm
Side Mode Suppression Ra	Side Mode Suppression Ratio		30	-	-	dB
Optical Rise/Fall Time (20%	% to 80%)	t_r , t_f	-	-	0.16	ns
Relative Intensity Noise		RIN		-	- 117	dB/Hz
Jitter Generation	OC-48	JG	-	-	0.07	Ulp-p
Dispersion Penalty ¹		-		-	2.0	dB
Optical Output Eye	Compliant with Telcordia GR-253-CORE and ITU-T Recommendation G.957					
Specified at 1600ps/nm dispersion over G.652/G.654 fiber with center wavelength range of 1500-1580nm						

Receiver Performance Characteristics (Over Operating Case Temperature. $V_{cc} = 3.13$ to 3.47V)

Parameter Operating Data Rate		Symbol	Minimum	Typical	Maximum	Units Gb/s	
		В	0.125	-	2.67		
Receiver Sensitivity (10 ⁻¹⁰ BER) ¹	OC-3/12/48, 2.67Gb/s	Pmin	- 31.0	-	-	dBm	
Receiver Sensitivity (10 ⁻¹² BER) ²	2.125Gb/s, 1.25Gb/s, 1.062Gb/s, 0.125Gb/s	Pmin	- 28.0	-	-	dBm	
Maximum Input Optical Power (10 -10 BER)		Pmax	- 8.0	-	-	dBm	
LOST	Increasing Light Input	Plos+	-	-	- 31.0	ID	
LOS Thresholds	Decreasing Light Input	Plos-	- 42.0	-	-	dBm	
LOS Timeiro en Dolono	Increasing Light Input	t_loss_off	-	-	100	μs	
LOS Timing Delay	Decreasing Light Input	t_loss_on	2.3	-	100		
LOS Hysteresis		-	0.5³	1.5	-	dB	
Wavelength of Operation		λ	1260	-	1600	nm	
Receiver Reflectance		-	-	-	- 27.0	dB	
184	D.C.	1		1		1	

¹Measured with 2²³-1 PRBS.

Laser Safety: All transceivers are Class I Laser products per FDA/CDRH and IEC-60825 standards. They must be operated under specified operating conditions.





Oplink Communications, Inc.

DATE OF MANUFACTURE:

MANUFACTURED IN THE USA
This product complies with
21 CFR 1040.10 and 1040.11
Meets Class I Laser Safety Requirements

²Measured with 2⁷-1 PRBS.

³For OC-3, Minimum Hysteresis is 0.2dB.

Transmitter Electrical Interface (Over Operating Case Temperature. V_{cc} = 3.13 to 3.47V)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Input Voltage Swing (TD+ & TD-) ¹	$V_{{\scriptscriptstyle PP\text{-}DIF}}$	0.35	-	1.75	V
Input HIGH Voltage (TX Disable) ²	$V_{_{I\!H}}$	2.0	-	V_{cc}	V
Input LOW Voltage (TX Disable) ²	$V_{_{I\!L}}$	0	-	0.8	V
Output HIGH Voltage (TX Fault) ³	$V_{_{\mathrm{OH}}}$	2.0	-	$V_{CC} + 0.3$	٧
Output LOW Voltage (TX Fault) ³	$V_{\scriptscriptstyle OL}$	0	-	0.8	V

¹Differential peak-to-peak voltage.

Receiver Electrical Interface (Over Operating Case Temperature. $V_{cc} = 3.13$ to 3.47V)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Output Voltage Swing (RD+ & RD-)1	$V_{_{PP\text{-}DIF}}$	0.40	-	1.75	V
Output HIGH Voltage (LOS) ²	V_{OH}	V _{CC} - 1.3	-	V _{CC} + 0.3	V
Output LOW Voltage (LOS) ²	$V_{\scriptscriptstyle OL}$	0	-	0.5	V


¹Differential peak-to-peak voltage across external 100 Ω load.


Electrical Power Supply Characteristics (Over Operating Case Temperature. $V_{cc} = 3.13$ to 3.47V)

Parameter	Symbol	Minimum	Typical	Maximum	Units
Supply Voltage	V_{cc}	3.13	3.3	3.47	V
Supply Current	I_{cc}	-	175	300	mA

Module Definition

MOD_DEF(0) MOD_DEF(1) pin 6 pin 5		MOD_DEF(2) pin 4	Interpretation by Host
TTL LOW	SCL	SDA	Serial module definition protocol

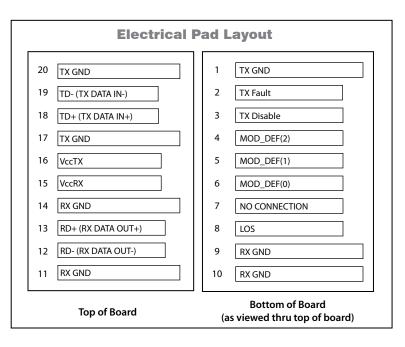


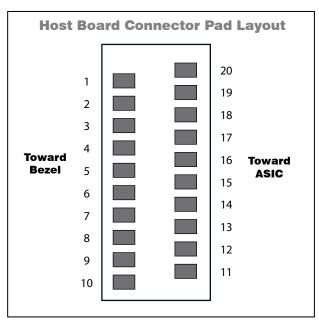

²There is an internal 4.7 to $10k\Omega$ pull-up resistor to VccT.

 $^{^{3}}$ Open collector compatible, 4.7 to $10k\Omega$ pull-up resistor to Vcc (Host Supply Voltage).

²Open collector compatible, 4.7 to $10k\Omega$ pull-up resistor to Vcc (Host Supply Voltage).

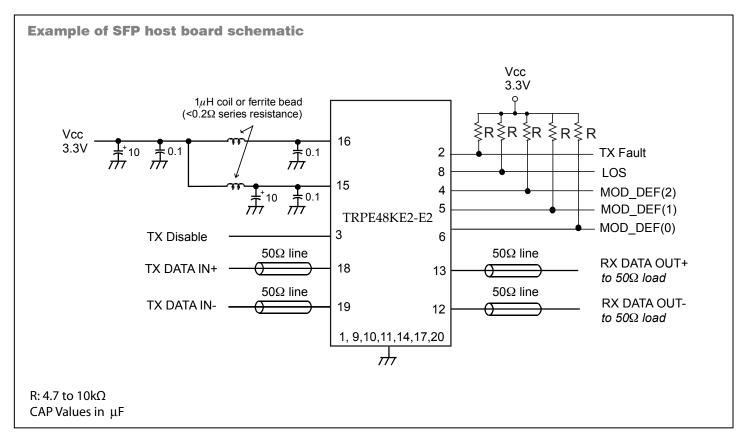

Application Notes

Electrical interface: All signal interfaces are compliant with the SFP MSA specification. The high speed DATA interface is differential AC-coupled internally with 1 μ F and can be directly connected to a 3.3V SERDES IC. All low speed control and sense output signals are open collector TTL compatible and should be pulled up with a 4.7 - 10k Ω resistor on the host board

Loss of Signal (LOS): The Loss of Signal circuit monitors the level of the incoming optical signal and generates a logic HIGH when an insufficient photocurrent is produced.

TX_Fault: The output indicates LOW when the transmitter is operating normally, and HIGH with a laser fault including laser end-of-life. TX Fault is an open collector/drain output and should be pulled up with a $4.7 - 10 \mathrm{k}\Omega$ resistor on the host board. TX Fault is non-latching (automatically deasserts when fault goes away).

TX_Disable: When the TX Disable pin is at logic HIGH, the transmitter optical output is disabled (less than -45dBm).

Serial Identification and Monitoring: The module definition of SFP is indicated by the three module definition pins, MOD_DEF(0), MOD_DEF(1) and MOD_DEF(2).

Upon power up, MOD_DEF(1:2) appear as NC (no connection), and MOD_DEF(0) is TTL LOW. When the host system detects this condition, it activates the serial protocol (standard two-wire I²C serial interface) and generates the serial clock signal (SCL). The positive edge clocks data into the EEPROM segments of the SFP that are not write protected, and the negative edge clocks data from the SFP.


The serial data signal (SDA) is for serial data transfer. The host uses SDA in conjunction with SCL to mark the startand end of serial protocol activation. The supported monitoring functions are internal temperature, supply voltage, bias current, transmitter power, average receiver signal, all alarms and warnings and software monitoring of TX Fault/LOS. The device is internally calibrated.

The data transfer protocol and the details of the mandatory and vendor specific data structures are defined in the SFP MSA, and SFF-8472, Rev. 9.4.

Power supply and grounding: The power supply line should be well-filtered. All $0.1\mu\text{F}$ power supply bypass capacitors should be as close to the transceiver module as possible.



Package Outline

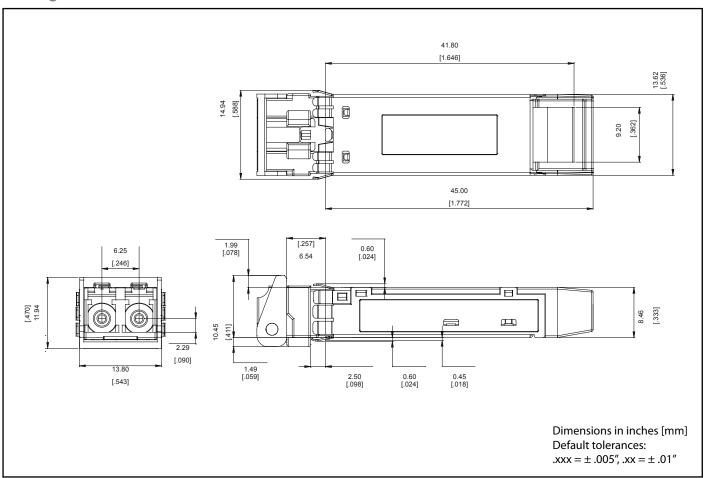

Ordering Information

Part Number	Operating Temperature	Latch Color	Nominal Wavelength	SONET/SDH Standards	Distance ¹	
TRPE48KE2C000E2	- 5°C to +70°C	Fuchsia	1550nm DFB	LR-2/L-16.2	100km	
TRPE48KE2E000E2	- 5°C to +85°C	Fuciisia	ו וווווווווווווווווווווווווווווווווווו	LK-2/L-10.2	TOOKIII	
¹ This is target distance to be used for classification and not for specification, per Telcordia GR-253-CORE/ITU-T Recommendation G.957.						

Oplink Communications, Inc. reserves the right to make changes in equipment design or specifications without notice. Information supplied by Oplink Communications, Inc. is believed to be accurate and reliable. However, no responsibility is assumed by Oplink Communications, Inc. for its use nor for any infringements of third parties, which may result from its use. No license is granted by implication or otherwise under any patent right of Oplink Communications, Inc. © 2006, Oplink Communications, Inc.