# N-channel TrenchMOS logic level FET

Rev. 01 — 16 June 2009

**Product data sheet** 

# 1. Product profile

# 1.1 General description

Logic level N-channel enhancement mode Field-Effect Transistor (FET) in a plastic package using TrenchMOS technology. This product is designed and qualified for use in industrial and communications applications.

### 1.2 Features and benefits

- High efficiency due to low switching and conduction losses
- Suitable for logic level gate drive sources

## 1.3 Applications

- Class-D amplifiers
- DC-to-DC converters

- Motor control
- Server power supplies

### 1.4 Quick reference data

Table 1. Quick reference

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
$V_{DS}$	drain-source voltage	$T_j \ge 25 \text{ °C}; T_j \le 150 \text{ °C}$		-	-	25	V
I <sub>D</sub>	drain current	$T_{mb}$ = 25 °C; $V_{GS}$ = 10 V; see <u>Figure 1</u> ;	[1]	-	-	- 25 · · · · · · · · · · · · · · · · · ·	Α
P <sub>tot</sub>	total power dissipation	T <sub>mb</sub> = 25 °C; see <u>Figure 2</u>		-	-		W
Dynamic	characteristics						
$Q_{GD}$	gate-drain charge	$V_{GS} = 4.5 \text{ V}; I_D = 10 \text{ A};$ $V_{DS} = 12 \text{ V}; \text{ see } \underline{\text{Figure 14}};$ $\text{see } \underline{\text{Figure 15}}$		-	9.2	-	nC
Q <sub>G(tot)</sub>	total gate charge	$V_{GS} = 4.5 \text{ V}; I_D = 10 \text{ A};$ $V_{DS} = 12 \text{ V}; \text{ see } \frac{\text{Figure 14}}{\text{see } \frac{\text{Figure 15}}{\text{Figure 15}}}$		-	36	-	nC
Static characteristics							
R <sub>DSon</sub>	drain-source on-state resistance	$V_{GS} = 10 \text{ V}; I_D = 15 \text{ A};$ $T_j = 25 \text{ °C}$		-	1.13	1.5	mΩ

<sup>[1]</sup> Continuous current is limited by package.



# 2. Pinning information

**Table 2. Pinning information** 

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	S	source		_
2	S	source	mb	D
3	S	source		G
4	G	gate	Qj	<u> </u>
mb	D	mounting base; connected to drain	1 2 3 4	mbb076 S
			SOT669 (LFPAK)	

# 3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
PSMN1R5-25YL	LFPAK	plastic single-ended surface-mounted package (LFPAK); 4 leads	SOT669

# 4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
$V_{DS}$	drain-source voltage	T <sub>j</sub> ≥ 25 °C; T <sub>j</sub> ≤ 150 °C		-	25	V
$V_{DGR}$	drain-gate voltage	$T_j \ge 25 \text{ °C}; T_j \le 150 \text{ °C}; R_{GS} = 20 \text{ k}\Omega$		-	25	V
$V_{GS}$	gate-source voltage			-20	20	V
$I_D$	drain current	V <sub>GS</sub> = 10 V; T <sub>mb</sub> = 100 °C; see <u>Figure 1</u>	[1]	-	100	Α
		V <sub>GS</sub> = 10 V; T <sub>mb</sub> = 25 °C; see <u>Figure 1</u>	[1]	-	100	Α
$I_{DM}$	peak drain current	$t_p \le 10 \ \mu s$ ; pulsed; $T_{mb} = 25 \ ^{\circ}C$ ; see <u>Figure 3</u>		-	815	Α
P <sub>tot</sub>	total power dissipation	T <sub>mb</sub> = 25 °C; see <u>Figure 2</u>		-	109	W
T <sub>stg</sub>	storage temperature			-55	150	°C
Tj	junction temperature			-55	150	°C
Source-dra	ain diode					
Is	source current	$T_{mb} = 25  ^{\circ}C;$	[1]	-	100	Α
I <sub>SM</sub>	peak source current	t <sub>p</sub> ≤ 10 μs; pulsed; T <sub>mb</sub> = 25 °C		-	815	Α
Avalanche	ruggedness					
E <sub>DS(AL)S</sub>	non-repetitive drain-source avalanche energy	$V_{GS}$ = 10 V; $T_{j(init)}$ = 25 °C; $I_D$ = 100 A; $V_{sup}$ ≤ 25 V; $R_{GS}$ = 50 Ω; unclamped		-	290	mJ

<sup>[1]</sup> Continuous current is limited by package.






Fig 1. Continuous drain current as a function of mounting base temperature

 $V_{GS} \ge 10 V$ 



$$P_{der} = \frac{P_{tot}}{P_{tot(25^{\circ}C)}} \times 100\%$$

Fig 2. Normalized total power dissipation as a function of mounting base temperature

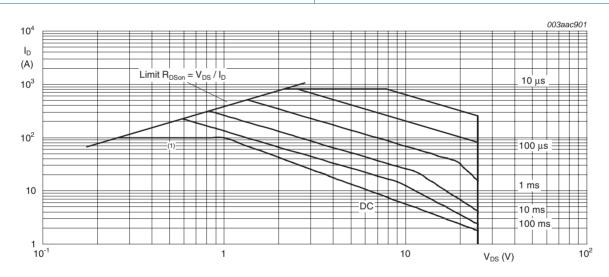

 $T_{mb} = 25 \,^{\circ}C; I_{DM}$  is single pulse

(1) Capped at 100 A due to package.


Safe operating area; continuous and peak drain currents as a function of drain-source voltage

## N-channel TrenchMOS logic level FET

# 5. Thermal characteristics

Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$R_{th(j-mb)}$	thermal resistance from junction to mounting base	see Figure 4	-	0.5	1.1	K/W

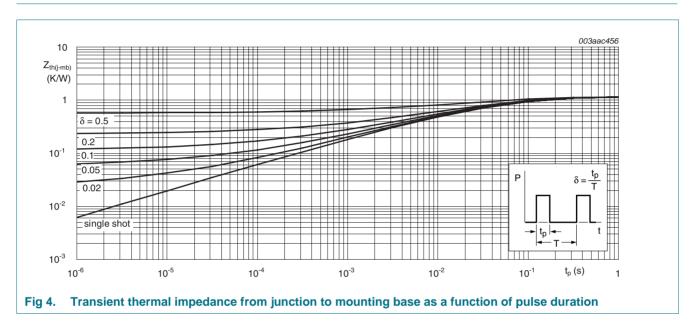

N-channel TrenchMOS logic level FET

# 6. Characteristics


Table 6. Characteristics

Table 6.	Characteristics					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static cha	racteristics					
$V_{(BR)DSS}$	drain-source	$I_D = 250 \ \mu A; \ V_{GS} = 0 \ V; \ T_j = 25 \ ^{\circ}C$	25	-	-	V
	breakdown voltage	$I_D = 250 \ \mu A; \ V_{GS} = 0 \ V; \ T_j = -55 \ ^{\circ}C$	22	-	-	V
$V_{GS(th)}$	gate-source threshold voltage	$I_D = 1$ mA; $V_{DS} = V_{GS}$ ; $T_j = 25$ °C; see <u>Figure 11</u> ; see <u>Figure 12</u>	1.3	1.7	2.15	V
		$I_D = 1 \text{ mA}$ ; $V_{DS} = V_{GS}$ ; $T_j = 150 \text{ °C}$ ; see <u>Figure 12</u>	0.65	-	-	V
		$I_D = 1$ mA; $V_{DS} = V_{GS}$ ; $T_j = -55$ °C; see Figure 12	-	-	2.45	V
I <sub>DSS</sub>	drain leakage current	$V_{DS} = 25 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	1	μΑ
		$V_{DS} = 25 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 150 \text{ °C}$	-	-	100	μΑ
$I_{GSS}$	gate leakage current	$V_{GS} = 16 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nΑ
		$V_{GS} = -16 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nΑ
R <sub>DSon</sub>	drain-source on-state	$V_{GS} = 4.5 \text{ V}; I_D = 15 \text{ A}; T_j = 25 \text{ °C}$	-	1.61	2.2	mΩ
	resistance	$V_{GS} = 10 \text{ V}; I_D = 15 \text{ A}; T_j = 150 \text{ °C};$ see Figure 13	-	-	2.6	mΩ
		$V_{GS} = 10 \text{ V}; I_D = 15 \text{ A}; T_j = 25 \text{ °C}$	-	1.13	1.5	mΩ
R <sub>G</sub>	gate resistance	f = 1 MHz	-	0.77	-	Ω
Dynamic	characteristics					
Q <sub>G(tot)</sub>	total gate charge	$I_D = 10 \text{ A}$ ; $V_{DS} = 12 \text{ V}$ ; $V_{GS} = 10 \text{ V}$ ; see Figure 14; see Figure 15	-	76	-	nC
		I <sub>D</sub> = 0 A; V <sub>DS</sub> = 0 V; V <sub>GS</sub> = 10 V	-	71	-	nC
		$I_D = 10 \text{ A}$ ; $V_{DS} = 12 \text{ V}$ ; $V_{GS} = 4.5 \text{ V}$ ; see <u>Figure 14</u> ; see <u>Figure 15</u>	-	36	-	nC
Q <sub>GS</sub>	gate-source charge	$I_D = 10 \text{ A}; V_{DS} = 12 \text{ V}; V_{GS} = 4.5 \text{ V};$	-	12.3	-	nC
Q <sub>GS(th)</sub>	pre-threshold gate-source charge	see <u>Figure 14</u> ; see <u>Figure 15</u>	-	7.8	-	nC
Q <sub>GS(th-pl)</sub>	post-threshold gate-source charge		-	4.5	-	nC
$Q_{GD}$	gate-drain charge		-	9.2	-	nC
$V_{GS(pl)}$	gate-source plateau voltage	V <sub>DS</sub> = 12 V; see <u>Figure 14</u>	-	2.4	-	V
C <sub>iss</sub>	input capacitance	$V_{DS} = 12 \text{ V}; V_{GS} = 0 \text{ V}; f = 1 \text{ MHz};$	-	4830	-	pF
C <sub>oss</sub>	output capacitance	T <sub>j</sub> = 25 °C; see <u>Figure 16</u>	-	1280	-	pF
C <sub>rss</sub>	reverse transfer capacitance		-	465	-	pF
t <sub>d(on)</sub>	turn-on delay time	$V_{DS} = 12 \text{ V}; R_L = 0.5 \Omega; V_{GS} = 4.5 \text{ V};$	-	50	-	ns
t <sub>r</sub>	rise time	$R_{G(ext)} = 4.7 \Omega$	-	97	-	ns
t <sub>d(off)</sub>	turn-off delay time		-	72	-	ns
t <sub>f</sub>	fall time		-	36	-	ns

Table 6. Characteristics ... continued


Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Source-dr	ain diode					
$V_{SD}$	source-drain voltage	$I_S = 25 \text{ A}; V_{GS} = 0 \text{ V}; T_j = 25 ^{\circ}\text{C};$ see <u>Figure 17</u>	-	0.78	1.2	V
t <sub>rr</sub>	reverse recovery time	$I_S = 20 \text{ A}$ ; $dI_S/dt = -100 \text{ A/}\mu\text{s}$ ; $V_{GS} = 0 \text{ V}$ ;	-	43	-	ns
Qr	recovered charge	$V_{DS} = 20 \text{ V}$	-	50	-	nC

[1] Tested to JEDEC standards where applicable.




 $V_{DS} = 10 V$ 

Fig 5. Transfer characteristics: drain current as a function of gate-source voltage; typical values









 $T_j = 25 \,^{\circ}C; V_{DS} = 10 \, V$ 

Fig 7. Forward transconductance as a function of drain current; typical values




 $T_i = 25 \,^{\circ}C; t_p = 300 \mu s$ 

Fig 8. Drain-source on-state resistance as a function of drain current; typical values




 $T_j = 25 \,{}^{\circ}C; I_D = 15A$ 

Fig 9. Drain-source on-state resistance as a function of gate-source voltage; typical values




$$V_{DS} = 0V; f = 1MHz$$

Fig 10. Input and reverse transfer capacitances as a function of gate-source voltage; typical values



 $T_j = 25 \,^{\circ}C; V_{DS} = 5 \, V$ 

Fig 11. Sub-threshold drain current as a function of gate-source voltage



 $I_D = 1 \, mA; V_{DS} = V_{GS}$ 

Fig 12. Gate-source threshold voltage as a function of junction temperature

www.DataSheet4U.com

N-channel TrenchMOS logic level FET




Fig 13. Normalized drain-source on-state resistance factor as a function of junction temperature




Fig 14. Gate charge waveform definitions





Fig 15. Gate-source voltage as a function of gate charge; typical values

 $T_i = 25 \,^{\circ}C; I_D = 15A$ 



 $V_{GS} = 0V; f = 1MHz$ 

Fig 16. Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values

N-channel TrenchMOS logic level FET

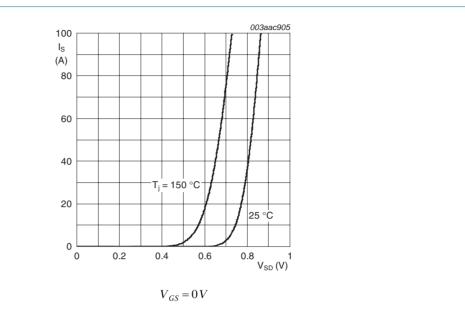



Fig 17. Source (diode forward) current as a function of source-drain (diode forward) voltage; typical values

## N-channel TrenchMOS logic level FET

# **Package outline**

## Plastic single-ended surface-mounted package (LFPAK); 4 leads

**SOT669** 

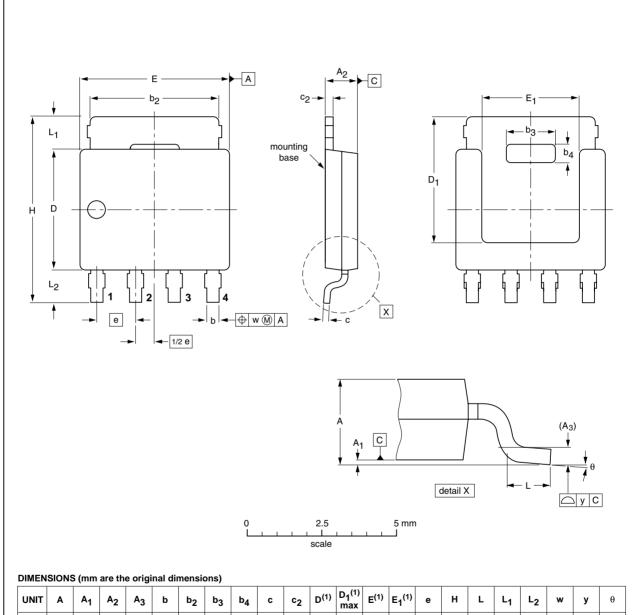

UNIT	A	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	b	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	С	c <sub>2</sub>	D <sup>(1)</sup>	D <sub>1</sub> <sup>(1)</sup> max	E <sup>(1)</sup>	E <sub>1</sub> <sup>(1)</sup>	е	Н	L	L <sub>1</sub>	L <sub>2</sub>	w	у	θ
mm	1.20	0.15	1.10	0.25	0.50	4.41	2.2	0.9	0.25	0.30	4.10	4.20	5.0	3.3	1.27	6.2	0.85	1.3	1.3	0.25	0.1	8°
	1.01	0.00	0.95		0.35	3.62	2.0	0.7	0.19	0.24	3.80		4.8	3.1		5.8	0.40	8.0	8.0			0°

#### Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE					
VERSION	IEC	JEDEC	JEITA		PROJECTION	1330E DATE			
SOT669		MO-235				<del>04-10-13</del> 06-03-16			

Fig 18. Package outline SOT669 (LFPAK)



www.DataSheet4U.com

N-channel TrenchMOS logic level FET

# 8. Revision history

## Table 7. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PSMN1R5-25YL_1	20090616	Product data sheet	-	-

### N-channel TrenchMOS logic level FET

## 9. Legal information

### 9.1 Data sheet status

Document status [1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

#### 9.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

#### 9.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

#### 9.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

TrenchMOS — is a trademark of NXP B.V.

## 10. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: <a href="mailto:salesaddresses@nxp.com">salesaddresses@nxp.com</a>

## **NXP Semiconductors**

# PSMN1R5-25YL

www.DataSheet4U.com

## N-channel TrenchMOS logic level FET

# 11. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
1.4	Quick reference data	1
2	Pinning information	2
3	Ordering information	2
4	Limiting values	2
5	Thermal characteristics	4
6	Characteristics	5
7	Package outline	.10
3	Revision history	. 11
9	Legal information	.12
9.1	Data sheet status	.12
9.2	Definitions	.12
9.3	Disclaimers	.12
9.4	Trademarks	.12
10	Contact information	12

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



All rights reserved.

