

SPL1430-2-9-PD

TECHNICAL DATA

Pigtailed Coaxial Laser Diode

Features

- 1430 nm
 - SM Fiber
- Coaxial package
- **Built-in PD**

Electrical Connection



- Applications Optical Bidi Module and Optical Receiver
- **Optical Transmitter**



Pin Configuration		Bottom View
PIN	Function	the 1 size
1	PD Cathode	
2	PD Anode	
3	LD Anode, GND	
4	LD Cathode	


Specifications (25°C)

Туре	Min.	Тур.	Max.	Unit
Optical Specification			Шал	
Output Power P _F	1	2	-	mW
Center Wavelength λ_{c}	1428	1430	1433	nm
Spectral Width Δλ	-	-	-	nm
Fiber Characteristics				
Fiber Kind	-	9	-	μm
Fiber Length	-	0.8	1.0	m
Connector	FC/SC/ST/LC/MU			
Electrical Specification				
Slope Efficiency E _S	-		-	mW/mA
Threshold Current I _{th}	5	11	15	mA
Operation Current Io	-	30	35	mA
Operation Voltage V _f	-	1.1	1.6	V
Monitor Current I _m	0.1	-	-	mA
PD Reverse Voltage	-	15	-	V
PD Capacitance	-	10	15	pF
PD Dark Current	-	-	0.1	μA
Side Mode Suppression Ration	30	35	-	dB
Data Rate	1.25			Gb/s
Package Style	Coaxial			
Absolute Maximum Ratings				
Reverse Voltage V _r	2.0			V
Operating Temperature T _{Op}	-10 +50			°C
Storage Temperature T _{stg}	-40 +85			°C
Lead Soldering Temperature (10 sec.)	260			٦°

The above specifications are for reference purpose only and subjected to change without prior notice.



Package Dimensons (Unit: mm)

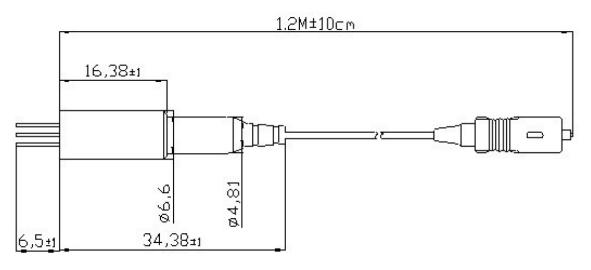

Safety of Laser light

• Laser Light can damage the human eyes and skin. Do not expose the eye or skin directly to any laser light and/or through optical lens. When handling the LDs, wear appropriate safety glasses to prevent laser light, even any reflections from entering to the eye. Focused laser beam through optical instruments will increase the chance of eye hazard.



• These LDs are emitting invisible light.

Cautions

1. Operating methode

- This LD shall change its forward voltage requirement and optical ouput power according to temperature change. Also, the LD will require more operation current to maintain same ouput power as it degrades. In order to maintain output power, use of APC (Automatic Power Control) is recommended. Which use monitor feedback to adjust the operation current.
- Confirm that electrical spike current generated by swithing on and off does not exceed the maximum operating current level specified herein above as absolute maximum rating. Also, employ appropriat countermeasures to reduce chattering and/or overshooting in the circuit.

2. Static Electricity

• Static electricity or electrical surges will reduce and degrade the reliability of the LDs. It is recommended to use a wrist trap or anti-electrostatic glove when handeling the product.

3. Absolute Maximum Rating

• Active layer of LDs shall have high current density and generate high electric field during its operation. In order to prevent excessive damage, the LD must be operated strictly below absolute maximum rating.

