## HFA4

# SAFETY RELAY (RELAY WITH FORCIBLY GUIDED CONTACTS)

# **c 91** US

File No.:E134517



File No.:40034342



#### Features

- Multi contact arrangements: 2NO+2NC, 3NO+1NC
- Forcibly guided contacts according to EN50205
- 6A switching capability
- Low input power: 360mW
- High insulation capability: 10kV surge voltage between input and output
- UL insulation system: Class F available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (40.0 x 13.0 x 24.0) mm

## **CONTACT DATA**

Contact arrangement	2NO+2NC (2H2D type)
	3NO+1NC (3H1D type)
Forcibly guided contacts Type (according to EN50205)	Туре А
Contact resistance	100mΩ max. (at 1A 6VDC)
Contact material	AgSnO <sub>2</sub>
Contact rating (Res. load)	6A 250VAC / 30VDC
Max. switching voltage	400VAC / 30VDC
Max. switching current	6A
Max. switching power	1500VA /180W
Electrical endurance	1 x 10 <sup>5</sup> ops
	1 x 10 <sup>5</sup> ops (1NO: 6A 30VDC,
Mechanical endurance	Resistive load, at 85°C, 1s on 9s off)
Medianical endulance	5 x 10 <sup>4</sup> ops (1NO: 6A 250VAC,
	Resistive load, at 85°C, 1s on 9s off)

### COIL

Coil power Approx. 360mW

#### COIL DATA at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC 1)	Coil resistance Ω
6	4.5	0.6	7.8	100 x (1±10%)
9	6.8	0.9	11.7	225 x (1±10%)
12	9.0	1.2	15.6	400 x (1±10%)
18	13.5	1.8	23.4	900 x (1±10%)
24	18.0	2.4	31.2	1600 x (1±10%)
36	27.0	3.6	46.8	3600 x (1±10%)
48 <sup>2)</sup>	36.0	4.8	62.4	6400 x (1±10%)

Notes: 1) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

 For products with rated voltage ≥ 48V, measures should be taken to prevent coil overvoltage in order to protect coil in test and application (eg. Connect diodes in parallel).

### **CHARACTERISTICS**

Insulation resistance		1000MΩ (at 500VDC)		
-	Between coil & contacts	4000VAC 1 m		
	Between open contacts	1500VAC 1 min		
	Between contact sets	2500VAC 1 min (7-8/9-10)		
	Detween contact sets	4000VAC 1 min (Other)		
Surge	Between coil & contacts	10kV (1.2 / 50μ		
voltage	Between contact sets	5kV (1.2 / 50μs)		
Operate time (at rated voltage)		20ms max		
Release t	ime (at rated voltage)	20ms max.		
Vibration resistance		NO/NC:10Hz to 55Hz 1.5mm DA		
		NO:55Hz to 200Hz, 98m/s		
		NC:55Hz to 200Hz, 49m/s		
Shock	Functional	100m/s <sup>2</sup>		
resistance	Destructive	980m/s		
Creepage	Between coil & contacts	8mm		
distance	Between contacts	5.5mm		
Clearance	Between coil & contacts	8mm		
distance	Between contacts	5.5mm		
Humidity		5% to 85% F		
Ambient temperature		-40°C to 85°C		
Termination		PC		
Unit weight		Approx. 20		
Construction		Flux proofe		

Notes: 1) The data shown above are initial values.
2) UL insulation system: Class F, Class B.

#### **SAFETY APPROVAL RATINGS**

UL/CUL	6A 277VAC / 250VAC / 125VAC at 85°C
	6A 30VDC at 85°C
	Pilot duty: 2A 240VAC at room temp.
VDE	6A 250VAC at 85°C
	6A 30VDC at 85°C
	AC-15: 1.5A 240VAC at room temp.
	AC-15: 2A 240VAC at room temp.

Notes: 1) All values unspecified are at room temperature.


Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2014 Rev. 1.01

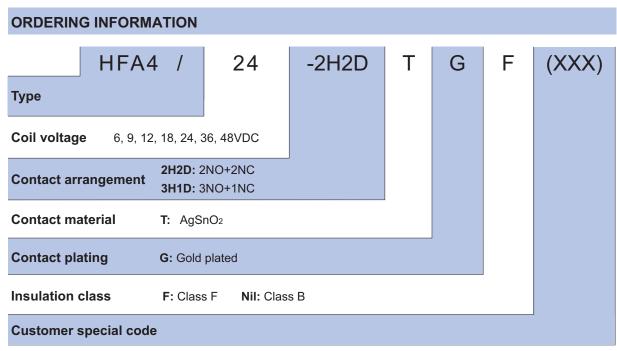

Notes: 1) This product is a soldering flux type products, when the product into the PCB plate welding does not allow for cleaning.


2) For gold plated type, the min. switching current and min. switching voltage is 10mA 5VDC. If customers have special requirment of load, please contact us for suggestion about suitable parts.


### **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**

Unit: mm


HFA4/ ;1;1 - 2H2DT ;1 (;1;1;1)

#### **Outline Dimensions**






## Wiring Diagram (Bottom view)



## PCB Layout (Bottom view)




### **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**


Unit: mm

HFA4/ ;1;1 - 3H1DT ;1 (;1;1;1)


#### **Outline Dimensions**



## Wiring Diagram (Bottom view)



# PCB Layout (Bottom view)




Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.


2) The tolerance without indicating for PCB layout is always ±0.1mm.

### **CHARACTERISTIC CURVES**

#### MAXIMUM SWITCHING POWER




#### **ENDURANCE CURVE**




**Test conditions:**1NO, Resistive load, 250VAC, Room temp., 1s on 9s off.

#### COIL TEMPERATURE RISE



Percentage Of Nominal Coil Voltage

## **Relay Sockets**



### **Features**

- The dielectric strength (between coil and contacts) can reach 4000VAC and the insulation resistance is 1000 MΩ
- DIN rail or Screw mounting
- With diode to protect the coil and to eliminate the converse current
- With finger protection device
- Buit-in retainer and exfractor


#### **CHARACTERISTICS**

Туре	Nominal Voltage		Applicable coil voltage of relay	Amhiant Tamnaratura	Torque*	Max.wire cross section mm <sup>2</sup>	Wire Strip Length	Notes
A4-4Z-C2-D24	250VAC	6A	(6 to 24)VDC	-25 °C to 55°C	1.0N · m	2 x1.5	7mm	With LED
A4-4Z-C2-D60	250VAC	6A	(36 to 60)VDC	-25 °C to 55°C	1.0N · m	2 x1.5	7mm	With LED
A4-4Z-C2-D110	250VAC	6A	(85 to 110)VDC	-25 °C to 55°C	1.0N · m	2 x1.5	7mm	With LED
A4-4Z-C2	250VAC	6A	(6 to 110)VDC	-25 °C to 55°C	1.0N · m	2 x1.5	7mm	Without LED

Notes: \* Refers to wire-assembled torque.

#### **OUTLINE DIMENSIONS, WIRING DIAGRAM AND CIRCUIT DIAGRAM**

Unit: mm

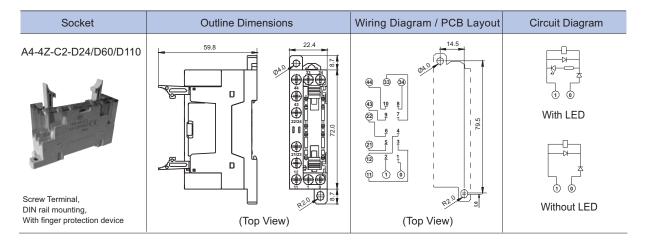

#### Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.