



PLL Synthesizer Module

Features


+5 dBm Output Level at 1690 MHz
Channel Step Size: 1000 kHz
2nd Harmonic: < -20 dBc
Spurious Level: < -65 dBc

· Lock Time: < 10 ms

· 30 mA Current Consumption

Description

The plerowTM PLL synthesizer module was designed for use in wireless and wireline systems in a wide range of frequency from 50 MHz to 6 GHz. ASB's PLL provides exceptionally low spurious and phase noise performance with fast locking time and low current consumption. All products are available in a surface-mount type package.



Specifications

Parameter	Unit	Min.	Typical	Max.
Frequency Range	MHz		1690	
Output Power	dBm	3	5	7
Supply Voltage	V	4.7	5.0	5.3
Current Consumption	mA		30	40
Channel Step Size	kHz		1000	
2 nd Harmonics	dBc		-25	-20
Spurious Level	dBc			-65
Lock Time	ms			10
Reference Frequency	MHz		13	
Reference Input Level	dBm		-	
Phase Noise (C / N)				
@ 1 kHz	dBc/Hz		-75	-65
@ 10 kHz	dBc/Hz		-105	-95
@ 100 kHz	dBc/Hz		-120	-115
Output Impedance	Ω		50	
Operating Temp. Range	°C	-40	25	85
Package Type & Size	mm	SMT, 19.0W×19.0L×5.8H		

1) Measurement conditions are as follows: T = 25°C, V_{CC} = 5 V, Freq. = 1090 MHz, 50 ohm system.

More Information

Website: www.asb.co.kr E-mail: sales@asb.co.kr

Tel: (82) 42-528-7225 Fax: (82) 42-528-7222

ASB, Inc., 4th FI. Venture Town Bldg, KT HRDC, 367-17 Goijeong-Dong, Seo-Gu, Daejeon, 302-716, Korea


²⁾ Frequency Stability of internal ref. TCXO is \pm -2.5 ppm (max) over the operating temperature range.




Outline Drawing

APL0000-R/T Type

Туре	Dimension
PLL IC + VCO + ROM + TCXO	19 x 19 x 5.8

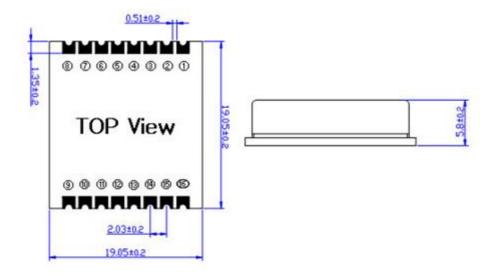

Pin Out for PLL					
Pin No.	Application	Pin No.	Application		
1	GROUND	9	VCC (VCO)		
2	GROUND	13	RF OUT		
3	GROUND	15	VCC (PLL)		
4	GROUND	16	LOCK DETECT		

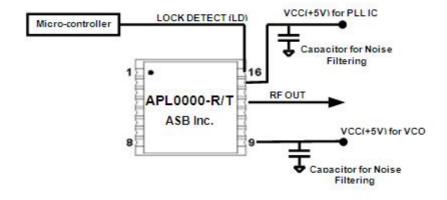

Copyright ©2006-2017 ASB Inc. All rights reserved. Datasheet subject to change without notice. ASB assumes no responsibility for any errors which may appear in this datasheet. No part of the datasheet may be copied or reproduced in any form or by any means without the prior written consent of ASB.