


Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low forward voltage drop
- High current capability
- High reliability
- Low power loss, high efficiency
- High surge current capability
- High speed switching
- Low leakage

Mechanical Data

- Case : JEDEC TO-3P molded plastic body
- Terminals : Lead solderable per MIL-STD-750, method 2026
- Polarity : As marked
- Mounting Position : Any
- Weight : 0.20 ounce, 5.60 gram

TO-3P

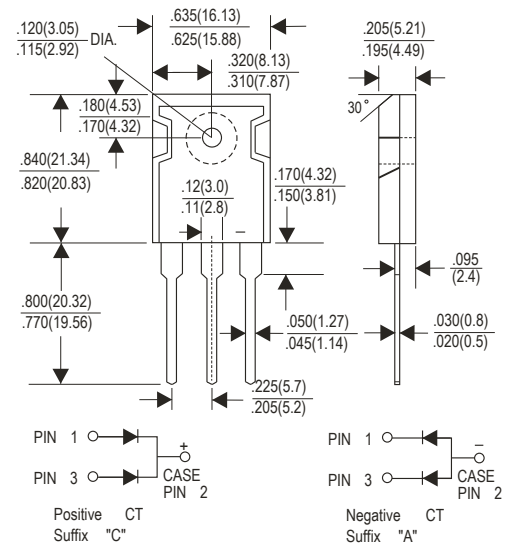

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	HER 3001	HER 3002	HER 3003	HER 3004	HER 3005	HER 3006	Units
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	300	400	600	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length @ at T _A =100°C	I <sub(av)< sub=""></sub(av)<>	30.0						Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	300						Amps
Maximum instantaneous forward voltage at 15.0A	V _F	1.0			1.3	1.7	Volts	
Maximum DC reverse current at rated DC blocking voltage T _A =25°C	I _R	10.0						μA
Maximum DC reverse current at rated DC blocking voltage T _A =125°C		100						
Maximum reverse recovery time (Note 1)	T _{rr}	50				80	ns	
Typical junction capacitance (Note 2)	C _J	175				145	pF	
Operating junction and storage temperature range	T _J T _{STG}	-55 to +150 -55 to +150						°C

Notes:

- (1) Test conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A.
- (2) Measured at 1MHz and applied reverse voltage of 4.0 Volts.

RATINGS AND CHARACTERISTIC CURVES HER3001 THRU HER3006

FIG . 1 -REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

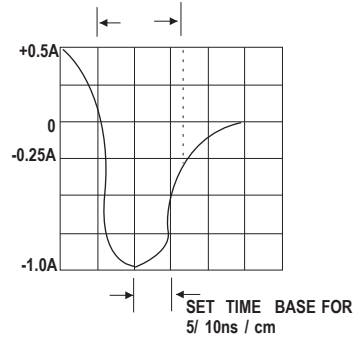
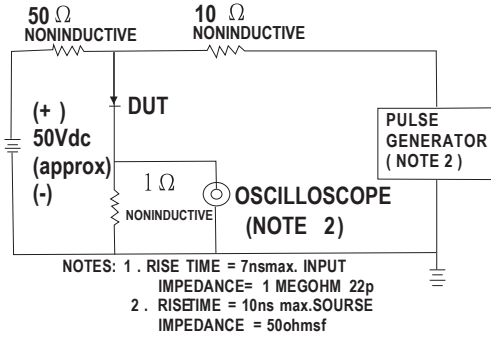


FIG . 2 -MAXIMUM AVERAGE FORWARD CURRENT DERATING

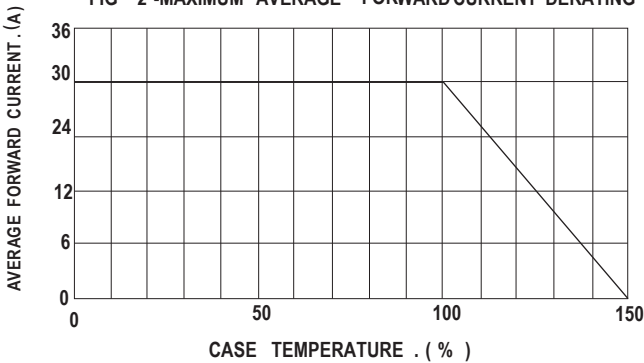


FIG . 3 -TYPICAL REVERSE CHARACTERISTICS PER LEG

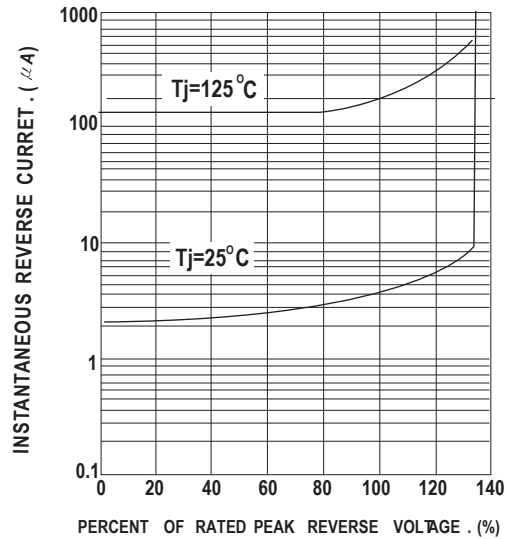


FIG . 4 -MAXIMUM NON - REPETITIVE FORWARD SURGE CURRENT

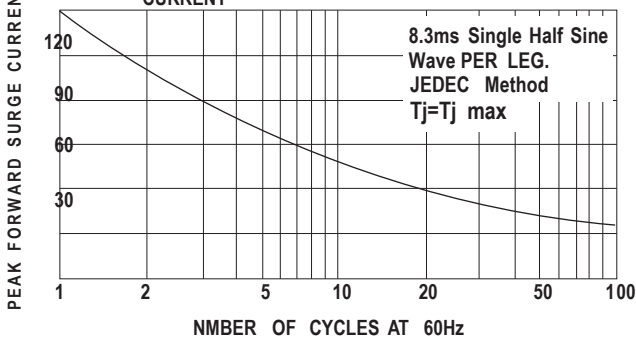


FIG . 6 -TYPICAL FRWARD CHARACTERISTICS

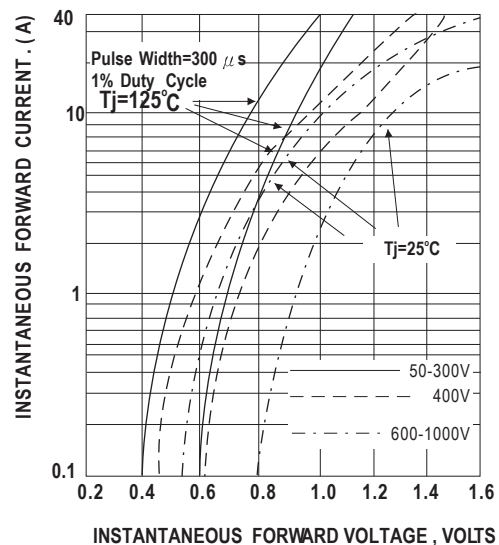


FIG . 5 -TYPICAL JUNCTION CAPACITANCE PER LEG

