


SPECIFICATION FOR APPROVAL

REF :

PAGE: 1


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SS0906□□□□L□-□□□
------------	--------------------------------	---------------------------------	------------------

. CONFIGURATION & DIMENSIONS :

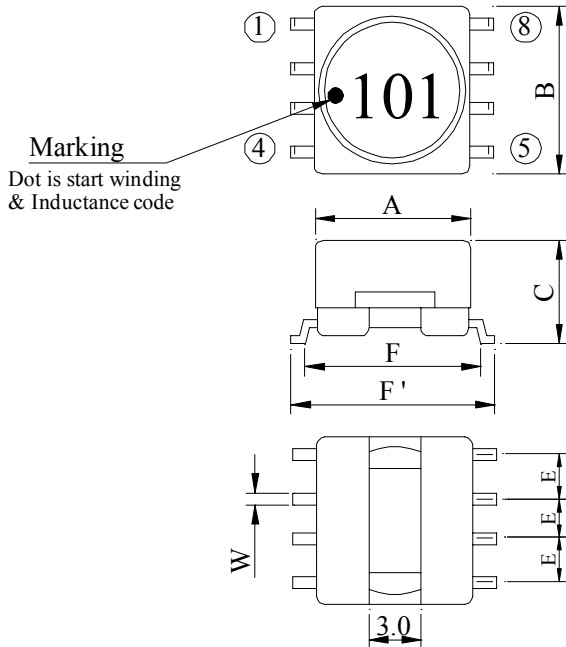


A	: 9.5±0.3	m/m
B	: 10.5 max.	m/m
C	: 6.0±0.3	m/m
E	: 2.5±0.3	m/m
F	: 11.0±0.5	m/m
F'	: 12.7±0.8	m/m
W	: 0.6 typ.	m/m

. SDS0906 Series




(PCB Pattern)

. SCHEMATIC DIAGRAM :



. MATERIALS :


- a . Core : Ferrite DR core
- b . Core : Ferrite RI core
- c . Wire : Enamelled copper wire (class F)
- d . Base : LCP
- e . Terminal : Cu/Ni/Sn
- f . Adhesive : Epoxy resin
- g . Remark : Products comply with RoHS' requirements

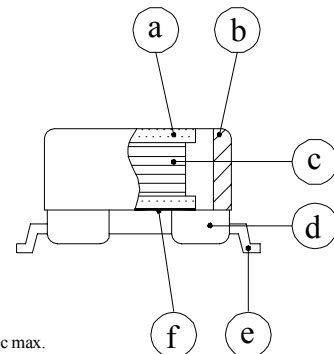

Peak Temp : 260 max.
Max time above 230 : 50sec max.
Max time above 200 : 70sec max.

. GENERAL SPECIFICATION :

- a . Temp. rise : 40 max.
- b . Rated current : Base on temp. rise & L / LOA=10% max.
- c . Storage temp. : -40 ----+125
- d . Operating temp. : -40 ----+105
- e . Resistance to solder heat : 260 . 10 secs.

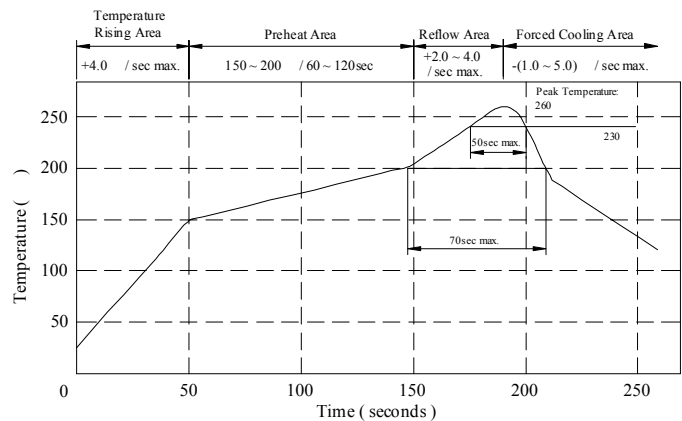

AE-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0906□□□□L□-□□□
		ABC'S ITEM NO.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μH)	Q ref.	Test Freq. (Hz)		SRF (MHz) nom.	RDC (Ω) max	IDC (A) max
			L	Q			
SS09062R7ML□-□□□	2.70±20%	23	1K	7.960M	85.0	0.032	3.20
SS09063R5ML□-□□□	3.50±20%	23	1K	7.960M	80.0	0.036	2.90
SS09064R7ML□-□□□	4.70±20%	23	1K	7.960M	70.0	0.040	2.70
SS09065R6ML□-□□□	5.60±20%	23	1K	7.960M	57.0	0.046	2.50
SS09066R8ML□-□□□	6.80±20%	23	1K	7.960M	38.0	0.050	2.30
SS09068R2ML□-□□□	8.20±20%	23	1K	7.960M	30.0	0.055	2.10
SS0906100ML□-□□□	10.00±20%	35	1K	2.520M	29.0	0.080	1.80
SS0906120ML□-□□□	12.00±20%	35	1K	2.520M	26.0	0.085	1.70
SS0906150ML□-□□□	15.00±20%	35	1K	2.520M	29.0	0.100	1.60
SS0906180ML□-□□□	18.00±20%	35	1K	2.520M	22.0	0.110	1.50
SS0906220ML□-□□□	22.00±20%	35	1K	2.520M	19.0	0.130	1.40
SS0906270ML□-□□□	27.00±20%	35	1K	2.520M	17.0	0.140	1.30
SS0906330ML□-□□□	33.00±20%	35	1K	2.520M	15.0	0.150	1.20
SS0906390ML□-□□□	39.00±20%	35	1K	2.520M	14.0	0.160	1.10
SS0906470ML□-□□□	47.00±20%	35	1K	2.520M	12.0	0.180	1.00
SS0906560ML□-□□□	56.00±20%	35	1K	2.520M	12.0	0.300	0.93
SS0906680ML□-□□□	68.00±20%	40	1K	2.520M	9.0	0.350	0.85
SS0906820ML□-□□□	82.00±20%	40	1K	2.520M	8.0	0.370	0.78
SS0906101YL□-□□□	100.00±15%	40	1K	0.796M	7.5	0.420	0.70
SS0906121YL□-□□□	120.00±15%	40	1K	0.796M	7.0	0.480	0.65
SS0906151YL□-□□□	150.00±15%	40	1K	0.796M	6.0	0.550	0.60
SS0906181YL□-□□□	180.00±15%	40	1K	0.796M	5.5	0.820	0.52
SS0906221YL□-□□□	220.00±15%	40	1K	0.796M	5.0	1.000	0.48
SS0906271YL□-□□□	270.00±15%	40	1K	0.796M	5.0	1.100	0.44
SS0906331YL□-□□□	330.00±15%	40	1K	0.796M	4.5	1.300	0.40
SS0906391YL□-□□□	390.00±15%	40	1K	0.796M	4.2	1.400	0.38
SS0906471YL□-□□□	470.00±15%	40	1K	0.796M	4.0	1.600	0.35
SS0906561YL□-□□□	560.00±15%	60	1K	0.796M	3.2	2.700	0.28
SS0906681YL□-□□□	680.00±15%	60	1K	0.796M	2.7	3.200	0.25
SS0906821YL□-□□□	820.00±15%	85	1K	0.796M	2.6	3.500	0.23
SS0906102YL□-□□□	1000.00±15%	100	1K	0.252M	2.3	4.000	0.22
SS0906122YL□-□□□	1200.00±15%	100	1K	0.252M	2.3	4.400	0.20
SS0906152YL□-□□□	1500.00±15%	100	1K	0.252M	2.0	5.200	0.18
SS0906182YL□-□□□	1800.00±15%	100	1K	0.252M	1.7	7.000	0.17
SS0906222YL□-□□□	2200.00±15%	100	1K	0.252M	1.5	8.500	0.16
SS0906272YL□-□□□	2700.00±15%	100	1K	0.252M	1.4	9.200	0.14
SS0906332YL□-□□□	3300.00±15%	100	1K	0.252M	1.3	11.000	0.12
SS0906392YL□-□□□	3900.00±15%	100	1K	0.252M	1.2	16.000	0.11
SS0906472YL□-□□□	4700.00±15%	100	1K	0.252M	1.0	19.000	0.10
SS0906562YL□-□□□	5600.00±15%	100	1K	0.252M	0.9	21.000	0.09
SS0906682YL□-□□□	6800.00±15%	100	1K	0.252M	0.9	24.000	0.09
SS0906822YL□-□□□	8200.00±15%	100	1K	0.252M	0.8	31.000	0.08
SS0906103YL□-□□□	10000.00±15%	100	1K	79.60K	0.7	38.000	0.07

- 1). □ : Packaging information... [A]: Bulk [B]: Taping Reel
 2)."-□□□":Reference code

AE-001A




SPECIFICATION FOR APPROVAL

REF :

PAGE: 3

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0906□□□□L□-□□□
		ABC'S ITEM NO.	

. INDUCTANCE VS. DC CURRENT CURVE :

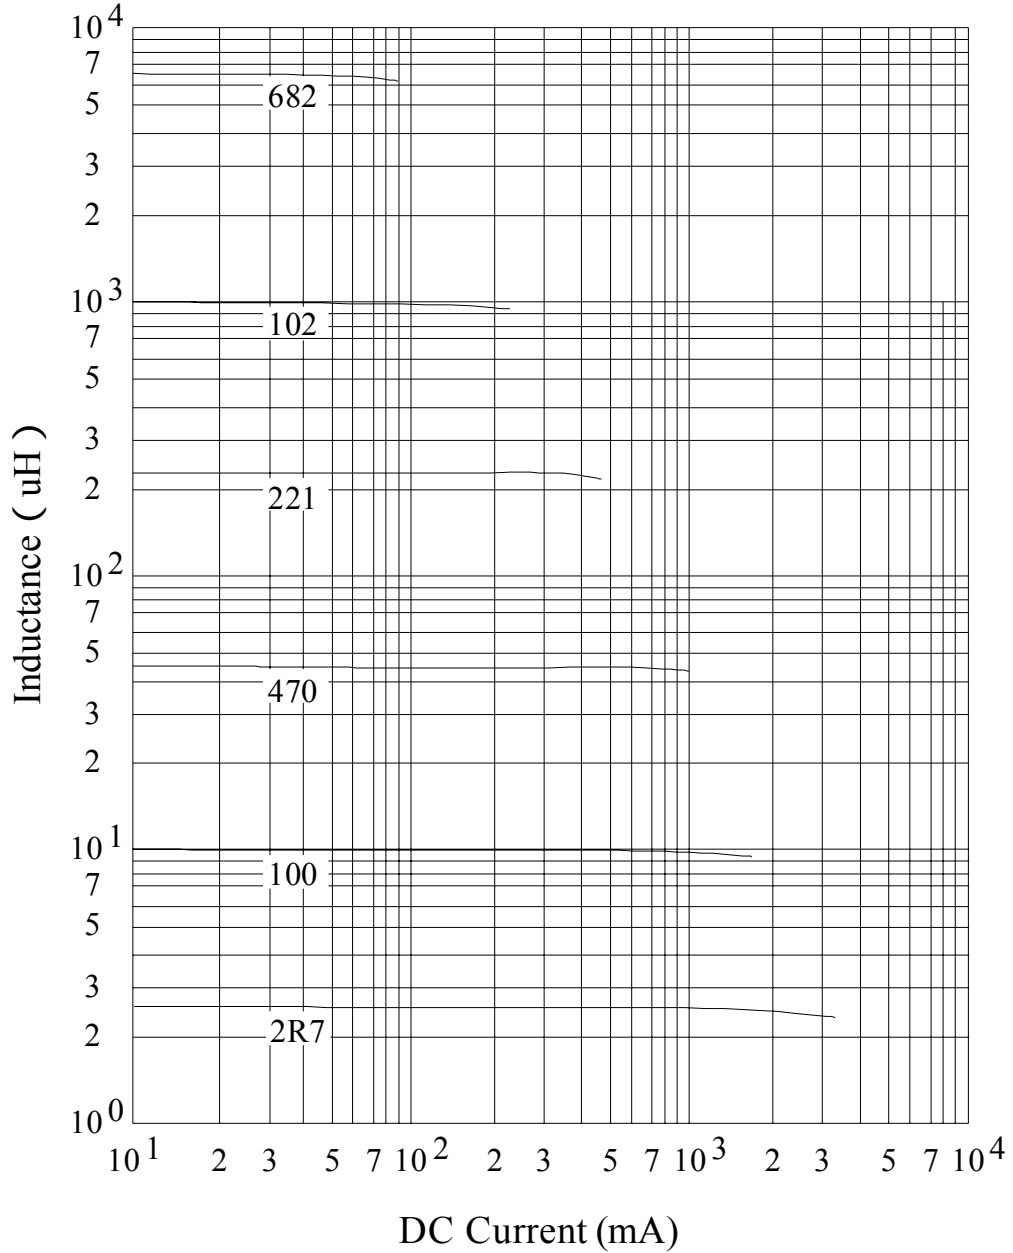

AE-001A

SPECIFICATION FOR APPROVAL



REF :

PAGE: 4

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0906□□□□L□-□□□
		ABC'S ITEM NO.	

PACKAGING INFORMATION :

(1) Configuration

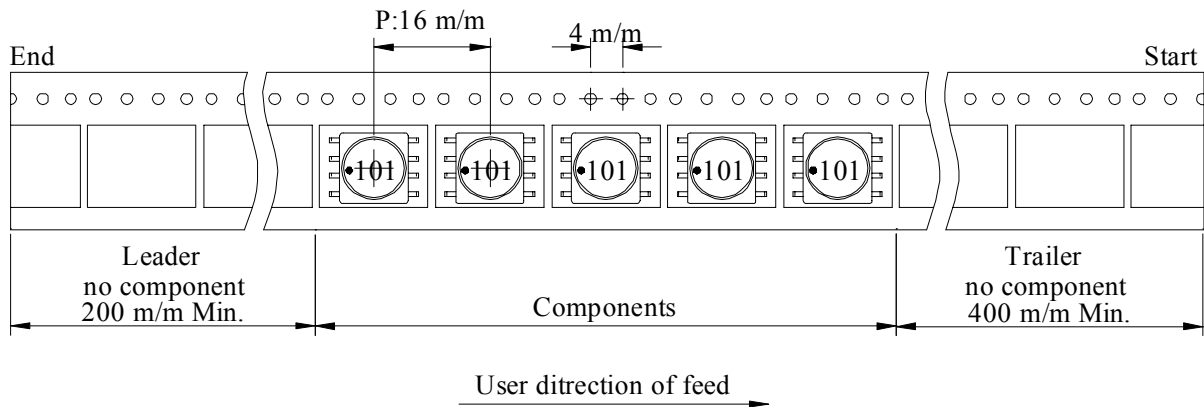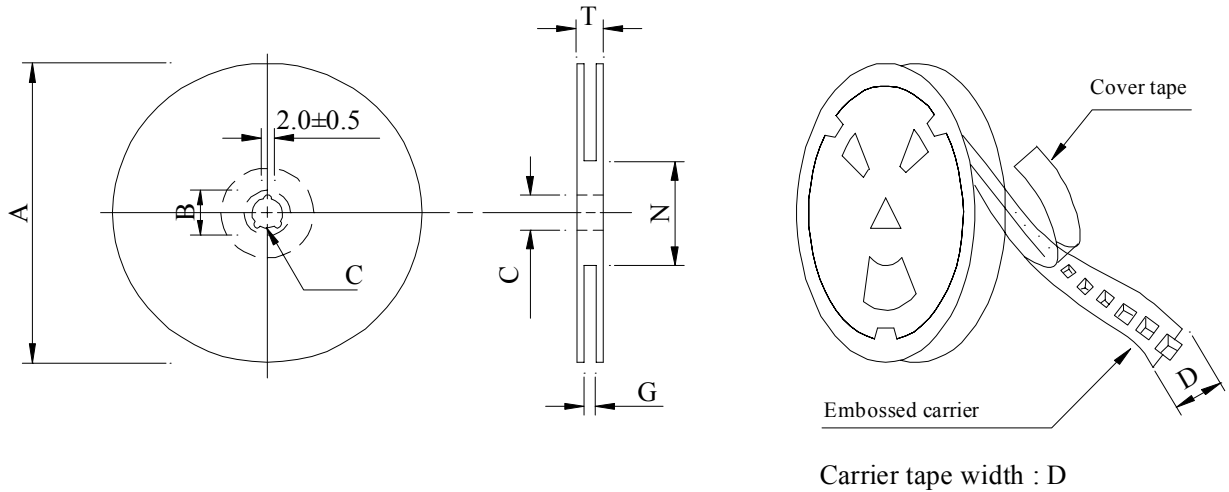

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13	24	26 ⁺⁰	50 ⁻⁰	30.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SS0906	600	2,000	13 - 24	2,400	10.2	40 x 40 x 24

AE-001A




SPECIFICATION FOR APPROVAL

REF :

PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0906□□□□L□-□□□
		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

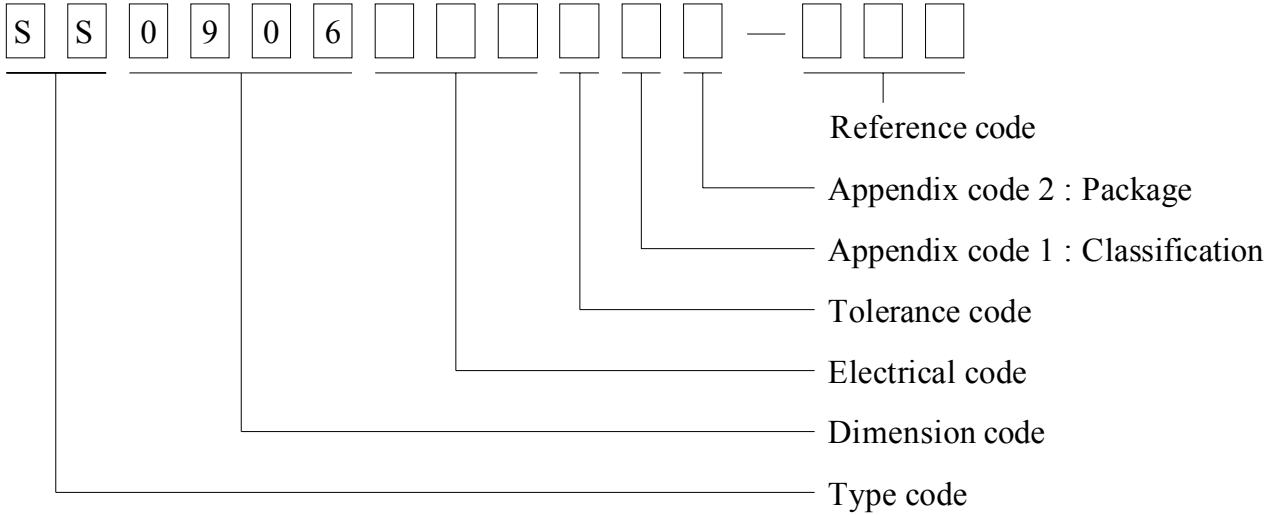

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	600 pcs	

SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD.	SHIELDED SMD	ABC'S DWG NO.	SS0906□□□□L□-□□□
NAME	POWER INDUCTOR	ABC'S ITEM NO.	

. RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds						
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">-25±2 30 minutes</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">85±2 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-25±2 30 minutes	Room temp. 15 minutes	→	85±2 30 minutes
Room temp. 15 minutes		→	-25±2 30 minutes					
Room temp. 15 minutes		→	85±2 30 minutes					
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours						
High temp. Resistance test	Temperature : 105±2 Applied current : Per spec. Time : 500 hours							

AE-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 7

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0906□□□□L□-□□□
		ABC'S ITEM NO.	

. UL CARD :

OBMW2 September 8, 2000
Magnet Wire-Component

JUNG SHING WIRE CO LTD E174837
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide		---	MW81-C	220
CFUEWB	---	Polyurethane		---	MW75C	130
EIAIW	---	Polyesterimide	Polyamideimide	---	MW35C	200
EILOCKY	---	Polyesterimide	Polyamide	---	---	180
EILOCKW	---	Polyesterimide	Modified Epoxy	---	---	200
EIW	---	Polyesterimide		---	---	220
EIW-2	---	Polyesterimide		---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	Polyamide	---	---	155
LSFFW	---	Polyurethane		---	MW79-C	155
LSUEW	---	Polyurethane		---	---	130
PEW	---	Polyester		---	---	155
PEY	---	Polyester	Nylon	---	MW24-C	155
SF.FLW	---	Modified Polyester		---	MW26C	155
SF.EIW	---	Polyesterimide		---	MW77C	180
SF.BY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.FLY@	---	Modified Polyester	Nylon	---	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	Modified Polyamide	---	---	155
SF.EILOCKY#	---	Polyesterimide	Polyamide	---	---	180
SF.EILOCKBS	---	Polyesterimide	Modified Polyamide	---	---	180
SF.BW@	---	Modified Polyester		---	MW26C	155
SFFW	---	Polyurethane		---	MW79	155

A not-for-profit organization dedicated to public safety and committed to quality service

287806002 Page 1 of 2

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane		Polyamide	MW80C	155
UEW-1	---	Polyurethane		---	MW2-C	105
UEW-2	---	Polyurethane		---	---	130
UEW-4	---	Polyurethane		---	MW75C	130
UEY	---	Polyurethane		Nylon	MW28-C	130
UEY-2	---	Polyurethane		Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.
LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks JSW or 榮星電線 , material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2 OBMW2E174837
September 8, 2000

AE-001A

