

Model No.	OST05WG01GD-XXXXT531B
REV.	C1

T5 Round AUTO LED

Descriptions:

- Green light source, fast response
- Long life, easy installation
- Voltages available 12VDC
- LED model number: XXXXT531B


Features:

- Available in red , yellow , green , blue , white
- High temperature and environmental protection PA material for lamp holder
- Low power consumption
- Energy saving
- Eye protection, no stroboflash, no radiation
- Long life

Application:

- Dashboard Light
- Width-indicator Lamp
- Signal Light

Product Picture and Dimensions:

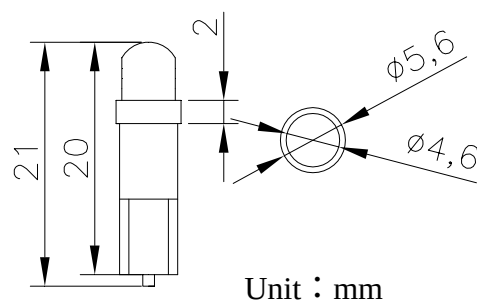



Model No.	OST05WG01GD-XXXXT531B
REV.	C1

Device Selection Guide

Module No.	Color	Wavelength (Typ.)	Intensity / Per LED (Typ.)	Overall luminous flux
R5RUT531B	Red	625 nm	3200mcd	1.0lm
G5DUT531B	Green	525 nm	35000mcd	3.5lm
B5YUT531B	Blue	470 nm	9100mcd	0.6lm
Y5RUT531B	Yellow	590 nm	3200mcd	1.0lm
W5YKT531B	White	X=0.27,Y=0.28	18000mcd	3.0lm

Absolute Maximum Ratings(Ta=25°C)

Items	Symbol	Values	Units
Operating Supply Range(DC)	V _{idc}	16	V
Input Current (DC)	I _i	30	mA
Power Dissipation	P _a	0.48	W
Operating Temperature	T _{ope}	-10 ~ +40	DegC
Storage Temperature	T _{stg}	-20 ~ +80	DegC

Typical Performance (Ta=25°C)

Items	Symbol	Min.	Typ.	Max.	Units
LED Module Power	P _m	-	0.24	0.48	W
Input Voltage(DC)	V _i	-	12	16	V
Product Input Current	I _f	-	20	30	mA
Beam Pattern	BP	-	30	-	Deg
Total Diameter of PCB	L _{mod.}	-	21	-	mm
Net Weight	Wei.	---	0.36	---	g