

RGP10A-RGP10M

Fast Recovery Rectifiers

VOLTAGE RANGE: 50 --- 1000 V

CURRENT: 1.0 A




Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO-15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces 0.39 grams
- ◇ Mounting position: Any

DO - 15

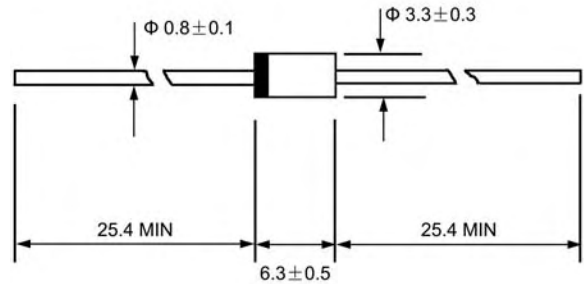

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		RGP 10A	RGP 10B	RGP 10D	RGP 10G	RGP 10J	RGP 10K	RGP 10M	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	I_{FSM}	30.0							A
Maximum instantaneous forward voltage @ 1.0 A	V_F	1.3							V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	10.0 200.0							μA
Maximum reverse recovery time (Note1)	t_{rr}	150				250	500		ns
Typical junction capacitance (Note2)	C_J	15							pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	50							$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	- 55---- + 150							$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55---- + 150							$^\circ\text{C}$

NOTE:1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $t_{rr}=0.25\text{A}$.


2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

Ratings AND Characteristic Curves

AVERAGE FORWARD RECTIFIED CURRENT

FIG.1 – FORWARD DERATING CURVE

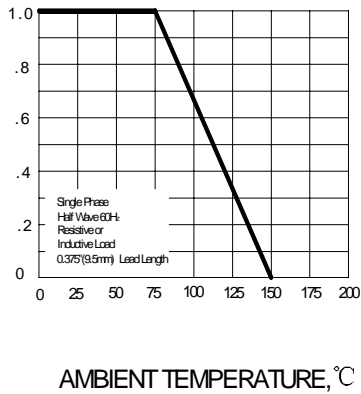

PEAK FORWARD SURGE CURRENT

FIG.2-PEAK FORWARD SURGE CURRENT

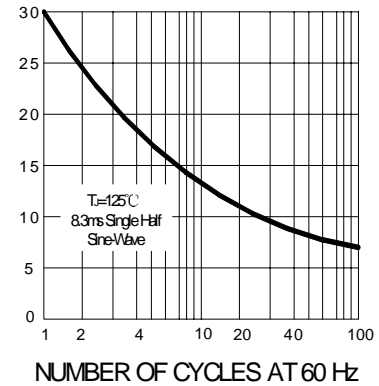


FIG.3-TYPICAL FORWARD CHARACTERISTIC

FORWARD CURRENT

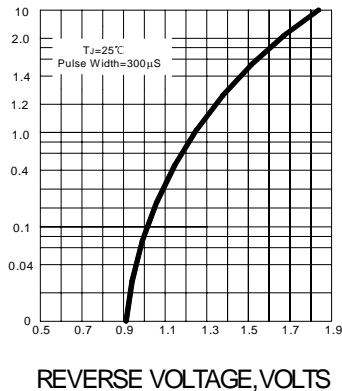


FIG.4 –REVERSE CURRENT VS REVERSE VOTAGE

REVERSE CURRENT

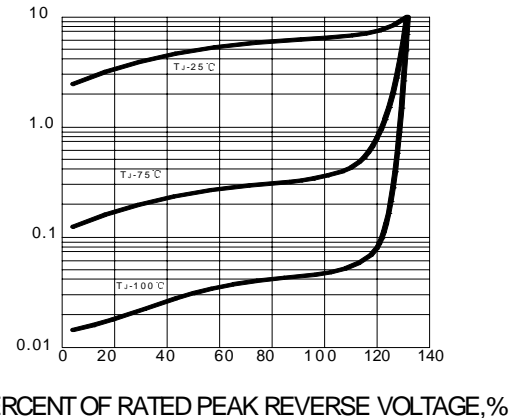


FIG.5 – TYPICAL JUNCTION CAPACITANCE

JUNCTION CAPACITANCE,pF



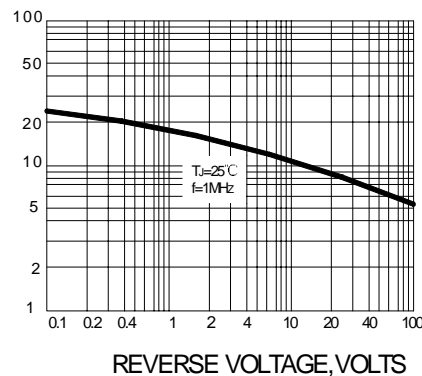


FIG.6 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

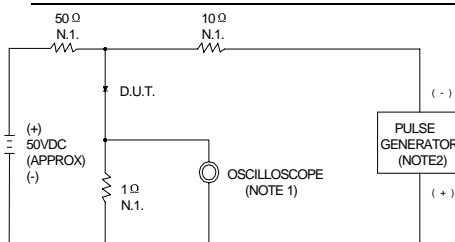

NOTES: 1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ, 22pF

2. RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

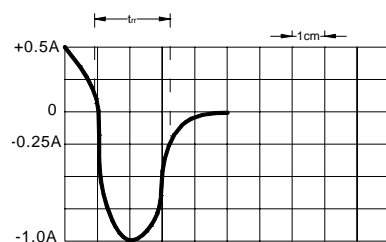

SET TIME BASE FOR 50/100 ns /cm