




- FEATURES**
- Glass Passivated Die Construction
 - Diffused Junction
 - Super-Fast Switching for High Efficiency
 - High Current Capability and Low Forward Voltage Drop
 - Surge Overload Rating to 125A Peak Low Reverse Leakage Current
 - Plastic Material: UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Marking: Type Number
- Weight: 1.12 grams (approx.)
- Mounting Position: Any

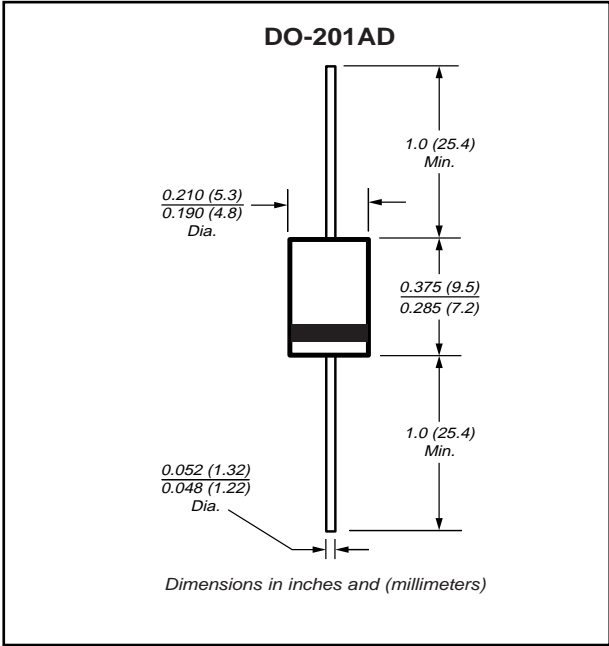

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	SF30 AG	SF30 BG	SF30 CG	SF30 DG	SF30 FG	SF30 GG	SF30 HG	SF30 JG	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	150	200	300	400	500	600	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	100	140	210	280	350	420	V
Average Rectified Output Current (Note 1) @ $T_A = 55^\circ C$	I_O	3.0								A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	125								A
Forward Voltage @ $I_F = 3.0A$	V_{FM}	0.95			1.3		1.5			V
Peak Reverse Current @ $T_A = 25^\circ C$ at Rated DC Blocking Voltage @ $T_A = 100^\circ C$	I_{RM}	5.0				100				μA
Reverse Recovery Time (Note 3)	t_{rr}	35			40		50			ns
Typical Junction Capacitance (Note 2)	C_j	75						50		pF
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	32								K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150								$^\circ C$

- Notes:
1. Valid provided that leads are maintained at ambient temperature at a distance of 9.5mm from the case.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Measured with $I_F = 0.5A$, $I_R = 1.0A$, $I_{rr} = 0.25A$. See Figure 5.

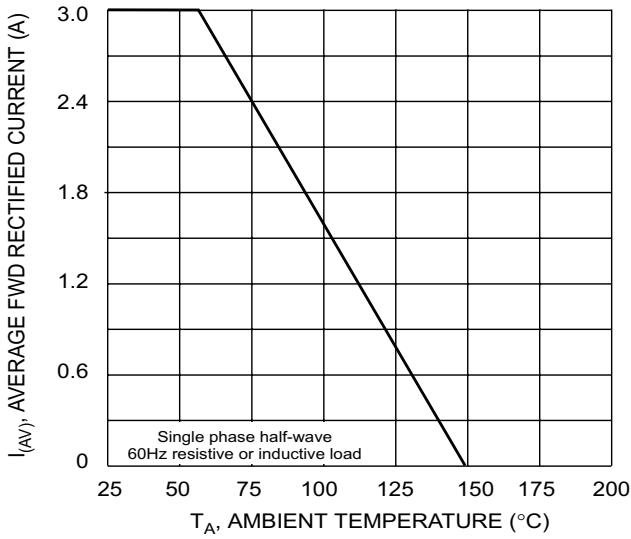


Fig. 1 Forward Current Derating Curve

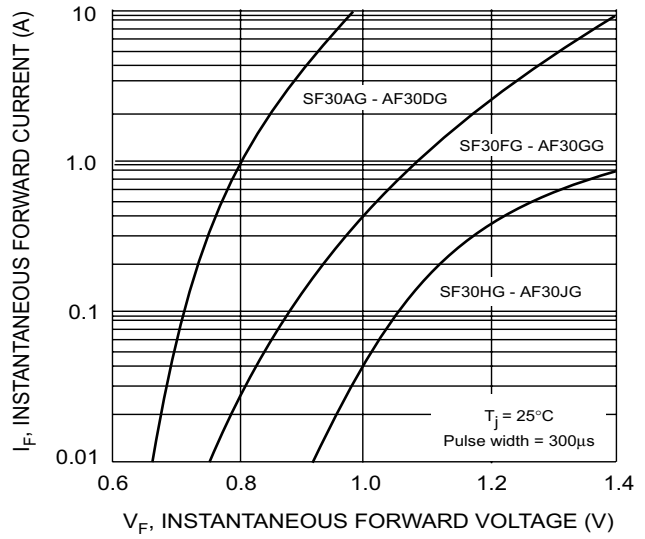


Fig. 2 Typical Forward Characteristics

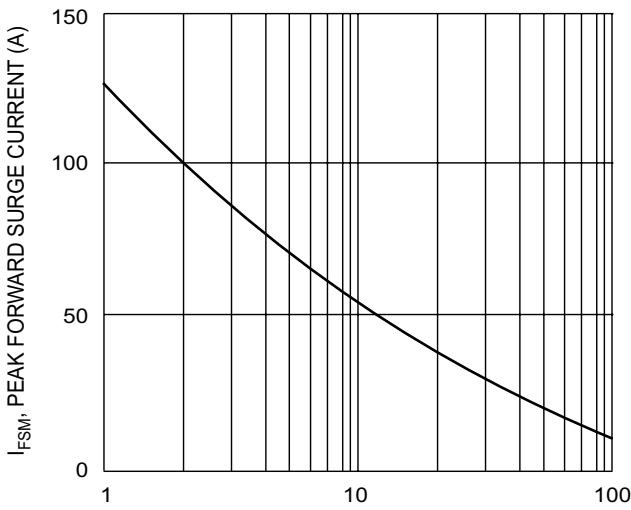


Fig. 3 Peak Forward Surge Current



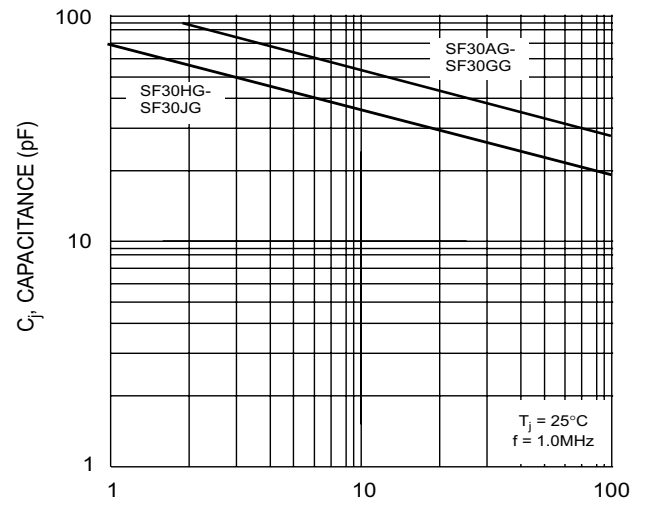


Fig. 4 Typical Junction Capacitance

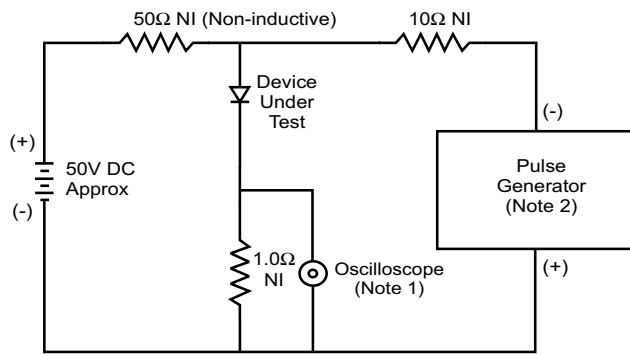

- Notes:
 1. Rise Time = 7.0ns max. Input Impedance = 1.0M Ω , 22pF.
 2. Rise Time = 10ns max. Input Impedance = 50 Ω .

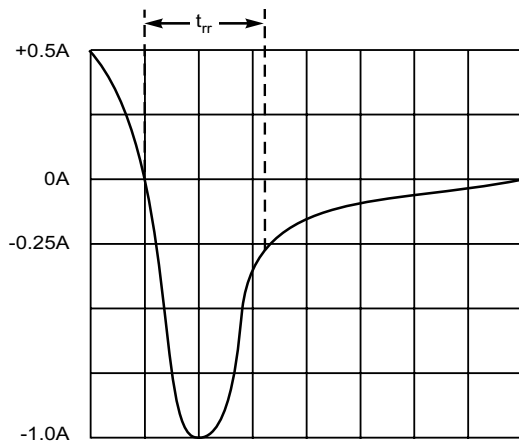

Set time base for 50/100 ns/cm

Fig. 5 Reverse Recovery Time Characteristic and Test Circuit