

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PINEBROOK, ILLINOIS

FED. MFR. CODE 91929

ASSEMBLY - TOGGLE SWITCH

CATALOG LISTING

6AT29

6AT29

M

DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO. SR 5210

16 APR. 56

CNT

CHECK

16 APR. 56

CORR.

O. M. W.
9 JULY 57

B CO13507
M B F
2 APR 59

C CO28982
R C R
14 MAY 71

D CO-58771
KAG
14 FEB 86

E CO-68001
SAV
20 JUL 90

F 205427
G J W
22 APR 02

G 205553
S A V
8 MAY 02

6.C.H. 16 APR. 56

CHECK


3 APR. 56

K.F.M.

3 APR. 56

DRAWN

74-98

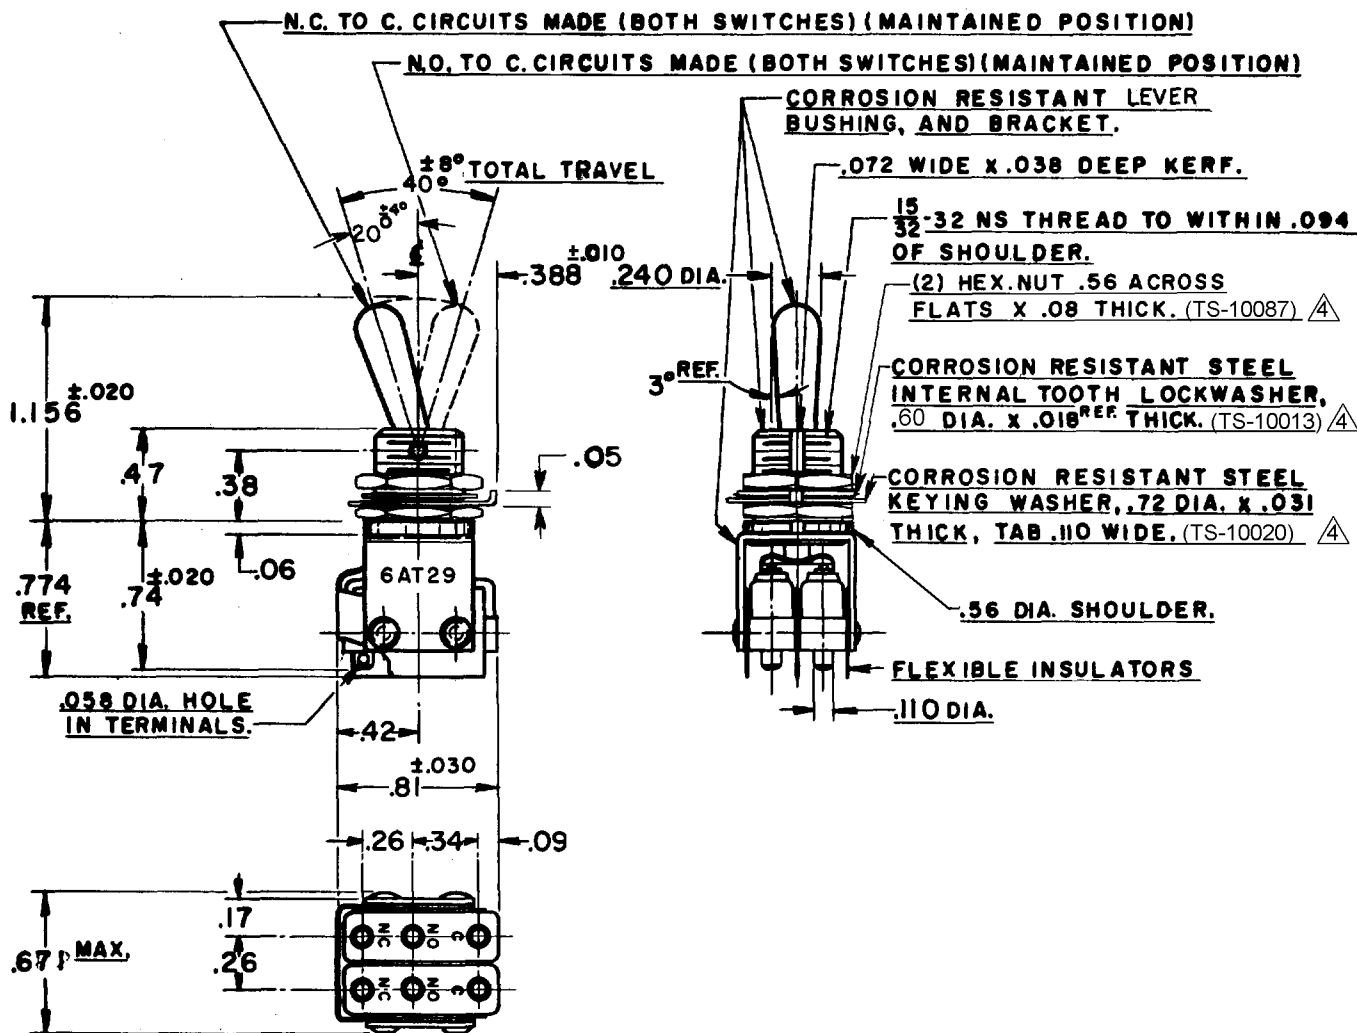

NOTES:

- 1 - UNIT INCLUDES (2) CATALOG LIST, ISMI BASIC SWITCH
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - TERMINALS ARE PLATED FOR SOLDERING
- 4 - HARDWARE FURNISHED UNASSEMBLED WITH SWITCH OR IN PACKET 15PA312-AT PER MIL - PRF-8805
- 5 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

CONTACT ARRANGEMENT

(2) S.P.D.T. (A)

250 VAC ————— 5 AMP

30 VOLTS DC RATING

INDUCTIVE ————— SEA LEVEL ——— 3 AMP

50,000 FT. ——— 2.5 AMP

RESISTIVE ————— SEA LEVEL ——— 5 AMP

50,000 FT. ——— 5 AMP

(B)

MAXIMUM INRUSH ————— 24 AMP

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.008
ANGLES ±

WEIGHT .06 LB.

RASTER