



## T-1 Sub-Midget Flange Base



| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM7234      | 5.0            | .030 | .030 | 16,000     | C-2F          |
| CM7235      | 5.0            | .080 | .150 | 3,000      | C-2R          |
| CM7236      | 5.0            | .115 | .200 | 5,000      | C-2R          |
| CM7237      | 5.0            | .120 | .200 | 5,000      | C-2R          |
| CM7238      | 5.0            | .115 | .100 | 10,000     | C-2R          |
| CM7239      | 5.0            | .125 | .250 | 5,000      | C-2R          |
| CM7250      | 5.0            | .045 | .040 | 10,000     | C-2R          |
| CM8022      | 5.0            | .020 | .030 | 10,000     | C-2R          |
| CM8605      | 5.0            | .017 | .005 | 10,000     | C-2R          |
| CM7240      | 10.0           | .027 | .100 | 10,000     | C-2F          |
| CM32        | 12.0           | .060 | .130 | 16,000     | C-2F          |
| CM22        | 14.0           | .040 | .130 | 10,000     | C-2V          |
| CM8112      | 14.0           | .065 | .150 | 10,000     | C-2F          |
| CM7241      | 18.0           | .026 | .150 | 10,000     | C-2F          |
| CM6839      | 28.0           | .024 | .130 | 4,000      | CC-2F         |

## T-1 Bi-Pin Base (.050")

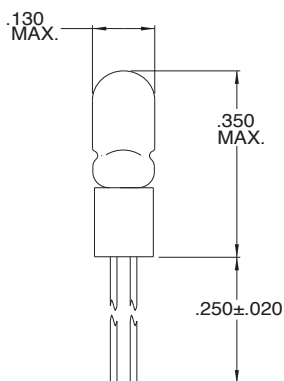

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM7252      | 1.25           | .012 | .004 | 1,000      | C-6           |
| CM7253      | 1.35           | .220 | .020 | 25,000     | C-2R          |
| CM7254      | 1.5            | .015 | .010 | 5,000      | C-2R          |
| CM7255      | 1.5            | .075 | .030 | 16,000     | C-2R          |
| CM7256      | 2.5            | .015 | .001 | 10,000     | C-2R          |
| CM7257      | 2.5            | .320 | .210 | 5,000      | C-2R          |
| CM7732      | 2.5            | .100 | .100 | 10,000     | C-2R          |
| CM3229      | 3.0            | .015 | .020 | 5,000      | C-6           |
| CM7258      | 3.0            | .008 | .001 | 16,000     | C-2R          |
| CM7259      | 3.0            | .013 | .001 | 16,000     | C-2R          |
| CM7260      | 3.0            | .060 | .030 | 100,000    | C-2R          |
| CM7261      | 3.0            | .120 | .150 | 16,000     | C-2R          |
| CM7022      | 5.0            | .020 | .030 | 10,000     | C-2R          |
| CM7262      | 5.0            | .017 | .005 | 10,000     | C-2R          |
| CM7263      | 5.0            | .030 | .030 | 16,000     | C-2R          |
| CM7264      | 5.0            | .045 | .040 | 10,000     | C-2R          |
| CM7265      | 5.0            | .060 | .150 | 5,000      | C-2R          |
| CM7266      | 5.0            | .080 | .150 | 15,000     | C-2R          |
| CM7267      | 5.0            | .115 | .200 | 5,000      | C-2R          |
| CM7268      | 5.0            | .125 | .250 | 5,000      | C-2R          |
| CM7270      | 5.0            | .060 | .030 | 60,000     | C-2R          |
| CM7271      | 5.0            | .060 | .050 | 40,000     | C-2R          |