


© 2014 Glenair, Inc.

## Series 845 Stinger™ Mighty Mouse Triple–Start ACME Thread Plug 845-001 and 845-002 Ordering Information



Series 845 Mighty Mouse Plug with Stinger<sup>™</sup> Contacts these durable, low insertion force front release size #28 contacts feature integrated retention clips and O-ring sealing for optimized performance. Series 845 shells feature a Triple–start stub ACME mating thread for improved protection against cross–mating and thread damage. Connector shells are machined aluminum or stainless steel. Available in shell sizes 8 through 13 in 6 contact arrangements, all arrangements include a minimum of two guide pins.

How To Order							
Sample Part Number		845-001	-16	м	8-10	Ρ	A
Series (See Table I)	845-001 = Plug with Integrated Banding Porch 845-002 = Plug with Accessory Thread	-					
Shell Style	-16 = Plug with Anti-Decoupling Spring		_				
Shell Material and Finish	<ul> <li>M = Aluminum/Electroless Nickel RoHS Compliant</li> <li>MT = Aluminum/Nickel-PTFE RoHS Compliant</li> <li>NF = Aluminum/Cadmium with Olive Drab Chromate</li> <li>ZNU = Aluminum/Zinc-Nickel with Black Chromate</li> <li>Z1 = Stainless Steel/Passivated RoHS Compliant</li> </ul>						
Shell Size - Insert Arrangement	8-10, 9-20, 10-28, 11-40, 12-58, 13-71						
Contact Type	P = Pin with O-ring S = Socket with O-ring						
Shell Key Positions (See Table II)	<b>A</b> = Normal <b>B</b> = Pos. B <b>C</b> = Pos. C <b>D</b> = Pos. D <b>E</b> = Pos. F	<b>F</b> = Pos. F					2

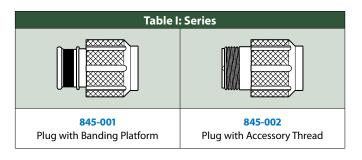

Dimensions in Inches (millimeters) are subject to change without notice.

U.S. CAGE Code 06324

 GLENAIR, INC.
 1211
 AIR
 WAY
 GLENDALE,
 CA
 91201-2497
 818-247-6000
 FAX
 818-500-9912

 www.glenair.com
 M-16
 E-Mail: sales@glenair.com

Series 80 Mighty Mouse