




**Voidless Hermetically Sealed Surface Mount Bidirectional Transient Voltage Suppressors**  
 Qualified to MIL-PRF-19500/516

*Qualified Levels:*  
 JAN, JANTX, JANTXV  
 and JANS

**DESCRIPTION**

This surface mount series of industry recognized voidless, hermetically sealed, bidirectional Transient Voltage Suppressor (TVS) designs are military qualified to MIL-PRF-19500/516 and are ideal for high-reliability applications where a failure cannot be tolerated. They provide a working peak “standoff” voltage selection from 5.2 to 152 volts with a 1500 watt rating for a 10/1000 us pulse. They are very robust in hard-glass construction and use internal Category 1 metallurgical bonds for high reliability. These are also available as both a non suffix part and an “A” version part involving different voltage tolerances as further described in the [nomenclature](#) section. These devices are also available in axial-leaded packages for thru-hole mounting.



**“C” or SQ-MELF Package**

**Important:** For the latest information, visit our website <http://www.microsemi.com>.


Also available in:

**FEATURES**

- High surge current and peak pulse power provides transient voltage protection for sensitive circuits
- Triple-layer passivation
- Internal “Category 1” metallurgical bonds
- Voidless hermetically sealed glass package
- JAN, JANTX, JANTXV and JANS qualified versions are available per MIL-PRF-19500/516. (See [part nomenclature](#) for all available options.)
- RoHS compliant versions available (commercial grade only)

**“C” Package**

(axial-leaded)



**APPLICATIONS / BENEFITS**

- Military and other high-reliability applications
- Extremely robust construction
- Extensive range in working peak “standoff” voltage ( $V_{WM}$ ) from 5.2 to 152 volts
- 1500 watt peak pulse power ( $P_{PP}$ ) for a 10/1000 us pulse
- ESD and EFT protection per IEC6100-4-2 and IEC61000-4-4 respectively
- Protection from the secondary effects of lightning per select levels in IEC61000-4-5
- Square-end-cap terminals for easy placement
- Non-sensitive to ESD per MIL-STD-750 method 1020
- Inherently radiation hard as described in Microsemi “[MicroNote 050](#)”

**MAXIMUM RATINGS @  $T_A = 25^\circ\text{C}$  unless otherwise noted.**

| Parameters/Test Conditions  | Symbol              | Value       | Unit               |
|---|---------------------|-------------|--------------------|
| Junction and Storage Temperature                                  | $T_J$ and $T_{STG}$ | -55 to +175 | $^\circ\text{C}$   |
| Thermal Resistance Junction-to-End Cap                            | $R_{\theta JEC}$    | 5.0         | $^\circ\text{C/W}$ |
| Peak Pulse Power @ $25^\circ\text{C}$ (10/1000 $\mu\text{s}$ )    | $P_{PP}$            | 1500        | W                  |
| Off-State Power up to $T_{EC} = 150^\circ\text{C}$ <sup>(1)</sup> | $P_D$               | 5.0         | W                  |
| Off-State Power @ $T_A = 25^\circ\text{C}$ <sup>(2)</sup>         | $P_D$               | 3.0         | W                  |
| Impulse Repetition Rate   | df                  | 0.01        | %                  |
| Solder Temperature @ 10 s   | $T_{SP}$            | 260         | $^\circ\text{C}$   |

**Notes:** 1. Linearly derate above  $T_{EC} = 150^\circ\text{C}$  to zero at  $T_{EC} = 175^\circ\text{C}$ .  
 2. Steady-state power ratings with reference to ambient are for PC boards where thermal resistance from mounting point to ambient is sufficiently controlled where  $T_{OP}$  or  $T_{J(MAX)}$  is not exceeded (also see [figure 6](#)).

**MSC – Lawrence**

6 Lake Street,  
 Lawrence, MA 01841  
 Tel: 1-800-446-1158 or  
 (978) 620-2600  
 Fax: (978) 689-0803

**MSC – Ireland**

Gort Road Business Park,  
 Ennis, Co. Clare, Ireland  
 Tel: +353 (0) 65 6840044  
 Fax: +353 (0) 65 6822298

**Website:**

[www.microsemi.com](http://www.microsemi.com)

**MECHANICAL and PACKAGING**

- CASE: Hermetically sealed voidless hard glass with tungsten slugs
- TERMINALS: Tin/lead plate over copper. RoHS compliant matte-tin is available on commercial grade only.
- MARKING: None
- POLARITY: No polarity marking for these bidirectional TVSs
- TAPE & REEL option: Standard per EIA-481-B. Consult factory for quantities.
- WEIGHT: Approximately 1100 milligrams
- See [package dimensions](#) on last page.

**PART NOMENCLATURE**

**JAN 1N6138 A US e3**

**Reliability Level**

JAN = JAN Level  
 JANTX = JANTX Level  
 JANTXV = JANTXV Level  
 JANS = JANS level  
 Blank = commercial

**JEDEC type number**

See [Electrical Characteristics](#) table

**RoHS Compliance**

e3 = RoHS compliant (available on commercial grade only)  
 Blank = non-RoHS compliant

**Surface Mount Package**
**Voltage Tolerance**

A = Standard  
 Blank = 5% higher  $V_C$ , 5% lower min.  $V_{(BR)}$  and 5% lower  $I_{PP}$

**SYMBOLS & DEFINITIONS**


| Symbol           | Definition   |
|------------------|--|
| $\alpha_{V(BR)}$ | Temperature Coefficient of Breakdown Voltage: The change in breakdown voltage divided by the change in temperature that caused it expressed in %/°C or mV/°C.                                  |
| $V_{(BR)}$       | Breakdown Voltage: The voltage across the device at a specified current $I_{(BR)}$ in the breakdown region.  |
| $V_{WM}$         | Working Standoff Voltage: The maximum-rated value of dc or repetitive peak positive cathode-to-anode voltage that may be continuously applied over the standard operating temperature.         |
| $I_D$            | Standby Current: The current through the device at rated stand-off voltage.  |
| $V_C$            | Clamping Voltage: The voltage across the device in a region of low differential resistance during the application of an impulse current ( $I_{PP}$ ) for a specified waveform.                 |
| $P_{PP}$         | Peak Pulse Power. The rated random recurring peak impulse power or rated nonrepetitive peak impulse power. The impulse power is the maximum-rated value of the product of $I_{PP}$ and $V_C$ . |

**ELECTRICAL CHARACTERISTICS**


| INDUSTRY<br>TYPE NUMBER<br>(Note 1) | MINIMUM<br>BREAKDOWN<br>VOLTAGE<br>(Note 1) |                     | RATED<br>STANDOFF<br>VOLTAGE | MAXIMUM<br>STANDBY<br>CURRENT | MAXIMUM<br>CLAMPING<br>VOLTAGE<br>(Note 1) | MAXIMUM<br>PEAK PULSE<br>CURRENT<br>(Note 1) | MAXIMUM<br>TEMP.<br>COEF. OF<br>V <sub>(BR)</sub><br>αV <sub>(BR)</sub> |
|-------------------------------------|---|---------------------|------------------------------|-------------------------------|--|--|---|
|                                     | V <sub>(BR)</sub>                           | @ I <sub>(BR)</sub> |                              |                               |  |  |   |
|                                     | Volts                                       | mA                  | V                            | μA                            | Volts                                      | Amps   | %/°C  |
| 1N6138AUS                           | 6.46  | 175                 | 5.2                          | 500                           | 10.5                                       | 142.8  | 0.05  |
| 1N6139AUS                           | 7.13  | 175                 | 5.7                          | 300                           | 11.2                                       | 133.9  | 0.06  |
| 1N6140AUS                           | 7.79  | 150                 | 6.2                          | 100                           | 12.1                                       | 124.0  | 0.06  |
| 1N6141AUS                           | 8.65  | 150                 | 6.9                          | 100                           | 13.4                                       | 111.9  | 0.06  |
| 1N6142AUS                           | 9.50  | 125                 | 7.6                          | 100                           | 14.5                                       | 103.4  | 0.07  |
| 1N6143AUS                           | 10.45                                       | 125                 | 8.4                          | 20                            | 15.6                                       | 96.2   | 0.07  |
| 1N6144AUS                           | 11.40                                       | 100                 | 9.1                          | 20                            | 16.9                                       | 88.8   | 0.07  |
| 1N6145AUS                           | 12.35                                       | 100                 | 9.9                          | 20                            | 18.2                                       | 82.4   | 0.08  |
| 1N6146AUS                           | 14.25                                       | 75                  | 11.4                         | 20                            | 21.0                                       | 71.4   | 0.08  |
| 1N6147AUS                           | 15.20                                       | 75                  | 12.2                         | 20                            | 22.3                                       | 67.3   | 0.08  |
| 1N6148AUS                           | 17.10                                       | 65                  | 13.7                         | 10                            | 25.1                                       | 59.8   | 0.085   |
| 1N6149AUS                           | 19.0  | 65                  | 15.2                         | 5                             | 27.7                                       | 54.2   | 0.085   |
| 1N6150AUS                           | 20.9  | 50                  | 16.7                         | 5                             | 30.5                                       | 49.2   | 0.085   |
| 1N6151AUS                           | 22.8  | 50                  | 18.2                         | 5                             | 33.3                                       | 45.0   | 0.09  |
| 1N6152AUS                           | 25.7  | 50                  | 20.6                         | 5                             | 37.4                                       | 40.1   | 0.09  |
| 1N6153AUS                           | 28.5  | 40                  | 22.8                         | 5                             | 41.6                                       | 36.0   | 0.09  |
| 1N6154AUS                           | 31.4  | 40                  | 25.1                         | 5                             | 45.7                                       | 32.8   | 0.095   |
| 1N6155AUS                           | 34.2  | 30                  | 27.4                         | 5                             | 49.9                                       | 30.1   | 0.095   |
| 1N6156AUS                           | 37.1  | 30                  | 29.7                         | 5                             | 53.6                                       | 28.0   | 0.095   |
| 1N6157AUS                           | 40.9  | 30                  | 32.7                         | 5                             | 59.1                                       | 25.4   | 0.095   |
| 1N6158AUS                           | 44.7  | 25                  | 35.8                         | 5                             | 64.6                                       | 23.2   | 0.095   |
| 1N6159AUS                           | 48.5  | 25                  | 38.8                         | 5                             | 70.1                                       | 21.4   | 0.095   |
| 1N6160AUS                           | 53.2  | 20                  | 42.6                         | 5                             | 77.0                                       | 19.5   | 0.095   |
| 1N6161AUS                           | 58.9  | 20                  | 47.1                         | 5                             | 85.3                                       | 17.6   | 0.100   |
| 1N6162AUS                           | 64.6  | 20                  | 51.7                         | 5                             | 97.1                                       | 15.4   | 0.100   |
| 1N6163AUS                           | 71.3  | 20                  | 56.0                         | 5                             | 103.1                                      | 14.5   | 0.100   |
| 1N6164AUS                           | 77.9  | 15                  | 62.2                         | 5                             | 112.8                                      | 13.3   | 0.100   |
| 1N6165AUS                           | 86.5  | 15                  | 69.2                         | 5                             | 125.1                                      | 12.0   | 0.100   |
| 1N6166AUS                           | 95.0  | 12                  | 76.0                         | 5                             | 137.6                                      | 10.9   | 0.100   |
| 1N6167AUS                           | 104.5                                       | 12                  | 86.6                         | 5                             | 151.3                                      | 9.9  | 0.100   |
| 1N6168AUS                           | 114.0                                       | 10                  | 91.2                         | 5                             | 165.1                                      | 9.1  | 0.100   |
| 1N6169AUS                           | 123.5                                       | 10                  | 98.8                         | 5                             | 178.8                                      | 8.4  | 0.105   |
| 1N6170AUS                           | 142.5                                       | 8                   | 114.0                        | 5                             | 206.3                                      | 7.3  | 0.105   |
| 1N6171AUS                           | 152.0                                       | 8                   | 121.6                        | 5                             | 218.4                                      | 6.9  | 0.105   |
| 1N6172AUS                           | 171.0                                       | 5                   | 136.8                        | 5                             | 245.7                                      | 6.1  | 0.110   |
| 1N6173AUS                           | 190.0                                       | 5                   | 152.0                        | 5                             | 273.0                                      | 5.5  | 0.110   |

**Notes:** 1. Part number without the A suffix has 5% higher V<sub>C</sub>, 5% lower minimum V<sub>(BR)</sub>, and 5% lower I<sub>PP</sub>.

GRAPHS

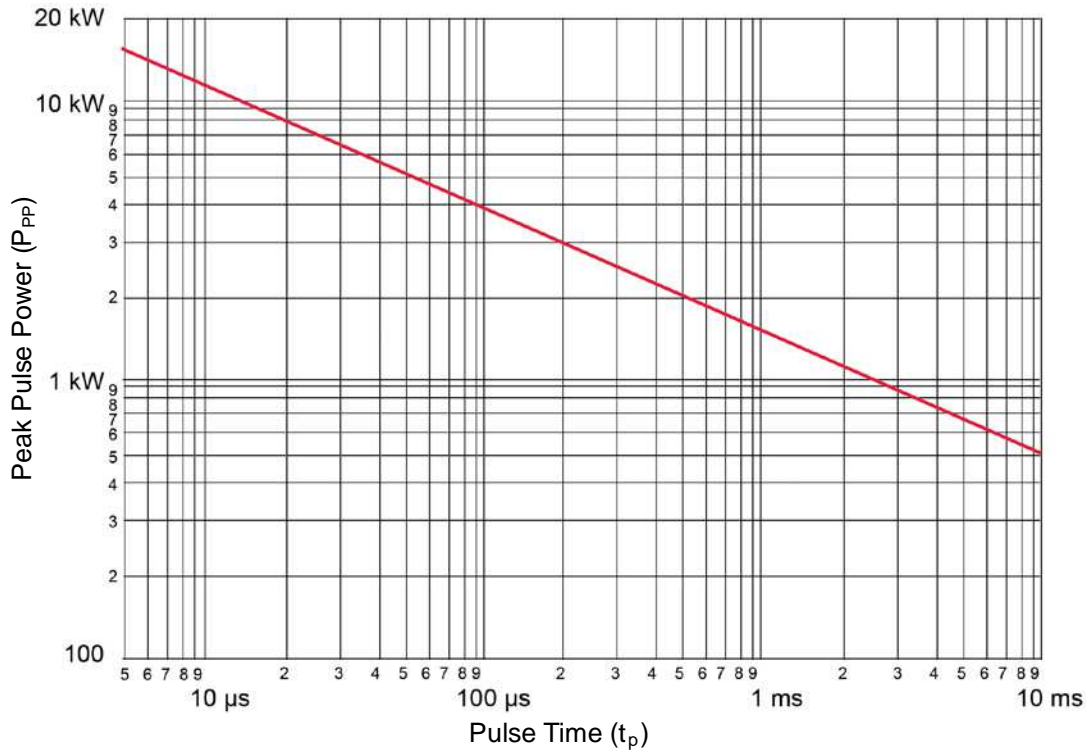


**FIGURE 1**  
Peak Pulse Power vs. Pulse Time

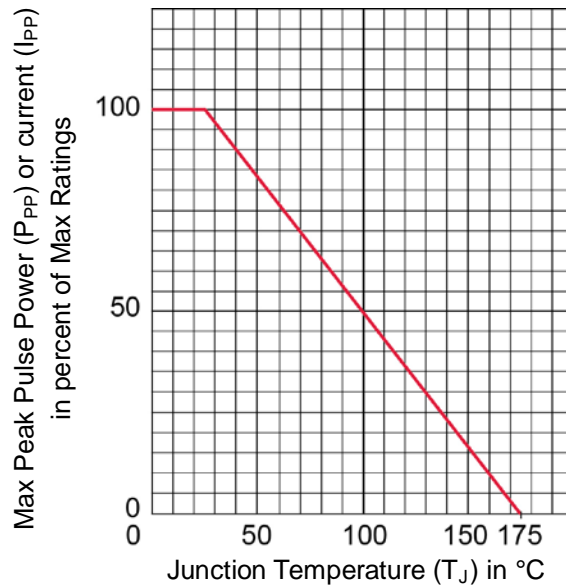


**FIGURE 2**  
Peak Pulse Power vs  $T_J$  (prior to impulse)

GRAPHS

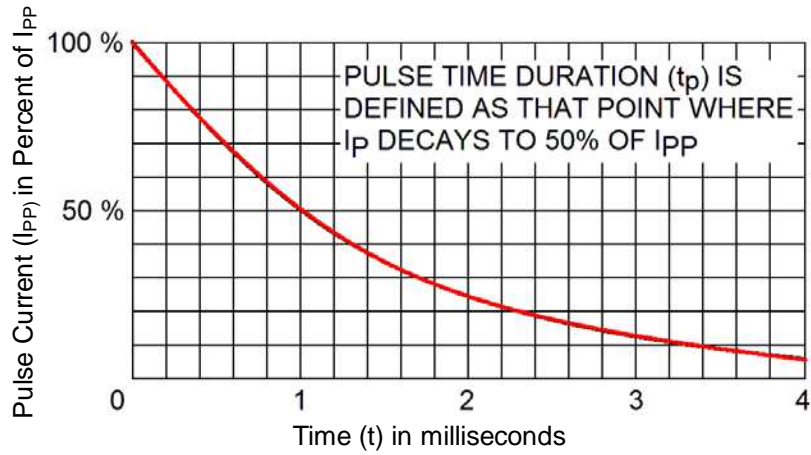


**FIGURE 3**  
Pulse Wave Form

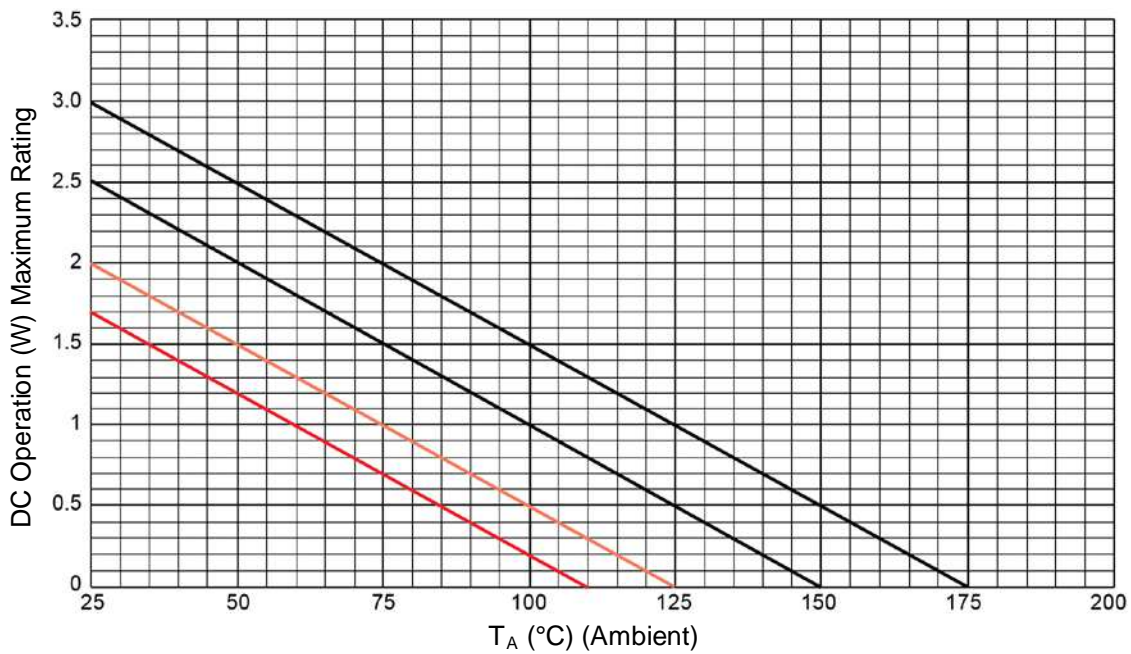


**FIGURE 4**  
Temperature-Power Derating Curve

GRAPHS

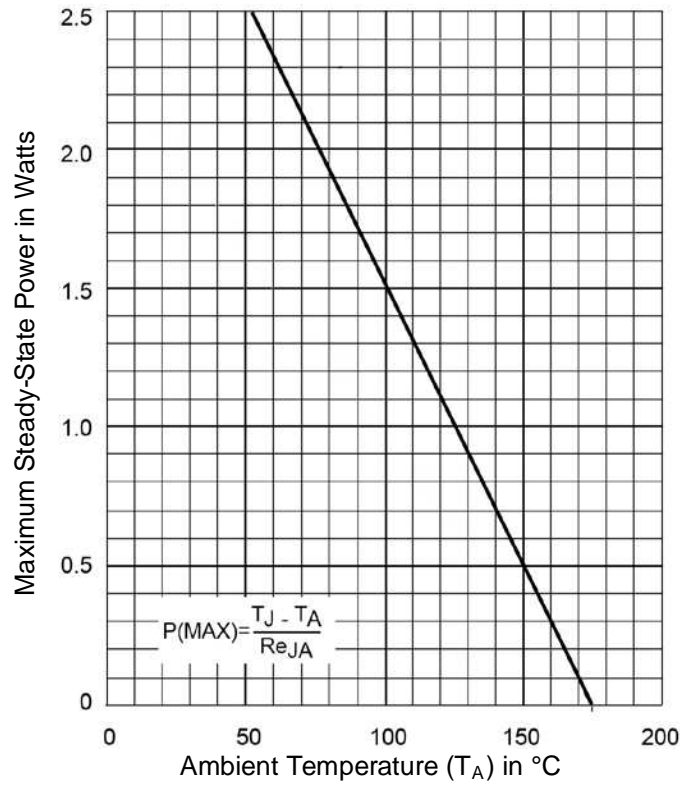


**FIGURE 5**  
Steady-State Derating Curve for Free-Air Mounting ( $R_{\theta JA} = 50 \text{ }^\circ\text{C/W}$ )

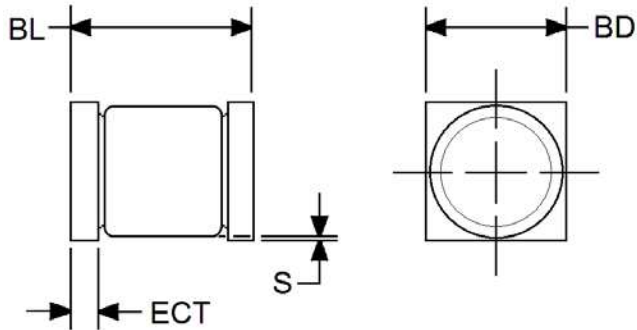**PACKAGE DIMENSIONS**


| Ltr        | Dimensions |       |             |      | Notes |
|------------|------------|-------|-------------|------|-------|
|            | Inch       |       | Millimeters |      |       |
|            | Min        | Max   | Min         | Max  |       |
| <b>BD</b>  | 0.183      | 0.202 | 4.65        | 5.13 |       |
| <b>BL</b>  | 0.205      | 0.245 | 5.21        | 6.22 |       |
| <b>ECT</b> | 0.019      | 0.028 | 0.48        | 0.71 |       |
| <b>S</b>   | 0.003      | -     | 0.08        | -    | 4     |

**NOTES:**

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Minimum clearance of glass body to mounting surface on all orientations.
4. In accordance with ASME Y14.5M, diameters are equivalent to  $\Phi$ x symbology.

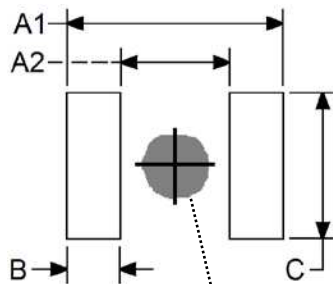**PAD LAYOUT**


| DIM       | INCH  | MILLIMETERS |
|-----------|-------|-------------|
| <b>A1</b> | 0.310 | 7.87        |
| <b>A2</b> | 0.170 | 4.32        |
| <b>B</b>  | 0.070 | 1.78        |
| <b>C</b>  | 0.205 | 5.21        |

**NOTE:** If mounting requires adhesive separate from the solder, an additional 0.090 inch (2.29 mm) diameter contact may be placed in the center between the pads as an optional spot for cement.