


CD45-E2GA332M-VKA



Applications	Commercial Grade
Feature	<div style="display: flex; flex-direction: column; gap: 5px;"> <div> Mid Voltage (100 to 630V)</div> <div> Safety Standard Approved</div> <div> Halogen-free</div> </div>
Series	CD45
Status	Production



Size	
Diameter(D)	11.00mm Max.
Thickness(T)	6.00mm Max.
Lead Gap(F)	10.00mm ±1.00mm
Lead Diameter(d)	0.60mm ±0.05mm

Electrical Characteristics	
Capacitance	3.3nF ±20%
Rated Voltage	400VAC
Withstanding Voltage	4kVAC
Temperature Characteristic	E(+20,-55%)
Dissipation Factor (Max.)	2.5%
Insulation Resistance (Min.)	10000MΩ




Other	
Soldering Method	Flow Iron Soldering
Lead Length / Package Type	Taping
AEC-Q200	No
Package Quantity	1000pcs

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

CD45-E2GA332M-VKA



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

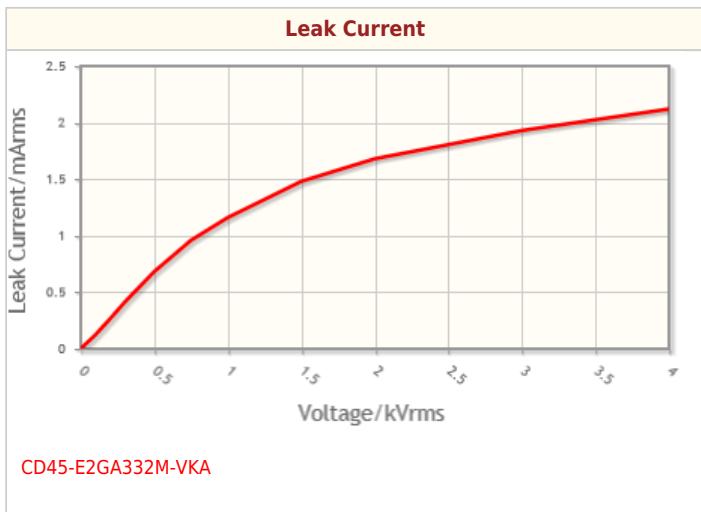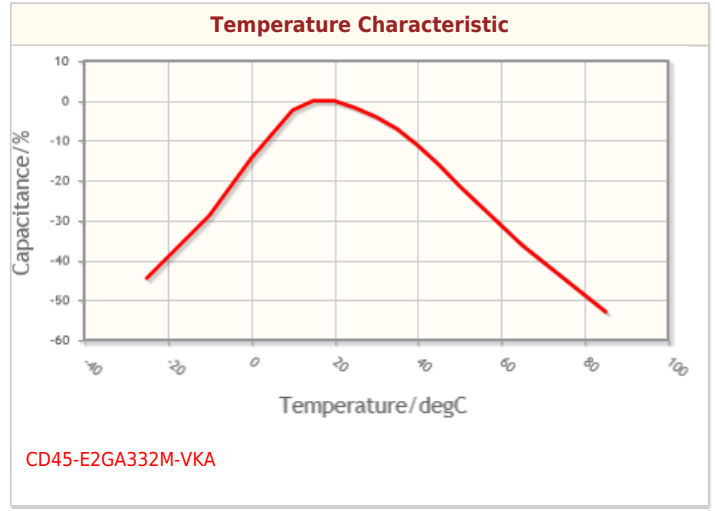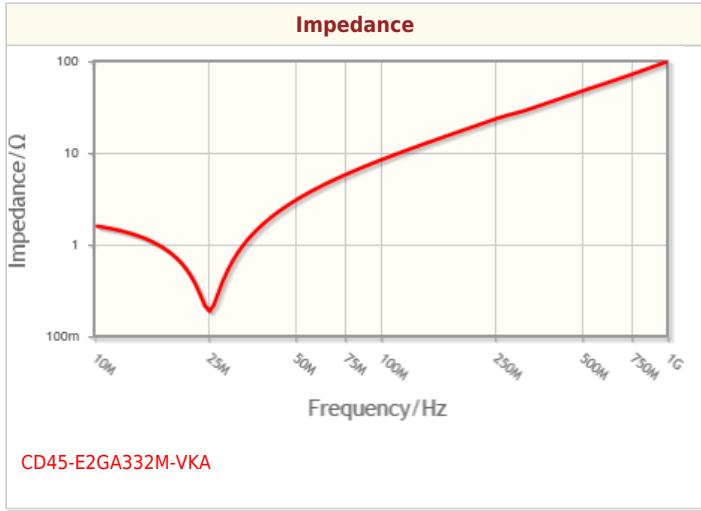

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.