


CLE234E

Very High Output Aluminum Gallium Arsenide Quad chip IRED Array



March, 2006

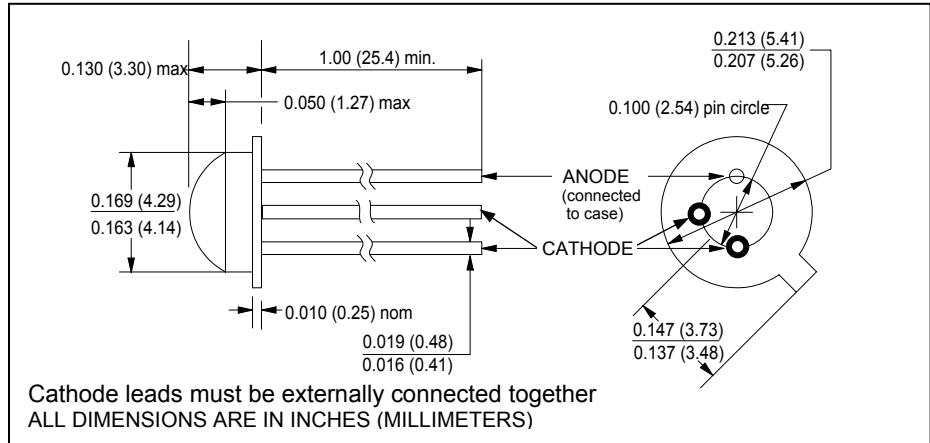

features

- very wide emission angle
- 880nm wavelength
- TO-46 header with epoxy dome
- High power output

description

The CLE234E is an advanced, high efficiency, high speed AlGaAs infrared-emitting diode with four times the emitting surface of the typical AlGaAs emitter. High power output is achieved with four equally spaced cathode contacts for higher current distribution. Cathode contacts are bonded in pairs, each pair bonded to a separate lead, which need to be connected during operation. Chip size is 0.030" by 0.030". The TO-46 header provides reliable operation over a wide temperature range.

absolute maximum ratings ($T_A = 25^\circ\text{C}$ unless otherwise stated)

storage temperature	-40°C to +125°C
operating temperature	-40°C to +100°C
lead soldering temperature ⁽¹⁾	260°C
continuous forward current ⁽²⁾⁽⁴⁾	500mA
peak forward current (1.0ms pulse width, 10% duty cycle)	4A
reverse voltage	5V
continuous power dissipation ⁽³⁾	500mW

notes:

1. 0.06" (1.5mm) from the header for 5 seconds maximum.
2. Derate linearly 4.0mA/°C from 25°C free air temperature to $T_A = +125^\circ\text{C}$.
3. Derate linearly 4.0mW/°C from 25°C free air temperature to $T_A = +125^\circ\text{C}$.
4. Operation at this level requires a proper heat sink.

electrical characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

symbol	parameter	min	typ	max	units	test conditions
P_O	Total power output	-	8.0	-	mW	$I_F = 100\text{mA}$
V_F	Forward voltage	-	1.65	1.8	V	$I_F = 100\text{mA}$
I_R	Reverse current	-	-	10	μA	$V_R = 5\text{V}$
λ_p	Peak emission wavelength	-	880	-	nm	$I_F = 100\text{mA}$
BW	Spectral bandwidth at half power	-	45	-	nm	$I_F = 100\text{mA}$
θ_{HP}	Emission angle at half power points	-	100	-	deg.	$I_F = 100\text{mA}$
t_r, t_f	Radiation rise and fall time	-	700	-	ns	$I_{F(PK)} = 100\text{mA}, f = 1\text{kHz}, \text{D.C.} = 50\%$

Clairex reserves the right to make changes at any time to improve design and to provide the best possible product.

Revised 3/15/06

Clairex Technologies, Inc.
Phone: 972-265-4900

1301 East Plano Parkway
Fax: 972-265-4949

Plano, Texas 75074-8524
www.clairex.com